



Klaxalarm

- Battery or main rechargeable units
- Choice of electronic sounder (Terrier) or bell (Bulldog)
- Rugged metal construction
- Simple to install and operate
- Units can be expanded to form a complete system

The Klaxalarm is a standalone, self-contained fire alarm designed for use in small retail, industrial or temporary buildings as well as construction sites, campsites or marquees. In addition, it can be used as a temporary alarm when the main fire alarm system is under maintenance.

Klaxalarm is available as a battery-only unit or as a mains unit with battery back-up and a choice of electronic sounder (Terrier) or bell (Bulldog) as the warning device.

The battery-powered versions can be interlinked to each other to provide additional coverage so that when one callpoint is activated, all the other units sound. Fitted with a PP9 battery, these units will operate in standby mode for over 12 months and an audible warning is emitted when the battery power level becomes low.

The mains-powered units conform to the requirements of BS 5839 Part 1 (Manual Fire Alarms) and may be expanded using additional call points and sounders using a two core cable loop.

The Klaxalarm range is designed for ease of installation and is a simple low cost solution for many premises that require fire alarms under the Fire Precautions (Workplace) Regulations 1997 (as amended) 1999.


Applications

- Small retail and industrial units
- Temporary buildings and marquees
- Construction sites
- Camp sites
- Multiple occupancy buildings

Fire ✓
Security ✗

Industrial ✗
Railway/Marine ✗

Hazardous Area ✗
Public Warning ✗

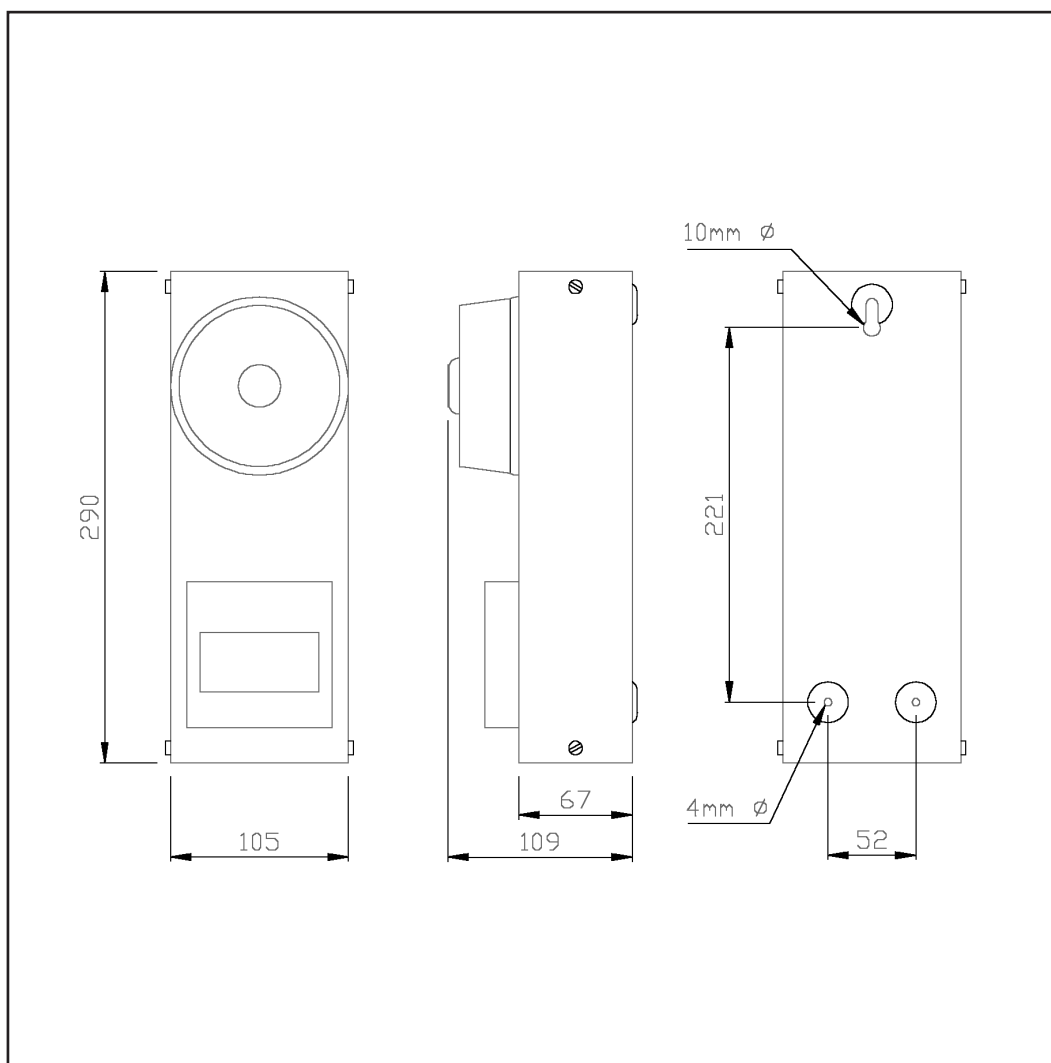

Part No.	Colours	Audibility at 1m	Tones	Voltage	Current
Terrier Battery					
18-980181	Red	97dB (A) ± 3 dB	3	PP9 battery	N/A
Bulldog Battery					
18-980183	Red	99dB (A) ± 3 dB	1	PP9 battery	N/A
Terrier Mains					
18-980184	Red	99dB (A) ± 3 dB	3	230V AC	< 1A
Bulldog Mains					
18-980186	Red	99dB (A) ± 3 dB	1	230V AC	< 1A

IP Rating: Indoor use only (weatherproof option available on request)
Rating Continuous
Frequency: N/A
Operating temp: -15°C to +45°C
Construction: Mild steel case
Weight: Terrier battery: 1.5kg
 Bulldog battery: 2.5kg
 Terrier mains: 2.6kg
 Bulldog mains: 3.5kg