

Kontaktteile

Pièces de raccord

Contacts

Werkstoff:

BZ = Bronze
MS = Messing

Matière:

BZ = bronze
MS = laiton

Material:

BZ = bronze
MS = brass

Oberflächenbehandlung: Code

bl = blank (0)
ag = versilbert (1)
au = vergoldet (2)
ni = vernickelt (5)
sn = verzinkt (8)

Traitements de surface: Code

bl = brut (0)
ag = argenté (1)
au = doré (2)
ni = nickelé (5)
sn = étamé (8)

Surface-plating: Code

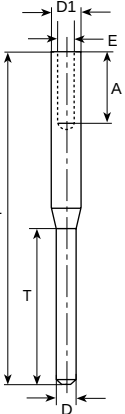





bl = clean (0)
ag = silver-plated (1)
au = gold-plated (2)
ni = nickel-plated (5)
sn = tin-plated (8)

Bestellbeispiel:

Exemple de commande:

Example of order:

1368.68
(1368 MS sn)

 Artikel-Nr. Numéro d'article Part-No. → Print Bohrung Trou Hole → Stand.-Packg. Werkzeuge Outils / Tools	Ø 1.3		Ø 2.0		für Stecker pour fiche for plug 	Ø 0.9	Ø 1.0	
	 1368.6() MS Ø 1.3 T 10 L 22 D Ø 1.3 D1 Ø 2 A 5 E Ø 1.1 500 4518N		 1369.6() MS Ø 2 T 11.5 L 24 D Ø 2 D1 Ø 4 A 10 E Ø 3.2 200 4521			 1349.6() MS Ø 0.8 T 3.2 L 9.2 A 5 B2 1.4 B1 Ø 1.8 B 0.8 S 0.25 1000	 1345.2() BZ Ø 1.3 T 5 L 15 A 5.9 B2 2.6 B1 Ø 2.6 B 1.3 S 0.3 1000	 1346.2() BZ Ø 1.1 T 4.5 L 11 A 5.9 B2 2 B1 Ø 2.6 B 1 S 0.3 1000
	Ø 1.0		Ø 1.3			Ø 1.6		
	 1344.2() BZ 1344.6() MS A 5.9 L 16 C 2.6 B1 2.6 B 2.6 N 1.3 N1 4 S 0.3 2000		 1344A.2() BZ A 6.5 L 15 C 2 B1 1.9 B 2 N 1 N1 3 S 0.3 2000			 1361.6() MS A 5.5 L 13.5 C 2.2 B1 3.8 B - mm² 0.3-0.5 N1 - S 0.25 1000	 1360.2() BZ A 5.5 L 13.5 C 2.2 B1 3.8 B 2.5 N 1.2 N1 2.2 S 0.25 1000	 1346B.2() BZ A 7.2 L 18 C 2.2 B1 2.4 B 2.5 N 1.3 N1 3.2 S 0.3 1000