

### CST206K

#### Description:

This kit contains representative samples of our high frequency current sense transformers. They are useful for a variety of developmental needs including circuit simulation, circuit testing, prototyping and agency evaluations. All items in this kit meet specifications listed in the catalog section referring to the product. This kit is housed in an easy to see, easy to store clear polycarbonate box with a convenient snap closing hinged lid.



#### Electrical Specifications (@25C):

Part No.	ET V $\mu$ Sec REF 20kHz	Turns Count	Min. Ind. mH	DCR Max. $\Omega$	Pri. Amps
<a href="#">CST206-1A</a>	2000	100	14.0	.580	110.0 RMS
<a href="#">CST206-1T</a>	2000	100 CT	14.0	.580	110.0 RMS
<a href="#">CST206-2A</a>	4000	200	56.0	3.50	80.0 RMS
<a href="#">CST206-2T</a>	4000	200 CT	56.0	3.50	80.0 RMS
<a href="#">CST206-3A</a>	6000	300	130.0	12.40	70.0 RMS
<a href="#">CST206-3T</a>	6000	300 CT	130.0	12.40	70.00 RMS



#### Dimensions:

**Height** = 2.0"

**Width** = 3.75"

**Length** = 2.5"

**Weight** = 0.25 Lbs.

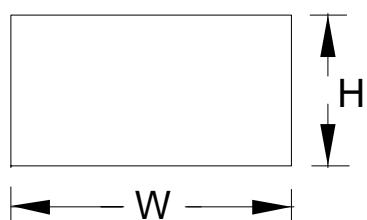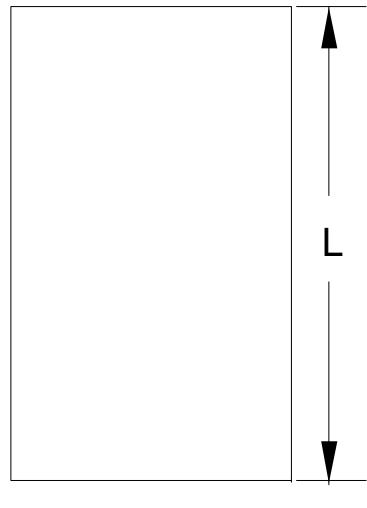

For more detailed specifications on individual parts, click on the part number or visit us at [www.TriadMagnetics.com](http://www.TriadMagnetics.com)

**RoHS Compliance:** As of manufacturing date February 2005, all standard products meet the requirements of 2002/95/EC, known as the RoHS initiative.

\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Triad Magnetics:](#)

[CST206K](#)