



- Small Size & Lightweight
- PCB Board Mountable
- Wide Range Input
- Medical Safety Certifications (4kVAC Input - Output)
- Class II (No ground needed)

Key Market Segments & Applications

Portable Medical Equipment
General Low Power Applications

KM Series

15 to 40W Medical AC-DC
PCB- Mount Power Supplies

KM Features and Benefits

Features

- Small Size
- Wide Input Range
- High efficiency

Benefits

- Minimises PCB Space
- Global use with no manual intervention
- Lower Heat Dissipated in System

Specifications

MODELS		KMS15	KMD15	KMT15	KMS40	KMD40	KMT40
ITEMS							
Input Voltage Range	-	90-264VAC 47-440Hz or 100-375VDC					
Inrush Current Limiting	A	10 / 20A, cold start, 25°C ambient (115 / 230VAC)					
Input Current (115 / 230VAC)	mA	220 / 118mA			860 / 460mA		
Internal Fuse (live line) ⁽¹⁾	-	250V/T2A			250V/T3.15A		
Temperature Coefficient (O/PV)	-	±0.01%/°C					
Ripple and Noise (pk-pk)	mV	50mV or 1%, whichever is greater					
Overcurrent Protection	-	> 105%, hiccup mode, automatic recovery					
Overvoltage Protection	%	Yes, Zener diode clamp					
Hold-up Time (typical)	ms	20ms			18ms		
Enclosure Leakage 240Vac, 63Hz	mA	0.055 max			0.08 max		
264Vac, 63Hz	mA	0.06 max			0.085 max		
Operating Temperature	-	-25°C to 70°C, derate linearly to 50% load from 50°C to 70°C. Max case temperature 95°C					
Storage Temperature	-	-40°C to 100°C					
Humidity	%RH	20% to 95% RH (non-condensing)					
Cooling	-	Convection, over temperature protected ~100°C case temperature)					
Withstand Voltage	VAC	Input to output: 4kVAC					
Immunity	-	EN60601-1-2					
Safety Agency Certification	-	UL60601-1, IEC60601-1, CE Mark					
Conducted EMI	-	EN55011 Class B			EN55011 Class A ⁽²⁾		
Switching Frequency	kHz	132kHz					
Weight	g	120			280		
Size (LxWxH)	mm	64 x 46 x 24			89 x 64 x 27		
Mounting & Case	-	PC board mountable. Plastic resin fibreglass case (UL 94V-0)					
MTBF	hrs	200,000 to 400,000 hours, model dependant					
Warranty	yrs	2 years					

Notes:

- (1) For medical applications an equivalent external fuse should be installed in the neutral line
(2) Class I Applications: An external filter can be added to meet EN55011 Class B - see application notes

For full data and drawings please visit
www.emea.tdk-lambda.com/www/km



Model Selector

Model		Output Voltage (V)	Minimum Current (A)	Maximum Current (A)	Power (W)	Output Set Accuracy (%)	Line Regulation (%)	Load Regulation (1) (%)	Cross Regulation (%)	Efficiency (%)	
Single Output											
KMS15-3P3	V1	3.3V	0A	3.00A	9.9W	±2%	0.5%	1%	-	74%	
KMS40-3P3	V1	3.3V	80mA	8.00A	26.4W	±2%	0.5%	1%	-	75%	
KMS15-5	V1	5V	0A	3.00A	15W	±2%	0.5%	1%	-	78%	
KMS40-5	V1	5V	80mA	8.00A	40W	±2%	0.5%	1%	-	79%	
KMS15-9	V1	9V	0A	1.67A	15W	±2%	0.5%	1%	-	79%	
KMS40-9	V1	9V	44mA	4.44A	40W	±2%	0.5%	1%	-	82%	
KMS15-12	V1	12V	0A	1.25A	15W	±2%	0.5%	1%	-	81%	
KMS40-12	V1	12V	33mA	3.33A	40W	±2%	0.5%	1%	-	83%	
KMS15-15	V1	15V	0A	1.00A	15W	±2%	0.5%	1%	-	81%	
KMS40-15	V1	15V	26.7mA	2.67A	40W	±2%	0.5%	1%	-	83%	
KMS15-24	V1	24V	0A	0.62A	15W	±2%	0.5%	1%	-	83%	
KMS40-24	V1	24V	16.7mA	1.67A	40W	±2%	0.5%	1%	-	83%	
Dual Output											
KMD15-55	V1	+5V	150mA	1.5A	15W	±2%	0.5%	1%	5%	78%	
	V2	-5V	150mA	1.5A		±2%		1%	5%		
KMD40-55	V1	+5V	400mA	4A	40W	±2%	0.5%	1%	5%	79%	
	V2	-5V	400mA	4A		±2%		1%	5%		
KMD40-512	V1	5V(2)	1250mA	5A	40W	±3%	0.5%	2%	1%	80%	
	V2	12V(2)	312mA	1.25A		±5%		5.0%	6%		7%
KMD40-524	V1	5V(2)	1250mA	5A	40W	±3%	0.5%	2%	1%	80%	
	V2	24V(2)	156mA	0.625A		±5%		5.0%	6%		7%
KMD15-1212	V1	+12V	62.5mA	0.625A	15W	±2%	0.5%	1%	3%	80%	
	V2	-12V	62.5mA	0.625A		±2%		0.5%	1%		3%
KMD40-1212	V1	+12V	166mA	1.66A	40W	±2%	0.5%	1%	5%	83%	
	V2	-12V	166mA	1.66A		±2%		0.5%	1%		5%
KMD15-1515	V1	+15V	50mA	0.5A	15W	±2%	0.5%	1%	3%	81%	
	V2	-15V	50mA	0.5A		±2%		0.5%	1%		3%
KMD40-1515	V1	+15V	133mA	1.33A	40W	±2%	0.5%	1%	5%	81%	
	V2	-15V	133mA	1.33A		±2%		0.5%	1%		5%
Triple Output											
KMT15-51212	V1	5V(3)	500mA	2A	15W	±2%	0.5%	1%	1%	78%	
	V2	+12V	50mA	0.2A		±3%		2.0%	5%		5%
	V3	-12V	50mA	0.2A		±3%		2.0%	5%		5%
KMT40-51212	V1	5V(3)	1250mA	5A	40W	±3%	0.5%	3%	3%	80%	
	V2	+12V	150mA	0.6A		±5%		5.0%	7%		7%
	V3	-12V	150mA	0.6A		±5%		5.0%	7%		7%
KMT15-51515	V1	5V(3)	500mA	2A	15W	±2%	0.5%	1%	1%	78%	
	V2	+15V	37.5mA	0.15A		±3%		2.0%	5%		5%
	V3	-15V	37.5mA	0.15A		±3%		2.0%	5%		5%
KMT40-51515	V1	5V(3)	1250mA	5A	40W	±3%	0.5%	3%	3%	80%	
	V2	+15V	125mA	0.5A		±5%		5.0%	7%		7%
	V3	-15V	125mA	0.5A		±5%		5.0%	7%		7%

Pinout KM15


PIN #	Single O/P	Function Dual O/P	Triple O/P
1	No Pin	No Pin	No Pin
2	AC (L)	AC (L)	AC (L)
3	AC (N)	AC (N)	AC (N)
4	-DC	-DC	+5V GND
5	No Pin	GND	+5V
6	No Pin	No Pin	-DC
7	+DC	+DC	No Pin
8	No Pin	No Pin	GND
9	No Pin	No Pin	+DC

Pinout KM40


PIN #	Single O/P	Function Dual O/P	5S/12&24S	Triple O/P
1	AC (L)	AC (L)	AC (L)	AC (L)
2	AC (N)	AC (N)	AC (N)	AC (N)
3	+DC	+DC	+O/P2	+DC
4	No Pin	No Pin	+O/P1	+5V
5	-DC	GND	GND1	GND
6	No Pin	No Pin	GND2	+5V GND
7	No Connection	-DC	No Connection	-DC




Outline Drawing KM15 Series

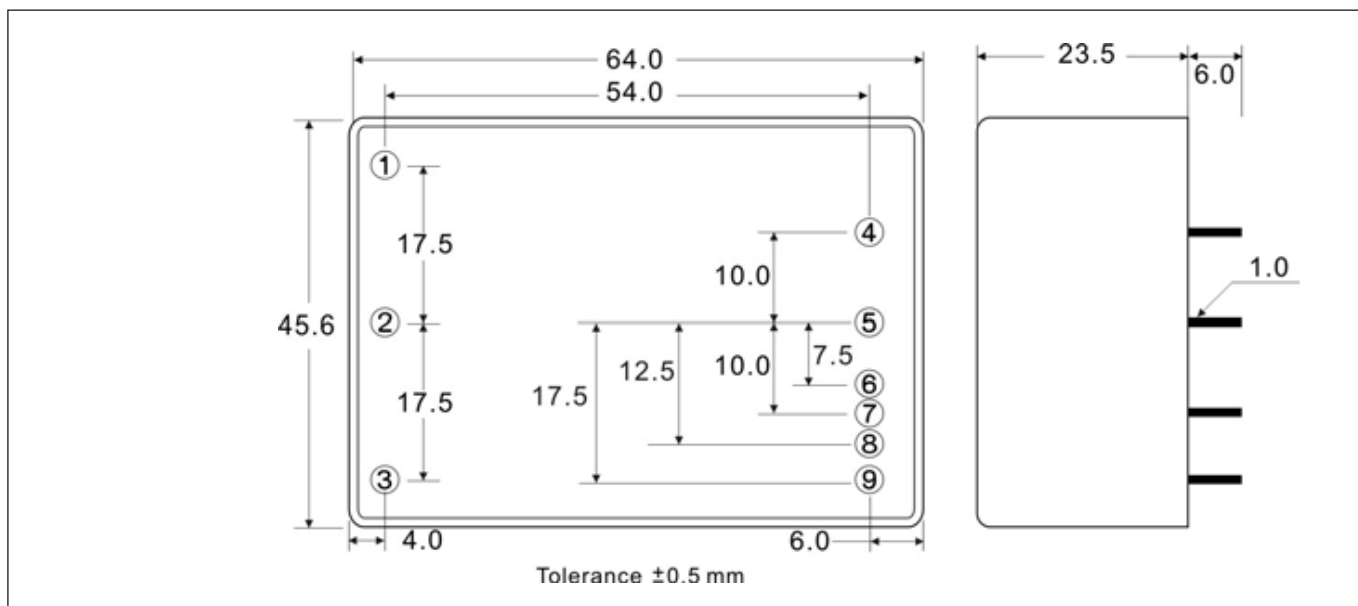


Outline Drawing KM40 Series

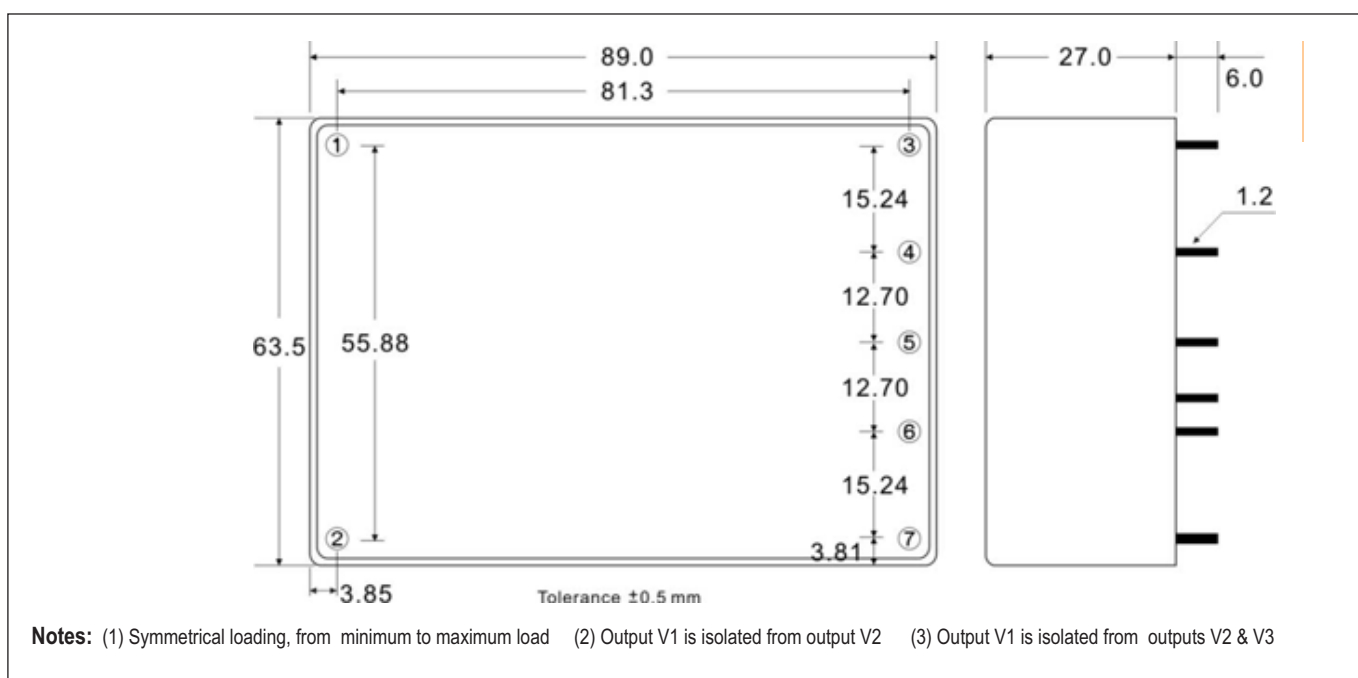

Derating Curves KM15 Series

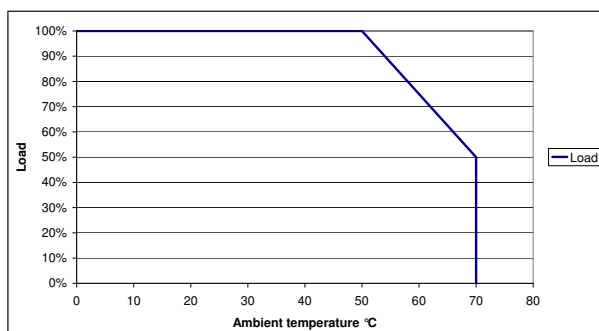

Derating Curves KM40 Series

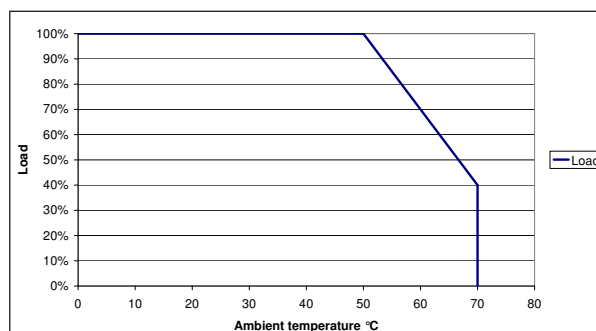



TDK-LAMBDA EMEA

www.emea-tdk-lambda.com



TDK-Lambda France SAS

ZAC des Delaches
BP 1077-Gometz-le-Chatel
91940 LES ULIS
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
www.fr.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.emea.tdk-lambda.com



TDK-Lambda Italy S.r.l.

Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@lambda-europe.com
www.it.tdk-lambda.com



TDK-Lambda Austria Sales Office

Aredstrasse 22
2544 Leobersdorf
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.emea.tdk-lambda.com



TDK-Lambda Scandinavia Sales Office

PO Box 546
Rallarvägen 41
184 40 Åkersberga
Sweden
Tel: +46 854 084 990
Fax: +46 854 066 096
info.germany@de.tdk-lambda.com
www.emea.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
www.uk.tdk-lambda.com



Nemic Lambda Ltd.

Kibbutz Givat
Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
www.nemic.co.il



TDK-Lambda Americas Inc.

Low Power
3055 Del Sol Blvd
San Diego CA 92154
USA
Tel: +1 800-LAMBDA-4 or 1-800-526-2324
Tel: +1 619-575-4400
Fax: +1 619-429-1011
www.us.tdk-lambda.com/lp/



TDK-Lambda Corporation

5F Dempa Bldg. 1-11-15
Higashi-Gotanda
Shinagawa-Ku
Tokyo 141-0022
Japan
Tel: +81 3 3447 4693
Fax: +81 3 3447 4750
www.tdk-lambda.com

High Power
405 Essex Road Neptune NJ 07753
USA
Tel: +1 732 922 9300
Fax: +1 732 922 1441
www.us.tdk-lambda.com/hp/

LOCAL DISTRIBUTION