


P26-Series Pushbutton Switches



The P26-Series pushbutton switches are single pole, AC rated for 8 amps at 125 VAC and suitable for shallow back panel applications. These switches are momentary action with a medium actuation force (13 oz. typical). The P26-Series switch is equipped with a slow-make, slow-break contact mechanism. Typical applications include usage for an Alarm or Warning Device, as well as Test and Measurement Equipment.

Dielectric Strength

UL/CSA: 1000V - live to dead metal parts

Electrical Life


25,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 85°F (0°C to +85°C)

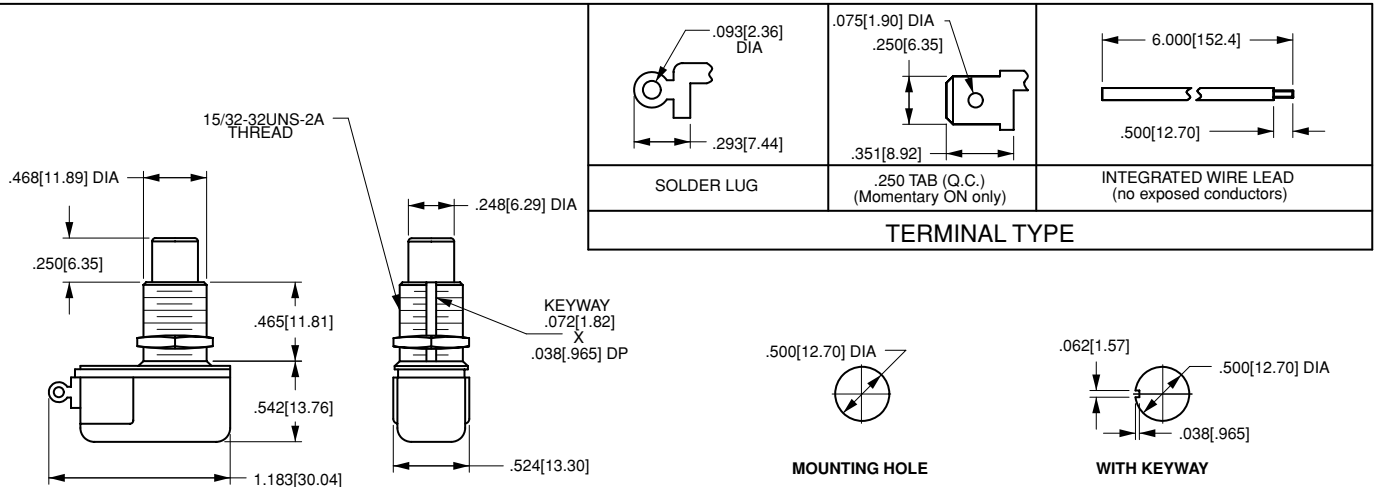

P26L - 1D - BL

¹
Base Part Number

²
Bushing
Style

³
Button
Style/Color

1 BASE PART NUMBER: SERIES/POLES/CIRCUITRY/RATING¹/TERMINATION

Single Pole

3A 250VAC, 6A 125 VAC, 3/4A 125V

OFF - (ON)

ON - (OFF)

3A 277VAC, 6A 125 VAC

OFF - (ON)

ON - (OFF)

solder lug

.250 tab

wire leads

P26A

P26L

P26B

-

P26F

P26T

P267A

P267L

P267B

-

P267F

P267T

2 BUSHING STYLE

	length	diameter
1A	.406	.375
1B	.406	.468
1C	.465	.375
1D	.465	.468

3 BUTTON STYLE/COLOR

BL	black nylon
RD	red nylon
RND MTL ²	round metal
CON MTL ²	concave metal

NOTES

¹ Additional ratings available. Consult factory for details.

² Only available with 1D bushing in .502 length.

() Indicates momentary function.