



PART NO.

VBA112

REVISIONS

ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	A	RELEASED	CHE	28/5/12	SID	28/5/12		11/6/12

Specifications:

Mechanical Characteristics


Mating / Unmating : 500 cycles

Electrical Characteristics

Nominal Impedance : 50 Ω
Frequency Range : 0 - 1 GHz
Operating Voltage : 500 V_{RMS}
Maximum Contact Resistance : 3 m Ω (gold)
Dielectric Withstanding Voltage : 1,500 V_{RMS}
Minimum Insulation Resistance : 5,000 M Ω

Environmental Characteristics

Temperature Range : -50°C to +85°C
Thermal Shock : MIL-STD-1344, method 1033, condition A
Salt Spray : MIL-STD-1344, method 1001, condition B
Physical Shock : MIL-STD-1344, method 2004, condition G
Humidity : MIL-STD-1344, method 1002, procedure B (Type 2)

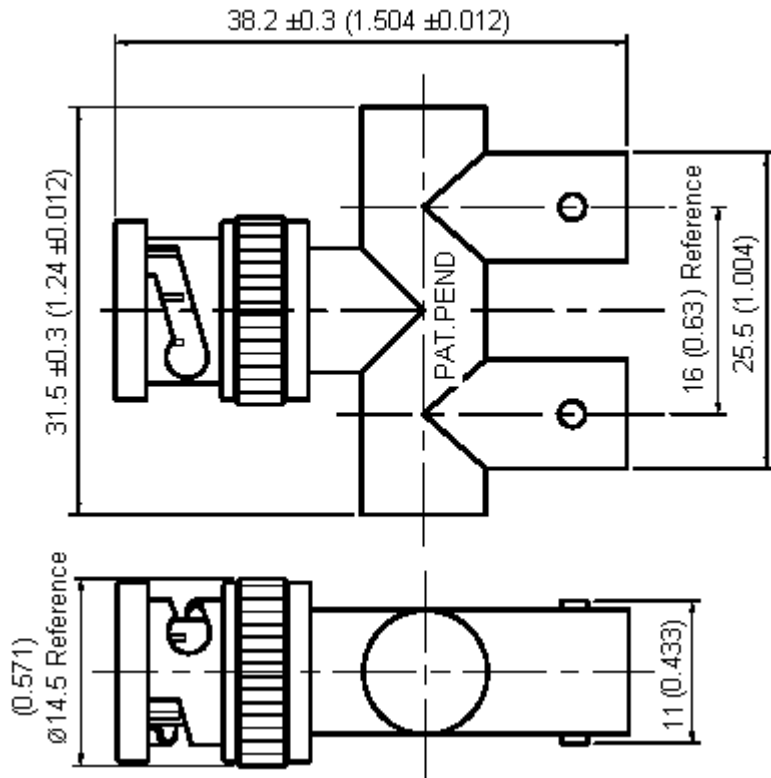

Dimensions : Millimetres (Inches)

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

TOLERANCES:

UNLESS OTHERWISE
SPECIFIED,
DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

DRAWN BY:

CHE

DATE:

28/05/12

CHECKED BY:

DATE:

28/05/12

APPROVED BY:

DATE:

11/06/12

DRAWING TITLE:

BNC Adapter

SIZE
A

DWG NO.

M10000332

ELECTRONIC FILE
23029_DWGREV
A

SCALE: NTS

U.O.M.: mm (Inches)

SHEET: 1 OF 2



PART NO.

VBA112

REVISIONS

ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	A	RELEASED	CHE	28/5/12	SID	28/5/12		11/6/12

Specification Table

Number	Description	Material	Part Number
1	Body	100 µ Inches Minimum Nickel Plating Over Zinc Alloy	VBA112
2	Coupling Nut		
3	Outer Contact	Nickel Plating Over Copper Strip	
4	Male Contact	Gold Plating Over Brass	
5	Female Contact	Gold Plating Over High Strength Copper	
6	Retention Washer	Nickel Plating Over Copper Strip	
7	Insulators	Polypropylene	
8	Spring Washer	Beryllium Copper	
9	Gasket	Silicon Rubber	
10	Spacer	Teflon	

www.element14.com
www.farnell.com
www.newark.com

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

TOLERANCES:

UNLESS OTHERWISE
SPECIFIED,
DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

DRAWN BY:

CHE

CHECKED BY:

SID

APPROVED BY:

DATE:

28/05/12

DATE:

28/05/12

DATE:

11/06/12

DRAWING TITLE:

BNC AdapterSIZE
A

DWG NO.

M10000332ELECTRONIC FILE
23029_DWGREV
A

SCALE: NTS

U.O.M.: mm (Inches)

SHEET: 2 OF 2