



Male Horizontal PC Tail

- ❑ Mates with female connectors shown on pages 38, 39, 41, 42, 44 and 46 to 50 (excluding 101Lok).
- ❑ Jackscrews are assembled where specified.
- ❑ Choice of PC tail length.
- ❑ Board Mount provides PCB strain relief.

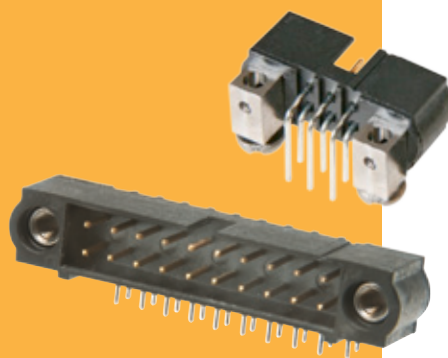


WITHOUT JACKSCREWS

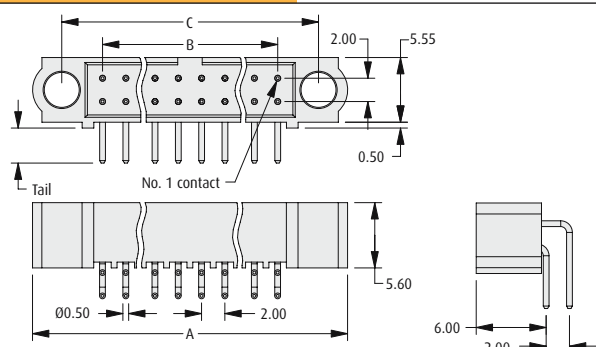


CALCULATION


A	$B + 12$
B	Total no. of contacts - 2
C	$B + 7$

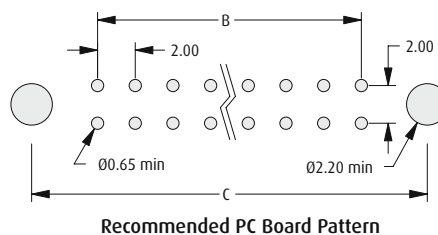

WITH JACKSCREWS

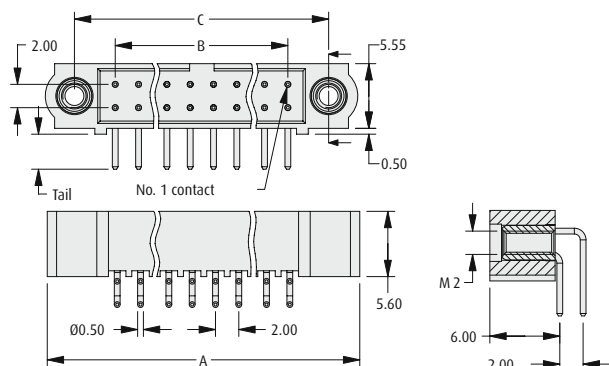

WITH BOARD MOUNT

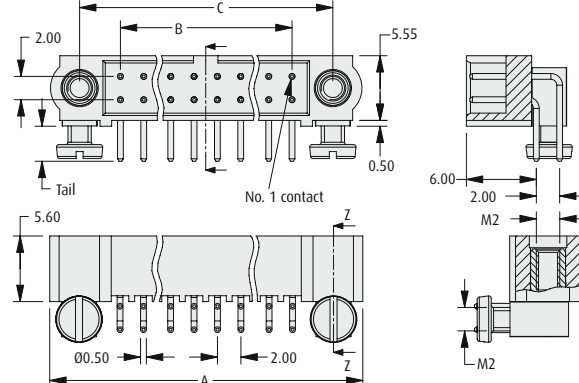

HOW TO ORDER

M80 - 5 X X XX XX

SERIES CODE

3	With Jackscrews
4	With Board Mount
5	Without Jackscrews
0	3mm Tails
1	4.5mm Tails

FINISH

05	Gold	
22	Gold + Tin/Lead	
42	Gold + Tin	

TOTAL NO. OF CONTACTS

04 to 50

Even numbers only

All dimensions in mm.