

## Ionizer Mounting Arm Installation and Maintenance



Made in the  
United States of America

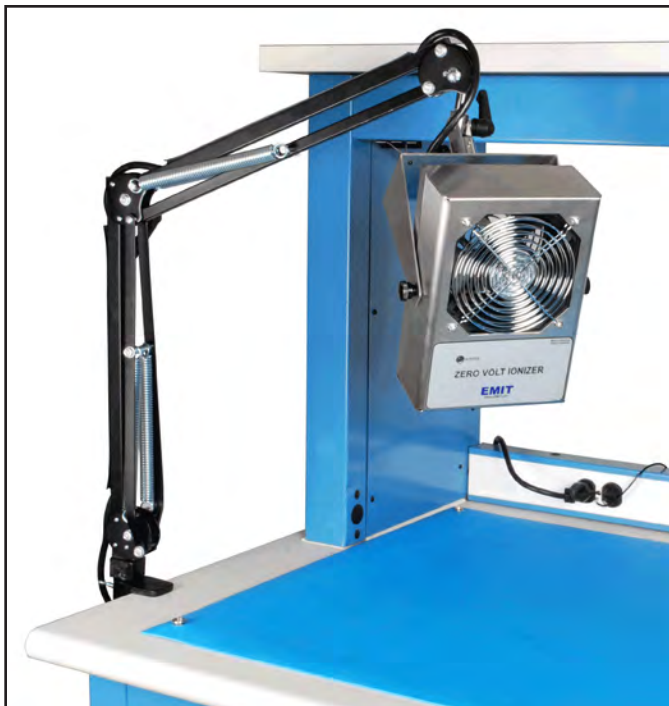


Figure 1. EMIT 50604 Ionizer Mounting Arm

### Packaging

- 1 Ionizer Mounting Arm with C-Clamp
- 4 Screws
- 4 Nuts

### Installation

Mount the arm at the desired location of the workbench using the C-Clamp mounting system. Figure 2 shows the proper mounting of the arm on a workbench. Tighten the C-Clamp securely.

The neck piece on the Arm allows for easy mounting of an EMIT Zero Volt Bench Top Ionizer or Chargebuster Jr. Ionizer via its stand assembly. The ionizer should be mounted to the Mounting Arm using the 4 included screws and nuts. See Figure 3.



Figure 2. Installing the Ionizer Mounting Arm to a workbench

### Description

The EMIT 50604 Ionizer Mounting Arm is designed as a mounting alternative for the Zero Volt Bench Top Ionizer and Chargebuster Jr. Ionizer. The arm allows the ionizer to be mounted off the worksurface, saving valuable work space. The articulated movement of the arm assembly allows the user to focus the ionizer's output directly onto the desired areas. The Ionizer Mounting Arm includes a C-Clamp style mounting system for ease of installation.

The 50604 Ionizer Mounting Arm is compatible with the following EMIT items:

| Item  | Description                                    |
|-------|------------------------------------------------|
| 50611 | Chargebuster Jr. Ionizer, 120VAC               |
| 50612 | Chargebuster Jr. Ionizer, with Heater, 120VAC  |
| 50663 | Bench Top Zero Volt Ionizer, 120VAC, Stainless |
| 50670 | Bench Top Zero Volt Ionizer, 220VAC, Stainless |
| 50690 | Bench Top Zero Volt Ionizer, 120VAC, Aluminum  |

NOTE: The 50604 Ionizer Mounting Arm is not compatible with ionizers built prior to 2011. The drill pattern can be found on page 2. Contact customer service for more information.

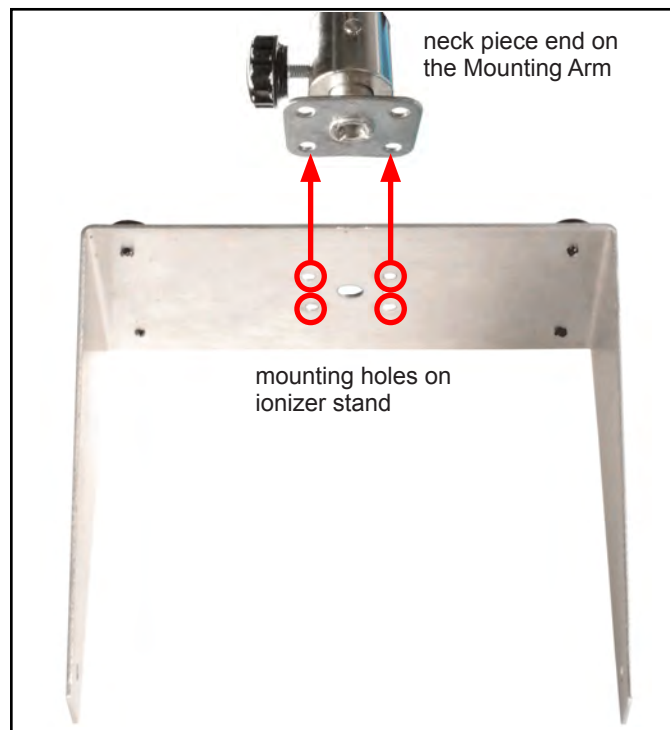


Figure 3. Installing the ionizer's stand to the Ionizer Mounting Arm

## Specifications

|                          |                    |
|--------------------------|--------------------|
| Construction:            | Metal with springs |
| Weight:                  | 4.8 lbs            |
| Maximum Extension:       | 38"                |
| Maximum Weight Capacity: | 8 lbs              |

### Limited Warranty, Warranty Exclusions, Limit of Liability and RMA Request Instructions

See EMIT's Warranty -

<http://emit.descoindustries.com/Warranty.aspx>

## Drill Pattern Templates

| Ionizer | Link                              |
|---------|-----------------------------------|
| 50611   | <a href="#">Download Template</a> |
| 50612   | <a href="#">Download Template</a> |
| 50663   | <a href="#">Download Template</a> |
| 50670   | <a href="#">Download Template</a> |
| 50690   | <a href="#">Download Template</a> |

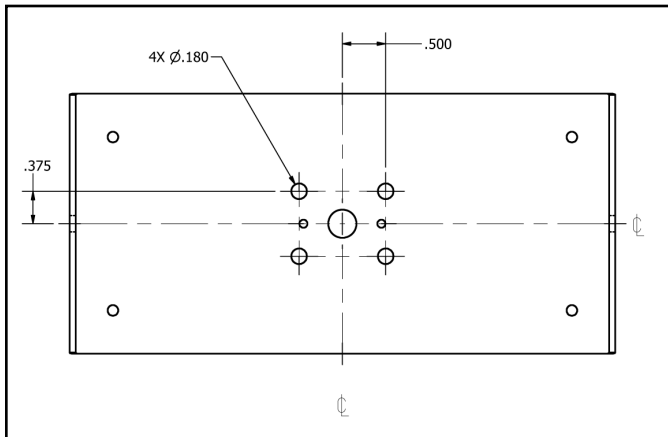


Figure 4. Drill pattern for 50604 Ionizer Mounting Arm