

Board to Board Connectors

1.25mm AF (Alignment Free) B to B Connectors

Receptacle Assembly

(Used for both top and bottom-entry types)

Mating Tab Assembly

Part Number :


□-917361-□ (Top)

□-917362-□ (Bottom)

Material and finish :

Housing—Glass filled 66 nylon

Contact—Phosphor bronze, tin plated to more than 0.8μm

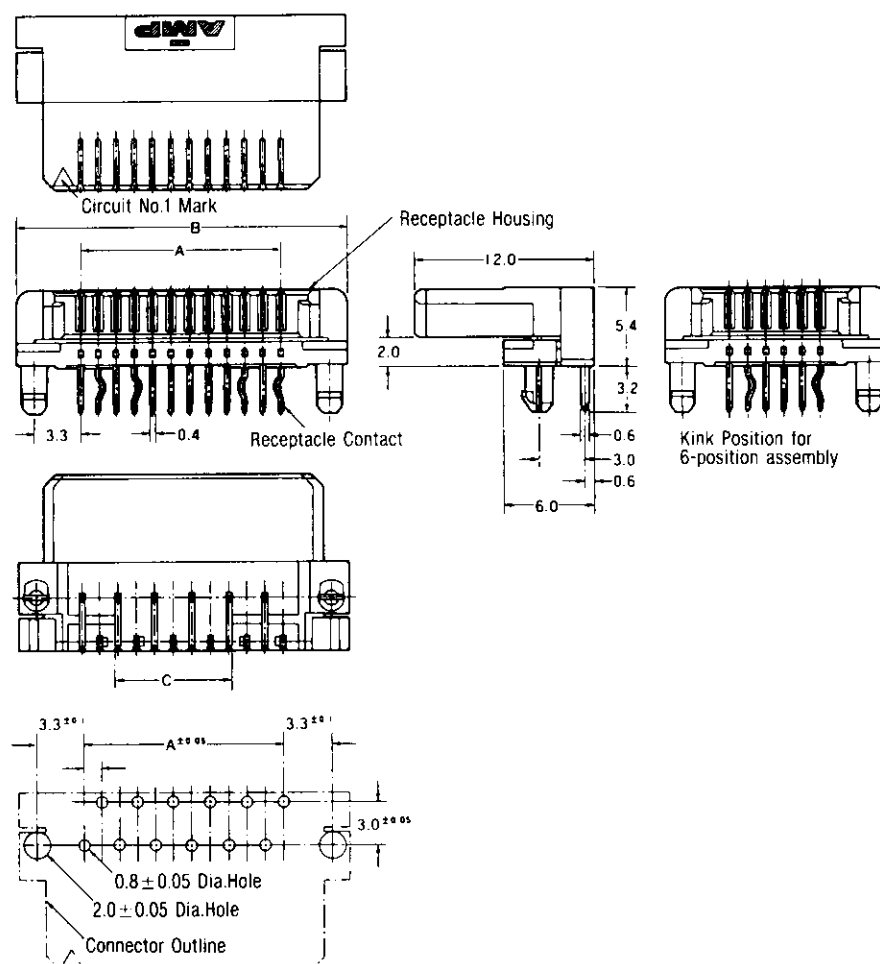

PC Board Layout (Recommended PC Board thickness : 1.6mm)

No. of Pos.	Dimensions			Part No. of Receptacle Assembly Tray(ea.)
	A	B	C	
6	6.25	15.3	5.42	917360-6 (348)
8	8.75	17.8	7.92	917360-8 (288)
10	11.25	20.3	7.92	1-917360-0 (264)
12	13.75	22.8	7.92	1-917360-2 (228)
14	16.25	25.3	7.92	1-917360-4 (204)
16	18.75	27.8	7.92	1-917360-6 (192)
18	21.25	30.3	7.92	1-917360-8 (168)
20	23.75	32.8	7.92	2-917360-0 (156)
22	26.25	35.3	7.92	2-917360-2 (144)
26	31.25	40.3	7.92	2-917360-6 (132)
28	33.75	42.8	7.92	2-917360-8 (120)
30	36.25	45.3	7.92	3-917360-0 (108)