

# Base Mount Double Row Terminal Blocks

## Series KU

### Specifications

**Description:** Base mount double row terminal blocks.

### Ratings:

Volts: — 600V

Amps: — 60A\*

**Center Spacing:** 0.625" (15.88mm)

**Number of Poles:** 2- to 12-poles

**Wire Range:** #6-22 AWG Cu

**Screw Size:** #10-32

**Torque Rating:** 20 lb-in.

**Distance Between Barriers:** 0.437" (11.09mm)

**Mounting:** Base mount

**Material:** Molded base: Black, UL rated 94V1 Nuclear Grade Noryl

Terminal plating: Nickel over brass

**Operating Temperature:** 105°C max.


**Agency Information:** UL File E62622, CSA File 47235

\* 60A rating achieved with #6 copper wire crimped to ring terminal.


### Dimensions - in

| Poles | KU   |      | KUX Only |
|-------|------|------|----------|
|       | A    | B    | A        |
| 02    | 2.50 | 1.62 | 2.00     |
| 03    | 3.12 | 2.25 | 2.62     |
| 04    | 3.75 | 2.87 | 3.25     |
| 05    | 4.37 | 3.50 | 3.87     |
| 06    | 5.00 | 4.12 | 4.50     |
| 07    | 5.62 | 4.75 | 5.12     |
| 08    | 6.25 | 5.37 | 5.75     |
| 09    | 6.87 | 6.00 | 6.37     |
| 10    | 7.50 | 6.62 | 7.00     |
| 11    | 8.12 | 7.25 | 7.62     |
| 12    | 8.75 | 7.87 | 8.25     |

1" = 25.4mm.

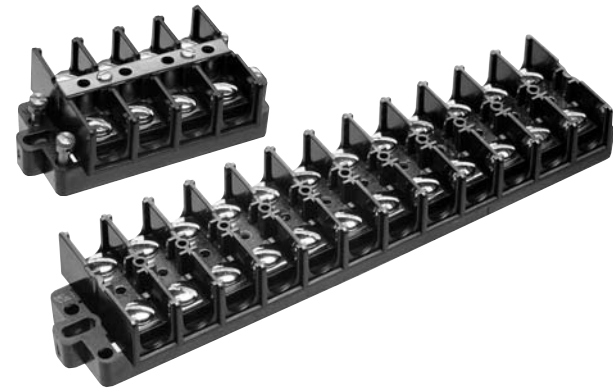

Series KU - in (mm)

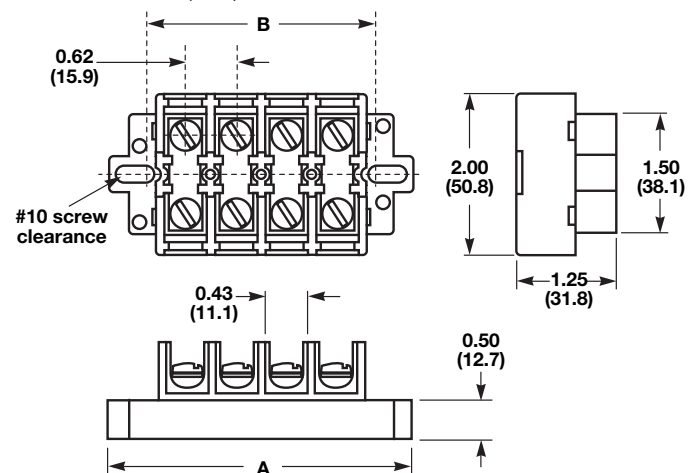

### Catalog Number Build-A-Code

| Series                                                                                                                                                                                                                                                              | Poles                                                                                                             | Screw Options                                                                                                                                                                              | Covers                                                                             | Marking Strip                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/><br>KU = Standard block<br>KUH = Block<br>KUX = Short block<br>KURL = Standard w/removable link<br>KUXRL = Short block w/removable link | <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> <input type="checkbox"/><br>02 to 12 | 00 = Screws shipped bulk<br>W = Brass washer head, nickel-plated<br>P = Steel screw w/pressure plate zinc-plated<br>B = Brass washer head, no plating<br>BP = Brass phislot, nickel-plated | <input type="checkbox"/> <input type="checkbox"/><br>WC = Top cover & 2 end plates | <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/><br>MT = Matte finish<br>NU = Numbered 1 to 12, horizontal<br>NUV = Numbered 1 to 12, vertical<br>PT = Marker strip for cover |

### Catalog Number - SC Series

KUSC = Standard w/shorting strap & 4 shorting screws  
 KUXSC = Short block w/shorting strap & 4 Shorting screws

02 to 12 00 = Screws shipped bulk  
 W = Brass washer head, nickel-plated  
 P = Steel screw w/pressure plate zinc-plated  
 B = Brass washer head, no plating  
 BP = Brass phislot, nickel-plated

WC = Top cover & 2 end plates


PT\* = Marker strip for cover

\*Requires WC cover option


### Accessories



MTMU#  
Molded Marking Tape  
Matte Finish




NUM##  
Molded Marking Tape



JU12  
Jumper  
12 Circuits



NUE  
End Piece for NUC



NUC##  
Cover

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eaton:](#)

[JU12](#) [KUSC6BPWCPT](#) [KU6B](#) [KUX4-W](#) [KUXSC6-WC](#) [KU2](#) [KU8-NLMT](#) [KUSC4](#) [KUSC6-WCPT](#) [KUXSC4-W](#)  
[KUXSC8](#) [KUX4](#) [KU3](#) [KUSC2](#) [KUSC2-WC](#) [KUX8](#) [KU6](#) [KUX6](#) [KUSC6](#) [KUSC8-WC](#) [KUXSC4](#) [KUX12-MT](#) [KUX4-](#)  
[MT](#) [KUX4-WMT](#) [KUSC6-W](#) [KUXSC6](#) [NUM12](#) [KUSC8](#) [KUXRL4](#) [KUXSC6-W](#) [KU12-WC-MT](#) [NUE](#) [NUC4](#) [KUXRL2-](#)  
[BP](#) [KUSC4-PWC](#) [KUXSC6-PWC](#) [KUX-03P](#) [KURL4-BP](#) [KU4-MT](#) [KUX-12P](#) [KUX12-W](#) [KU12A](#) [KUX8-WNUV](#)  
[KUXSC6-B](#) [KU6-NLMT](#) [KU8-WMT](#) [KUTH](#) [KUXSC4-00](#) [KU12-NLMT](#) [KUSC8-W](#) [KU8](#) [KU06-WC-MT](#) [KU4](#)  
[KUXSC4-GE](#) [KU12-MT](#) [KU10-WC-MT](#) [KU12C](#) [KUSC4-WCNL](#) [KUSC6-00W](#) [KURL8](#) [KUX12-WC](#) [KUSC4-W](#)  
[KUX12-00](#) [KU12B](#) [KUX8-W](#) [KU6C](#) [KUXSC4-WPT](#) [KUXRL2](#) [KUXRL6-BP](#) [KU4-BPWCMT](#) [KUXSC8-BPWC](#)  
[KUX8-MT](#) [KU10WWC](#) [KURL12-BP](#) [KU6-WC](#) [KU8-MT](#) [KU12-WNUV](#) [KUXSC6-00](#) [KU4-WMT](#) [KU12-WC](#) [KU6A](#)  
[KUX6-MT](#) [KUSC6-WC](#) [KUX-06P](#) [KUXSC6-WPT](#) [KUX6-W](#) [KU12-WMT](#) [KU6-BPWCMT](#) [KUX8-BP](#) [KUXSC8-WPT](#)  
[KUX8-WMT](#) [KUXRL4-BP](#) [KUX12-BP](#) [KUSC4-WC](#) [KUX6-00](#) [KUX6-WMT](#) [KU10-WCNU](#) [KUX6-WNUV](#) [KUX12-](#)  
[WNUV](#) [KUX12-NUV](#)