




Models 3500 Panel Mount/Wirewound Potentiometers



*Using ohm chart below, replace "XX" in Stock No. with number that corresponds with desired ohm value.

Model 3400 Panel Mount/Wirewound Element Potentiometers

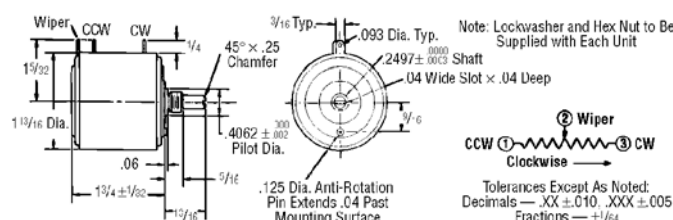


10 turn, 5 watt — 1¹³/₁₆" dia. **Operating Temperature:** -65°C to +125°C. **Power Rating:** 5 watts @ 40°C. **Resistance Tolerance:** ±3%. **End Voltage:** 15% max. sealable; ext. temp. range; high stop strength; excellent wiper stability; high power precision potentiometer.

*Using ohm chart below, replace "XX" in Stock No. with number that corresponds with desired ohm value.

Ohms	XX	Ohms	XX	Ohms	XX
1K	04	5K	12	10K	06


Models 3540 and 3541 Panel Mount/Wirewound and Hybritron Element Potentiometers



†1 K, 5 K and 10 K only. *Using ohm chart below, replace "XX" in Stock No. with number that corresponds with desired ohm value.

Ohms	XX	Ohms	XX	Ohms	XX	Ohms	XX
100	50	1K	53	10K	56	100K	58
200	51	2K	54	20K	57	—	—
500	52	5K	55	50K	59	—	—

Model 3590 Panel Mount/Wirewound Element Potentiometers

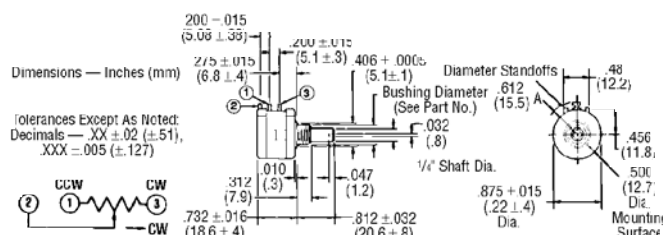

10 turn, 2 watt — 7/8" dia. Bushing mount, wirewound element. The -1 and -2 units are not sealed. **Operating Temperature:** -55°C to +125°C. **Resistance Tolerance:** ±5%. **Power Rating:** 2 watts @ 40°C. 2000 VAC dielectric withstanding voltage @ sea level. **Temperature Coefficient:** ±50 ppm/°C.

*Using ohm chart below, replace "XX" in Stock No. with number that corresponds with desired ohm value. 50 K and 100 K pricing higher. PC pin terminals available. Call for pricing and minimums. †2K and 20K not stocked. †1K, 20K and 50K not stocked.

Ohms	XX	Ohms	XX	Ohms	XX	Ohms	XX
1K	01	5K	03	20K	05	100K	07
2K	02	10K	04	50K	06	—	—