

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BZ-2RW881T

BZ-2RW881T

PAGE 1 OF 1

RELEASE NO. PR-5256 REPLACES

M

DRAWING
NUMBER

ISSUE

REVISIONS

A	CO-69351-D	JWB	16 JUL 91
B	CO-77589	TSM	29 MAR 94
C	CO93346	DLT	14 SEP 98

CHECK

CHECK

6 JAN 76


DRAW

CHECK

GLH 31 DEC 75

FORMTEK

FO-52848-A

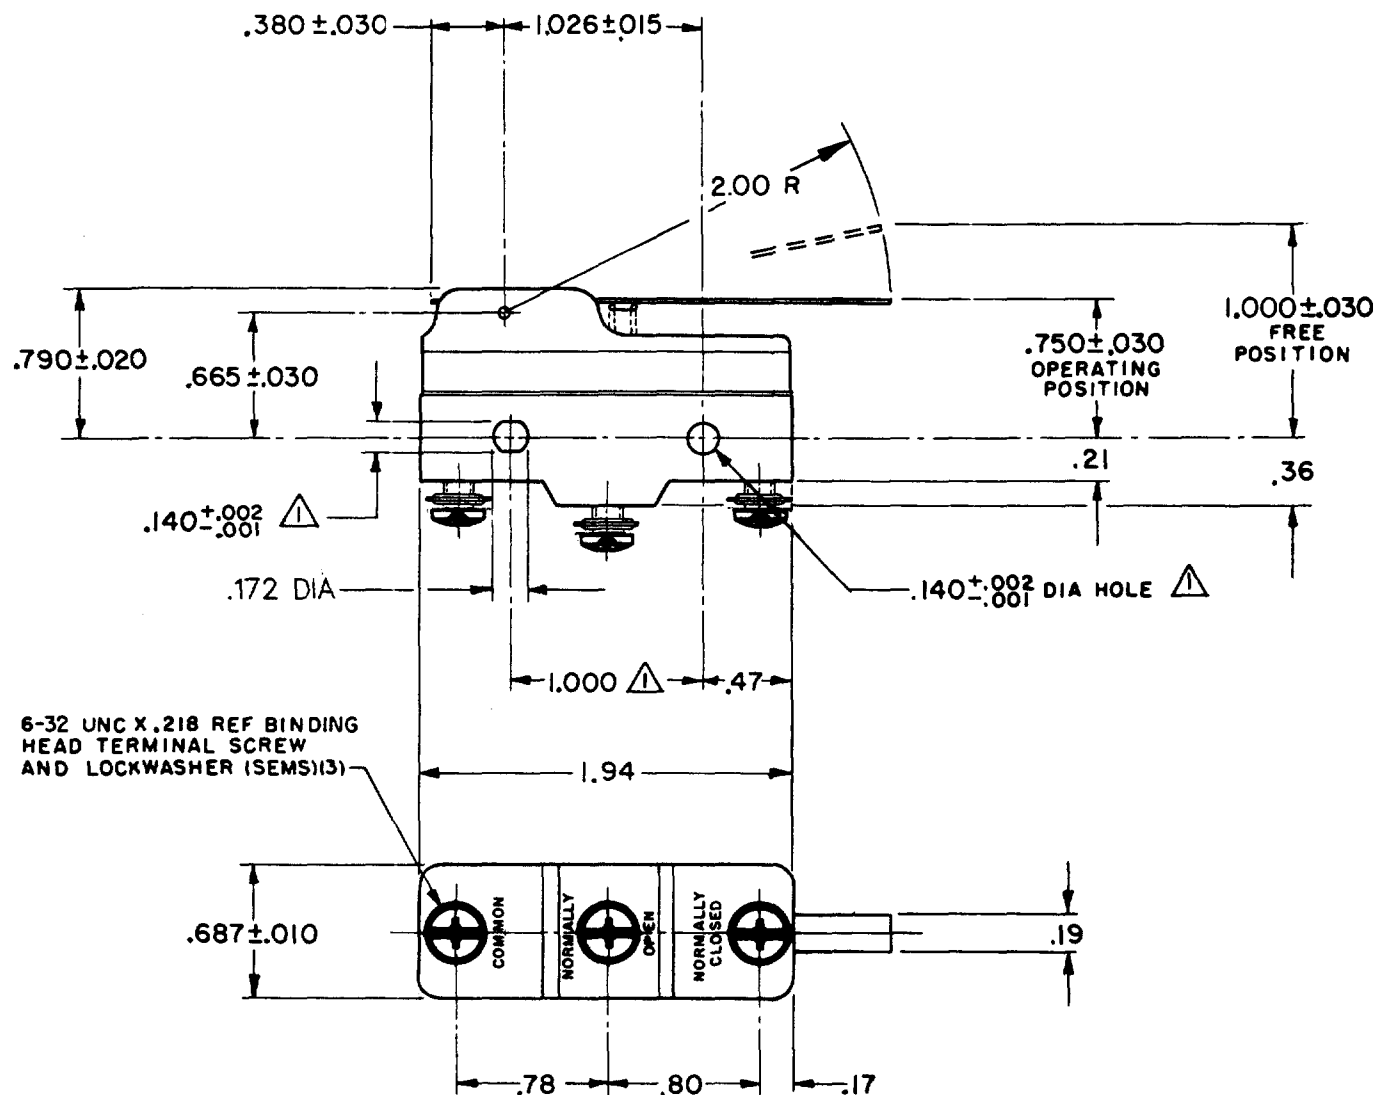


NOTE

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ——— 3 1/2 OZ MAX
RELEASE FORCE ——— 1/2 OZ MIN
DIFFERENTIAL TRAVEL ——— .005—.040
OVERTRAVEL ——— .172 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED — FILE E12252
CODE L96 15A-125, 250 OR 480 VAC
1/8HP-125 VAC; 1/4HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC

L288
L299
L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04	X
ONE PLACE	X,X	0.4/.016	X,X
TWO PLACES	X,XX	0.15/.006	X,XX
THREE PLACES	X,XXX	0.13/.005	X,XXX

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

WEIGHT .073 LB

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[BZ-2RW881T](#)