


AE-B56-SP1

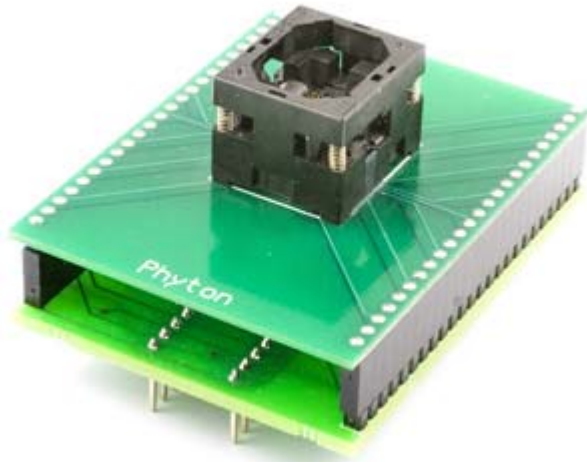

DIP40/BGA64 specialized adapter for FLASH memory.
Device package dimensions: 9.0 x 7.0 x 1.2 mm, 0.8 mm pitch

Click the programmer model below to get an appropriate list of the devices supported by the adapter:

- [ChipProg+](#)
- [ChipProg-40](#)
- [ChipProg-48, ChipProg-G4](#)

Adapter Connection Table:

DIP-40	BGA-64	U1, 74HC573	U2, 74HC573	C1, 150pF	C2, 0.1uF
1					
2					
3		11	11	1	
4	B4				
5					
6					
7	A5				
8	C4				
9	A4				
10	A2				
11	B2				
12	C2				
13	D2				
14	B1				
15	C1				
16	D1				
17	E1				
18					
19					

20	E2,G8	1, 10	1, 10	2	2
21	F1				
22	F2				
23	G2	2			
24	H2		2		
25	E3	3			
26	F3		3		
27	H3	4			
28	G3		4		
29	F4	5			
30	H4		5		
31	F5	6			
32	G6		6		
33	H6	7			
34	F6		7		
35	E6	8			
36	H7		8		
37	G7	9			
38	F7		9		
39					
40	G5,G4,G1	20	20		1
			12		
	D8		13		
	B8	12			
	D7	13			
	C7	14			
	B7	15			
	A7	16			
	D6	17			
	C6	18			
	A6	19			
	B6		16		
	C5		15		
	C8		14		
	C3		17		
	D3		18		
	E8		19		