






DBEE/U 104 Multipole Receptacles

Contact polarity A

Contact polarity Z





Solder (-x30/-x40)



PCB (-x39/-x49)

All dimensions see note 1)

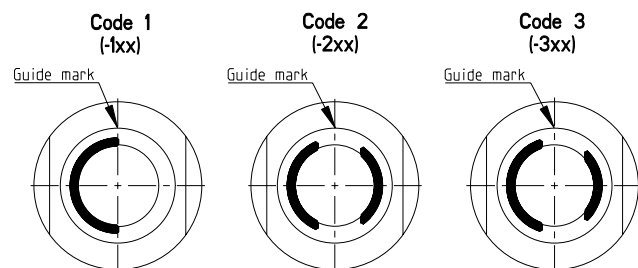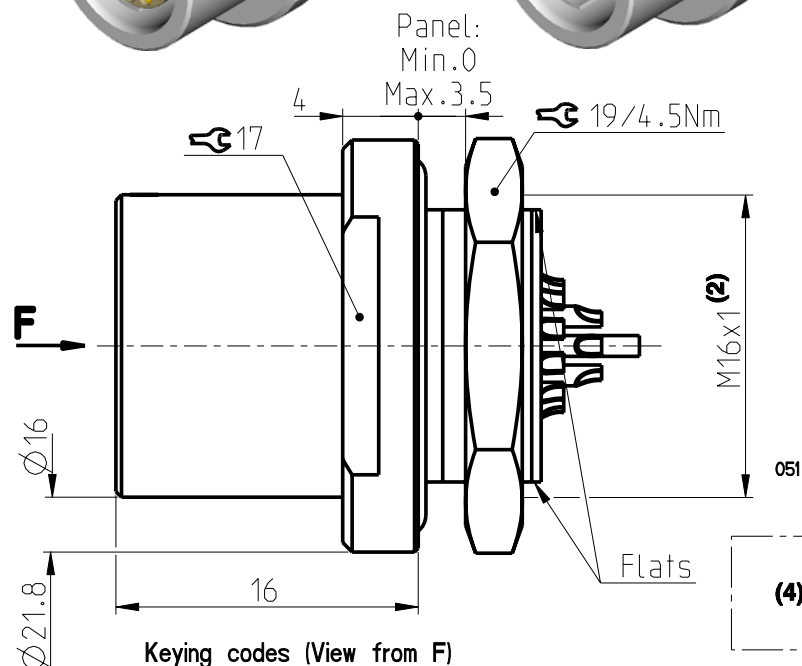


CONTACT CONFIGURATION	Contacts	Solder cup ϕ	C	PIN ϕ
104 A 051	2	1.86	-	-
104 A 040	3	1.86	-	-
104 A 037	4	1.18	-	-
104 A 087	4	0.79/2.48	-	-
104 A 053	5	1.18	-	-

Pin layout / PCB hole pattern for polarity A - View from F ⁽³⁾

040 037 087 053



Polarity Z - View from F



All dimensions in mm

600540

Rev.

1

Pages

1/3

Notes :

- 1) All tolerances resulting from connector assembly are typically ± 0.3 mm
- 2) If receptacle is screwed directly into threaded hole, oversize thread by $+0.05$ mm

3) Recommended PCB hole dimensions may be adjusted to application

4) Please contact us

Part number example : DBEE 104 A092-130







www.fischerconnectors.com

Information provided herein is believed to be accurate at time of publishing. Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.


DBEE/U 104 Multipole Receptacles

Contact polarity A


Contact polarity Z




Solder (-x30/-x40)



PCB (-x39/-x49)

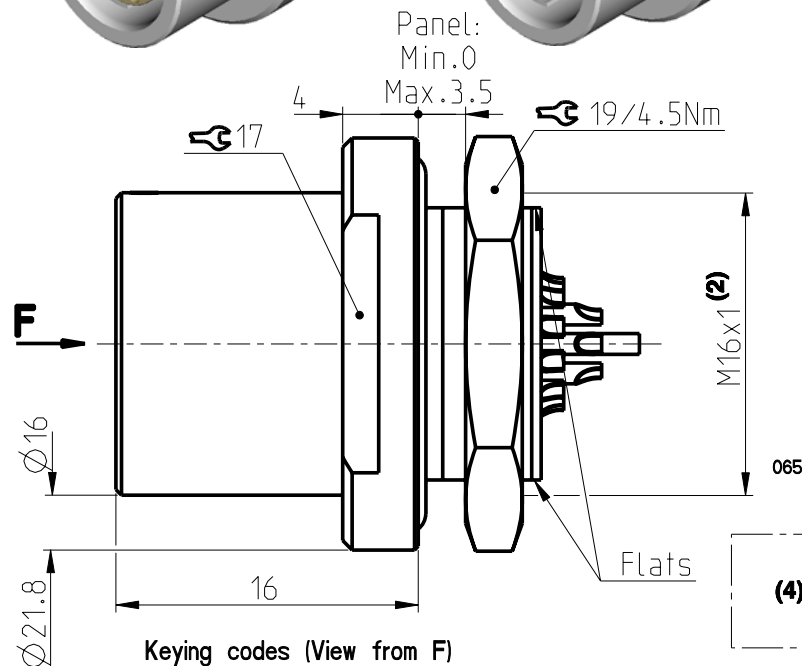


Keying codes (View from F)

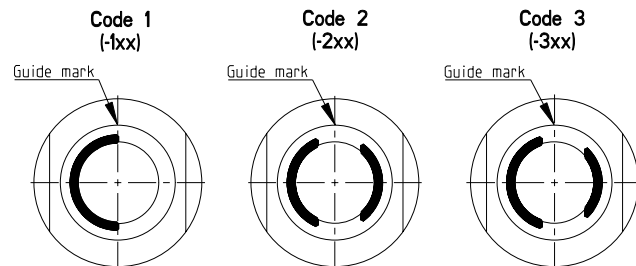


CONTACT CONFIGURATION	Contacts	Solder cup Ø	C	PIN Ø
104 A Z 065	6	0.79	-	-
104 A Z 054	7	0.79	-	-
104 A Z 066	8	0.79	-	-
104 A Z 055	9	0.79/1.18	7.2	0.50
104 A Z 056	11	0.79	7.2	0.50

Pin layout / PCB hole pattern for polarity A - View from F (3)


054




066



055



056

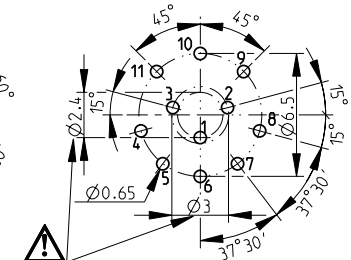

Polarity Z - View from F

(4)

(4)

(4)

(4)

(4)

All dimensions in mm

600540

Rev.

1

Pages

2/3

Notes :

- 1) All tolerances resulting from connector assembly are typically $\pm 0.3\text{mm}$
- 2) If receptacle is screwed directly into threaded hole, oversize thread by $+0.05\text{mm}$

3) Recommended PCB hole dimensions may be adjusted to application

4) Please contact us

Part number example : DBEE 104 A092-130





fischer

www.fischerconnectors.com


DBEE/U 104 Multipole Receptacles

Contact polarity A

Contact polarity Z




Solder (-x30/-x40)




PCB (-x39/-x49)

All dimensions see note 1)

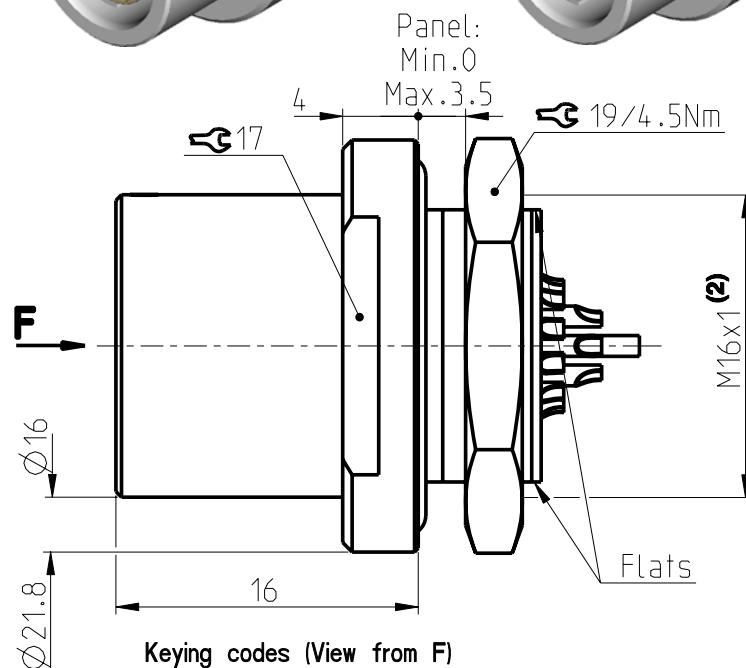

Keying codes (View from F)

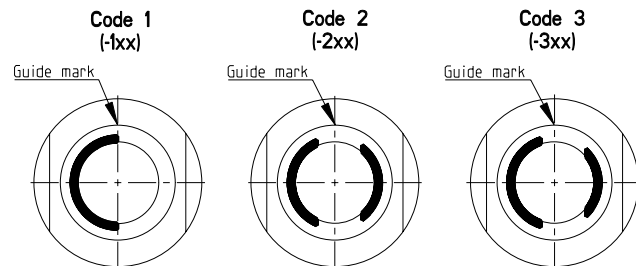


CONTACT CONFIGURATION	Contacts	Solder cup ϕ	C	PIN ϕ
104 A Z 086	16	0.79	-	-
104 A Z 092	19	0.79	7.2	0.50
*104 A 124	27	-	-	-


*Please contact us for additional information

Pin layout / PCB hole pattern for polarity A - View from F (3)


086






092



124



Polarity Z - View from F



All dimensions in mm

600540

Rev.

1

Pages

3/3

Notes :

- 1) All tolerances resulting from connector assembly are typically ± 0.3 mm
- 2) If receptacle is screwed directly into threaded hole, oversize thread by $+0.05$ mm

3) Recommended PCB hole dimensions may be adjusted to application

4) Please contact us

Part number example : DBEE 104 A092-130

fischer

www.fischerconnectors.com

Information provided herein is believed to be accurate at time of publishing. Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.