

FO-55118-B 10


HONEYWELL
PART NUMBER

BZ-R1692

PRODUCT CODE

AGF8826

REV	DOCUMENT	CHANGED BY	CHECK
B	0087958	SBH 30MAR12	CMH

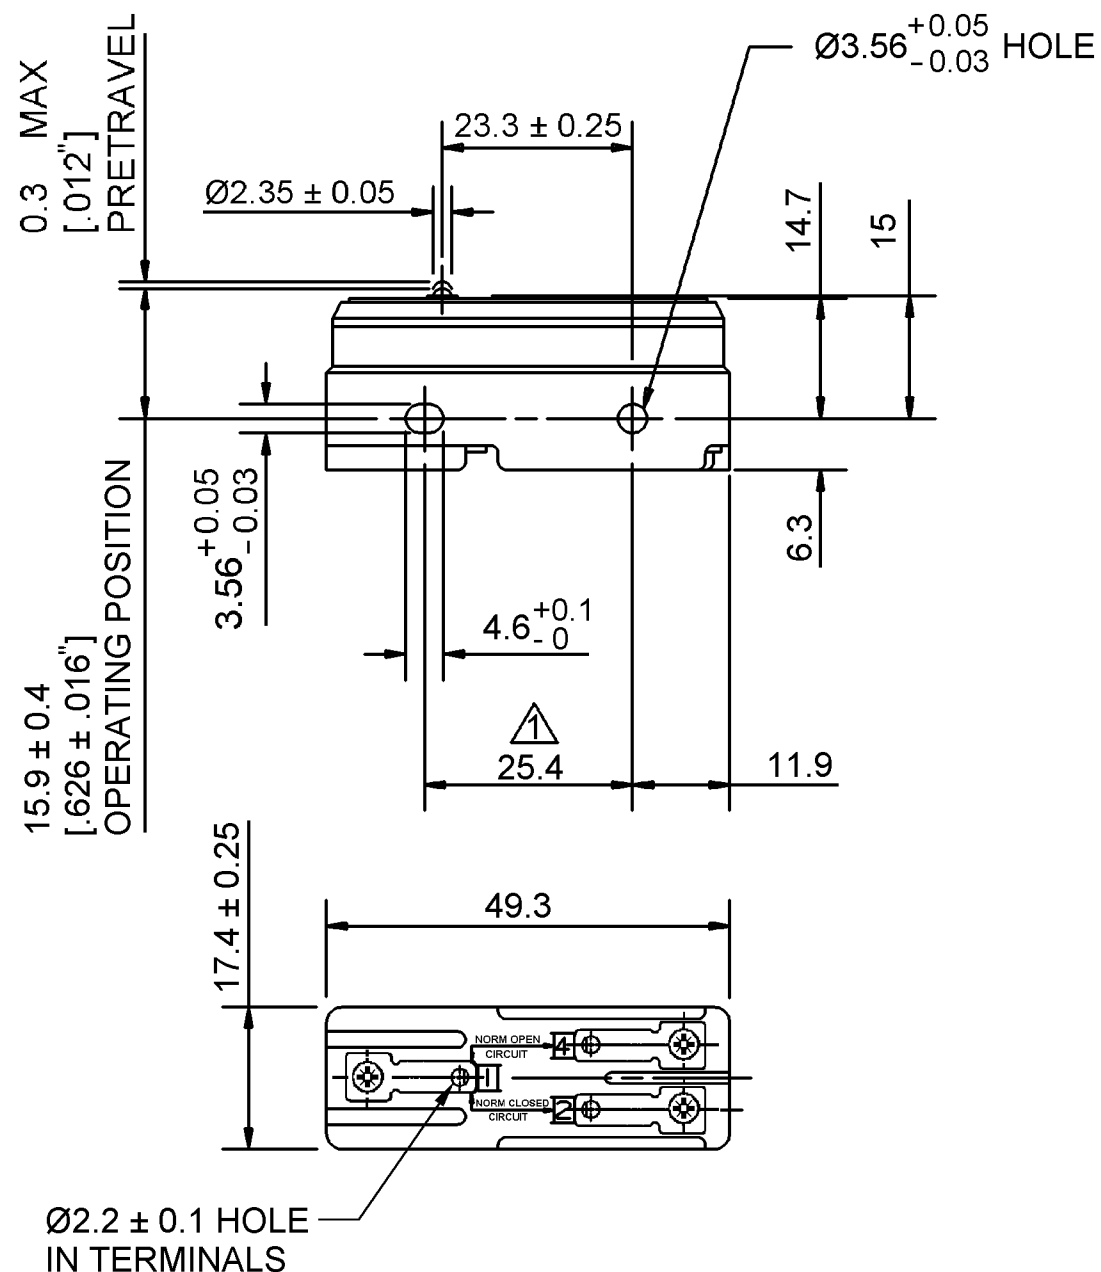

NOTES:

① - MOUNTING HOLES WILL ACCEPT Ø3.5 MAX PINS
OR SCREWS ON 25.4±0.4 CENTRES.

REPLACES: NEWHOUSE BZ-R169

CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE	200 - 260g	CONTACT ARRANGEMENT	BREAK DISTANCE
DIFFERENTIAL FORCE		S.P.D.T	
RELEASE FORCE	110g MIN		
FREE POSITION			
PRETRAVEL			
DIFFERENTIAL TRAVEL	0.008 - 0.014 [0.00032 - 0.00055"]		
OVERTRAVEL	0.13 / [0.005"] MIN		
FULL TRAVEL FORCE			



15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
16A/250 V~T85 5E4 µ



DESIGN UNITS: MM
TOLERANCES UNLESS NOTED:

NO PLACES X ± -
ONE PLACE .X ± 0.4
TWO PLACE .XX ± -
THREE PLACE .XXX ± -
ANGLES X ± -

THIRD ANGLE PROJECTION



DRAWN SSK 10NOV09
CHECK GM 10NOV09

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ASME Y14.5M-1994
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell				
TITLE				
SWITCH - BASIC				
SIZE	TYPE	CAGE CODE	DRAWING NAME	REV
A3	I	-	BZ-R1692	B
SCALE	NONE		SHEET	1 OF 1