

T3/DS3/E3/STS-1 TRANSFORMERS

Dual SMT, Extended Temperature Range



- Dual SMT package contains both transmit and receive transformers
- Operating temperature of -40°C to +85°C
- Models matched to leading transceiver ICs
- Return loss meets requirements of G.703
- 1500 Vrms isolation per UL1459 and UL1950

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C


Part Number	Turns Ratio (±2%)		OCL Primary @ 25°C (μH MIN)		L _L (μH MAX)		C _{ww} (pF MAX)		Isolation Voltage (Vrms MIN)	Package/ Schematic	Primary Pins	
	TX	RX	TX	RX	TX	RX	TX	RX			TX	RX
T3020	1:2CT	1:1	40	100	.120	.120	10	10	1500	BH/1	16-14	6-8
T3021	1:2CT	1:2CT	40	40	.100	.100	10	10	1500	BH/4	16-14	11-9
T3023	1:1	1:1	40	40	.110	.110	10	10	1500	BH/5	1-2	7-8
TX3025	1CT:1CT	1:1	100	100	.120	.120	10	10	1500	BH/2	6-8	16-15
TX3026	1:2CT	1:1	100	100	.120	.120	10	10	1500	BH/3	7-8	16-15

NOTE: Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (ex: T3020T).

Mechanicals


Schematics

BH

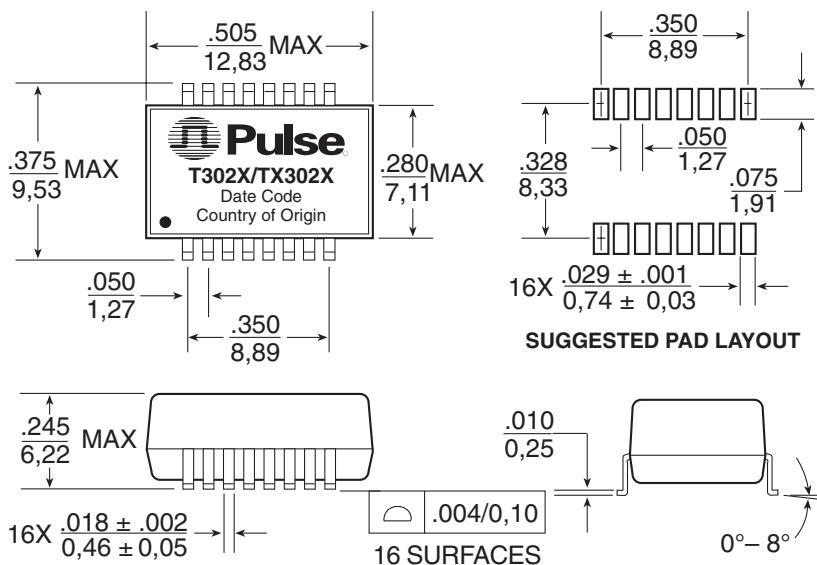

Weight 1.0 grams
Tape & Reel600/reel
Tube40/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$

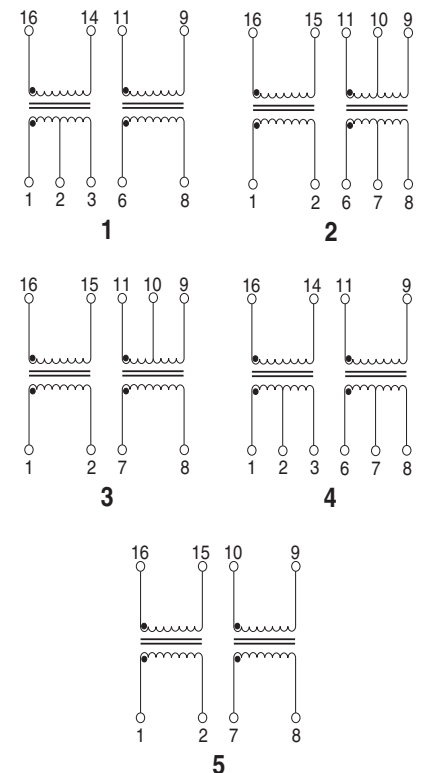

T3/DS3/E3/STS-1 TRANSFORMERS

Dual SMT, Extended Temperature Range



Application Notes

1. The transformers have been developed for use as transmit and receive transformers in T3 or DS3 links, using bit rates of 44.736 Mbps and B3ZS coding on coaxial cable. The characteristics allow compliance with the pulse templates of CCITT G.703 as well as ATT T.A.34. The transformers are also suitable for the E3 interface at 34.368 Mbps with HDB3 coding or STS-1 applications, at 51.84 Mbps according to Bellcore TA-NWT-000253.
2. Bandwidth specifications are typical in a 75 Ω system. Return loss meets the requirements of G.703. Materials used in the products are UL94-V0 recognized. Products meet the requirements of IEC 695-2-2 (Needle Flame Test).
3. For those applications requiring a 1:1 turns ratio on the transmit side, use only one half of the secondary (2CT) winding.
4. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. TX3026T).
5. For other T3/DS3/E3/STS-1 Transformers, please see data sheets **T606**, **T619**, **T672**, **T663** and **T668**.
6. **Transformer Selection Guide** - Please contact Pulse Applications Engineering or see our website for the latest Pulse Transformer Selection Guide.

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (China/Hong Kong)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 6287 8998 FAX: 65 6280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	9/F, Phase 2, Tai Sang Shatin Warehouse Centre 6 Wong Chuk Yeung Street Fotan, Shatin, Hong Kong TEL: 852 2788 6588 FAX: 852 2776 1055	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.