

Four-Way Power Divider, 10 - 500 MHz

Rev. V5

DS-112 Electrical Specifications¹: $T_A = -55^{\circ}\text{C}$ to $+85^{\circ}\text{C}$

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Insertion Loss	Less Coupling	10 - 400 MHz 400 - 500 MHz	dB dB	— —	— —	0.75 0.85
Isolation	—	10 - 500 MHz	dB	25	—	—
Amplitude Balance	—	10 - 500 MHz	dB	—	—	0.2
Phase Balance	—	10 - 500 MHz	°	—	—	5
VSWR	All Ports	10 - 25 MHz 25 - 500 MHz	Ratio Ratio	— —	— —	1.5:1 1.35:1


DS-312 Electrical Specifications¹: $T_A = -55^{\circ}\text{C}$ to $+85^{\circ}\text{C}$

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Insertion Loss	Less Coupling	10 - 400 MHz 400 - 500 MHz	dB dB	— —	— —	0.75 0.85
Isolation	—	10 - 500 MHz	dB	25	—	—
Amplitude Balance	—	10 - 500 MHz	dB	—	—	0.2
Phase Balance	—	10 - 500 MHz	°	—	—	2
VSWR	All Ports	10 - 400 MHz 400 - 500 MHz	Ratio Ratio	— —	— —	1.5:1 1.35:1


1. All specifications apply with 50 ohm source and load impedance.

Typical Performance Curves


Insertion Loss

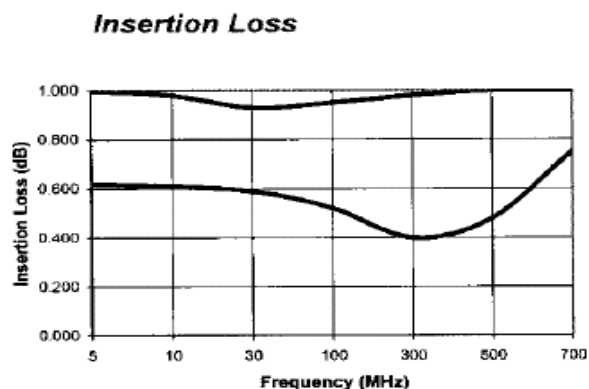

Isolation

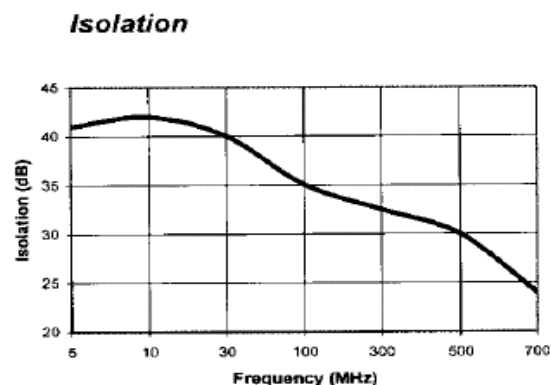

VSWR

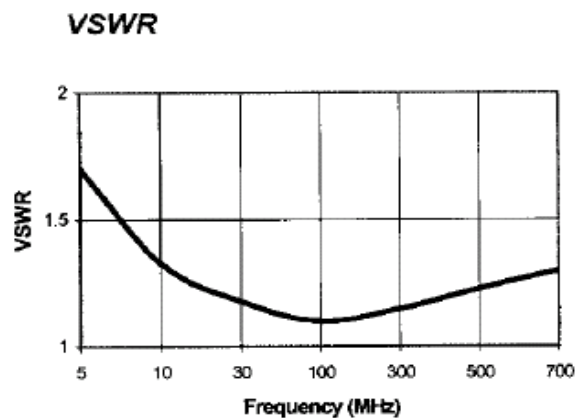

Ordering Information

Part Number	Package
DS-112 PIN	FP-2
DS-312 BNC	C-14
DS-312 TNC	C-14
DS-312 N	C-14
DS-312 SMA	C-14