

ADSL LINE TRANSFORMERS

For Broadcom ADSL CPE Chipsets



- Matched to Broadcom 6335 and 6338 chipsets with 5V line driver (BCM6301)
- Designed to meet UL1950 and EN60950 supplementary insulation requirements


Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C

Standard Part Number	RoHS-6 Compliant Part Number	Turns Ratio (Line:TX ±5%)	Turns Ratio (Line:RX)	OCL Line (μH ±5%)	Isolation Voltage (Vrms)
BX2542W	—	4.25 : 1	1 : 1	400	1500
BX2542L	BX2542LNL	4.25 : 1	1 : 1	400	1500
BX2606W	—	4.25 : 1	1 : 1	100	1500
BX2606L	BX2606LNL	4.25 : 1	1 : 1	100	1500


NOTE: Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (ex: BX2542WT).

Mechanicals

BX2542W & BX2606W

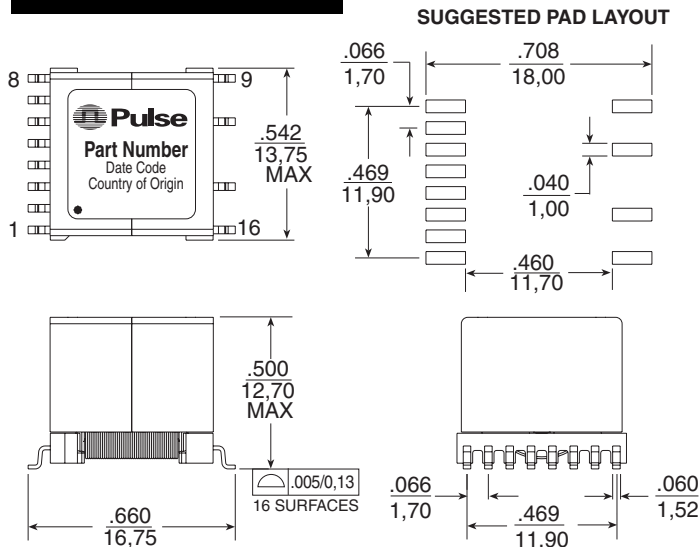


BX2542L/NL & BX2606L/NL

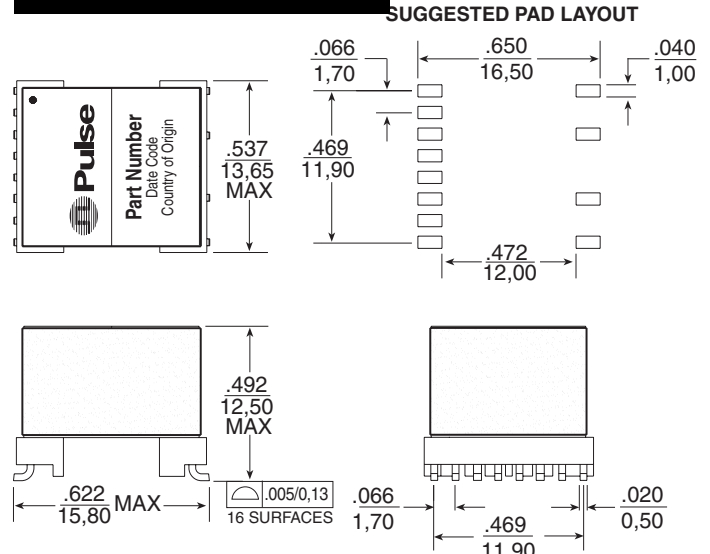

Weight6.2 grams
Tape & Reel300/reel
Tray95/tray

Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are ± .010
0,25

Schematic



For More Information:

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
www.pulseeng.com
TEL: 858 674 8100
FAX: 858 674 8262

Pulse Northern Europe

3 Huxley Road
Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

Pulse Southern Europe

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

Pulse China Headquarters

No. 1
Industrial District
Changan, Dongguan
China
TEL: 86 769 5538070
FAX: 86 769 5538870

Pulse North China

Room 1002
No. 819
Nanjing West Rd
Shanghai
China
TEL: 86 21 32181071
FAX: 86 21 32181396

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

Pulse North Asia

No. 26
Kao Ching Road
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
TEL: 886 3 4641811
FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2006. Pulse Engineering, Inc. All right reserved.

www.pulseeng.com

B848.B (2/06)