

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASED	07MAR2006	RG	SF
			B	REV PER ECO-10-020184	11JAN2011	RG	NE
			C	REV PER ECO-11-007678	11MAY2011	RG	DO

D

C

B

A

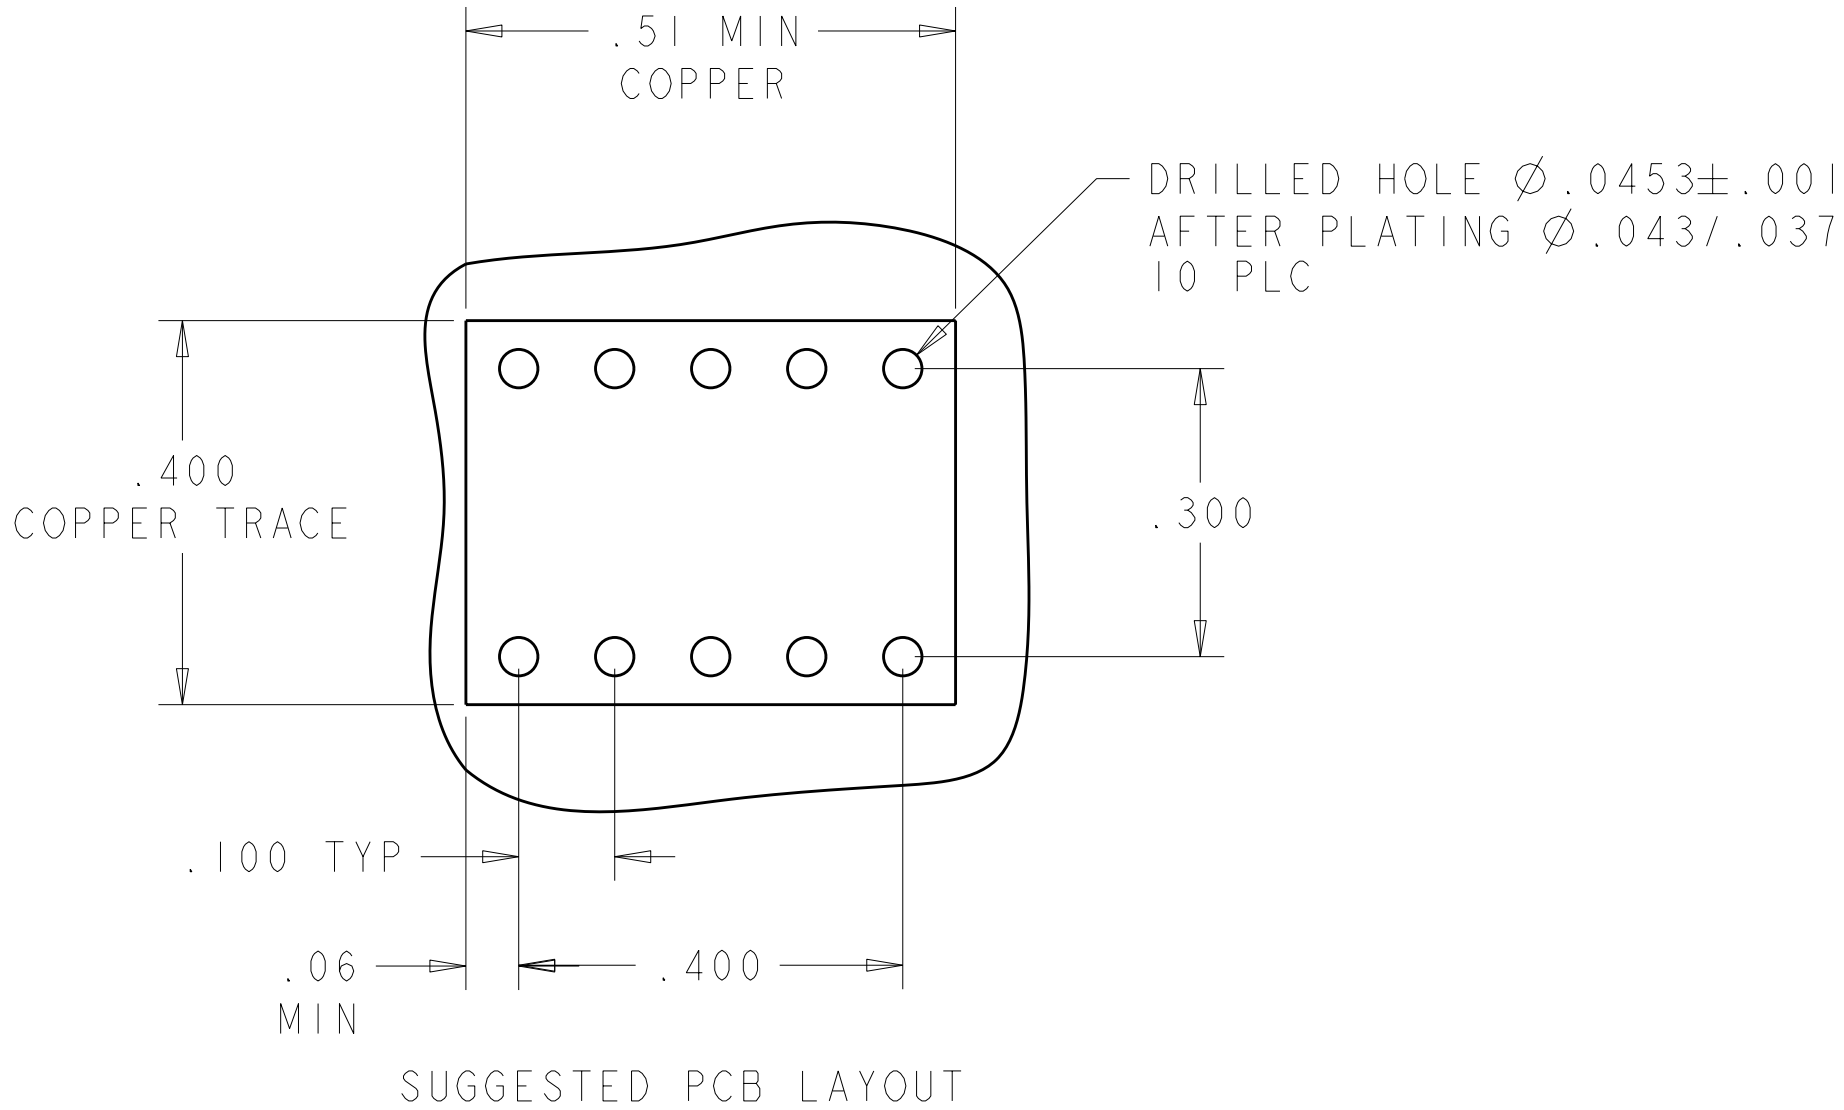


- PART NUMBER CHANGES AND/OR DESIGN CHANGES AFFECTING ITEM INTERCHANGEABILITY REQUIRE PRIOR TE APPROVAL AND AUTHORIZATION BY REVISION TO THIS DRAWING.
- ITEMS PROVIDED TO THIS SPECIFICATION TO BE IDENTIFIED ON CONTAINER WITH THE FOLLOWING INFORMATION:
PART NUMBER AND DATE CODE OF MFR.

- 3 MATERIALS:
INSULATOR-POLYESTER, GLASS FILLED UL 94 V-O RATED
MODULE-ZINC ALLOY
COMPLIANT PIN-PHOSPHOR BRONZE
CONTACT-BRASS ALLOY
CROWN-Be Cu
- 4 FINISH:
INSULATOR-COLOR BLACK
MODULE: .0002 [5.08 MICRONS] MIN THK. SILVER
OVER .00004 [1.02 MICRONS] MIN. THK. NICKEL
COMPLIANT PINS- .0002 [5.08 MICRONS] MIN THK. SILVER
OVER .00004 [1.02 MICRONS] MIN. THK. NICKEL
CROWN- .000040 [1.02 MICRONS] MIN THKGOLD (IN CONTACT AREA)
OVER .00004 [1.02 MICRONS] MIN. THK. NICKEL
CONTACT PIN: .0002 [5.08 MICRONS] MIN THK. SILVER
OVER .00004 [1.02 MICRONS] MIN. THK. NICKEL

5 A FIVE - POUND (5lb) FORCE IS REQUIRED TO CORRECTLY SEAT THE CONNECTOR WITH PLATED THRU HOLES LESS THAN Ø.040 INCH

ELCON

ICCON

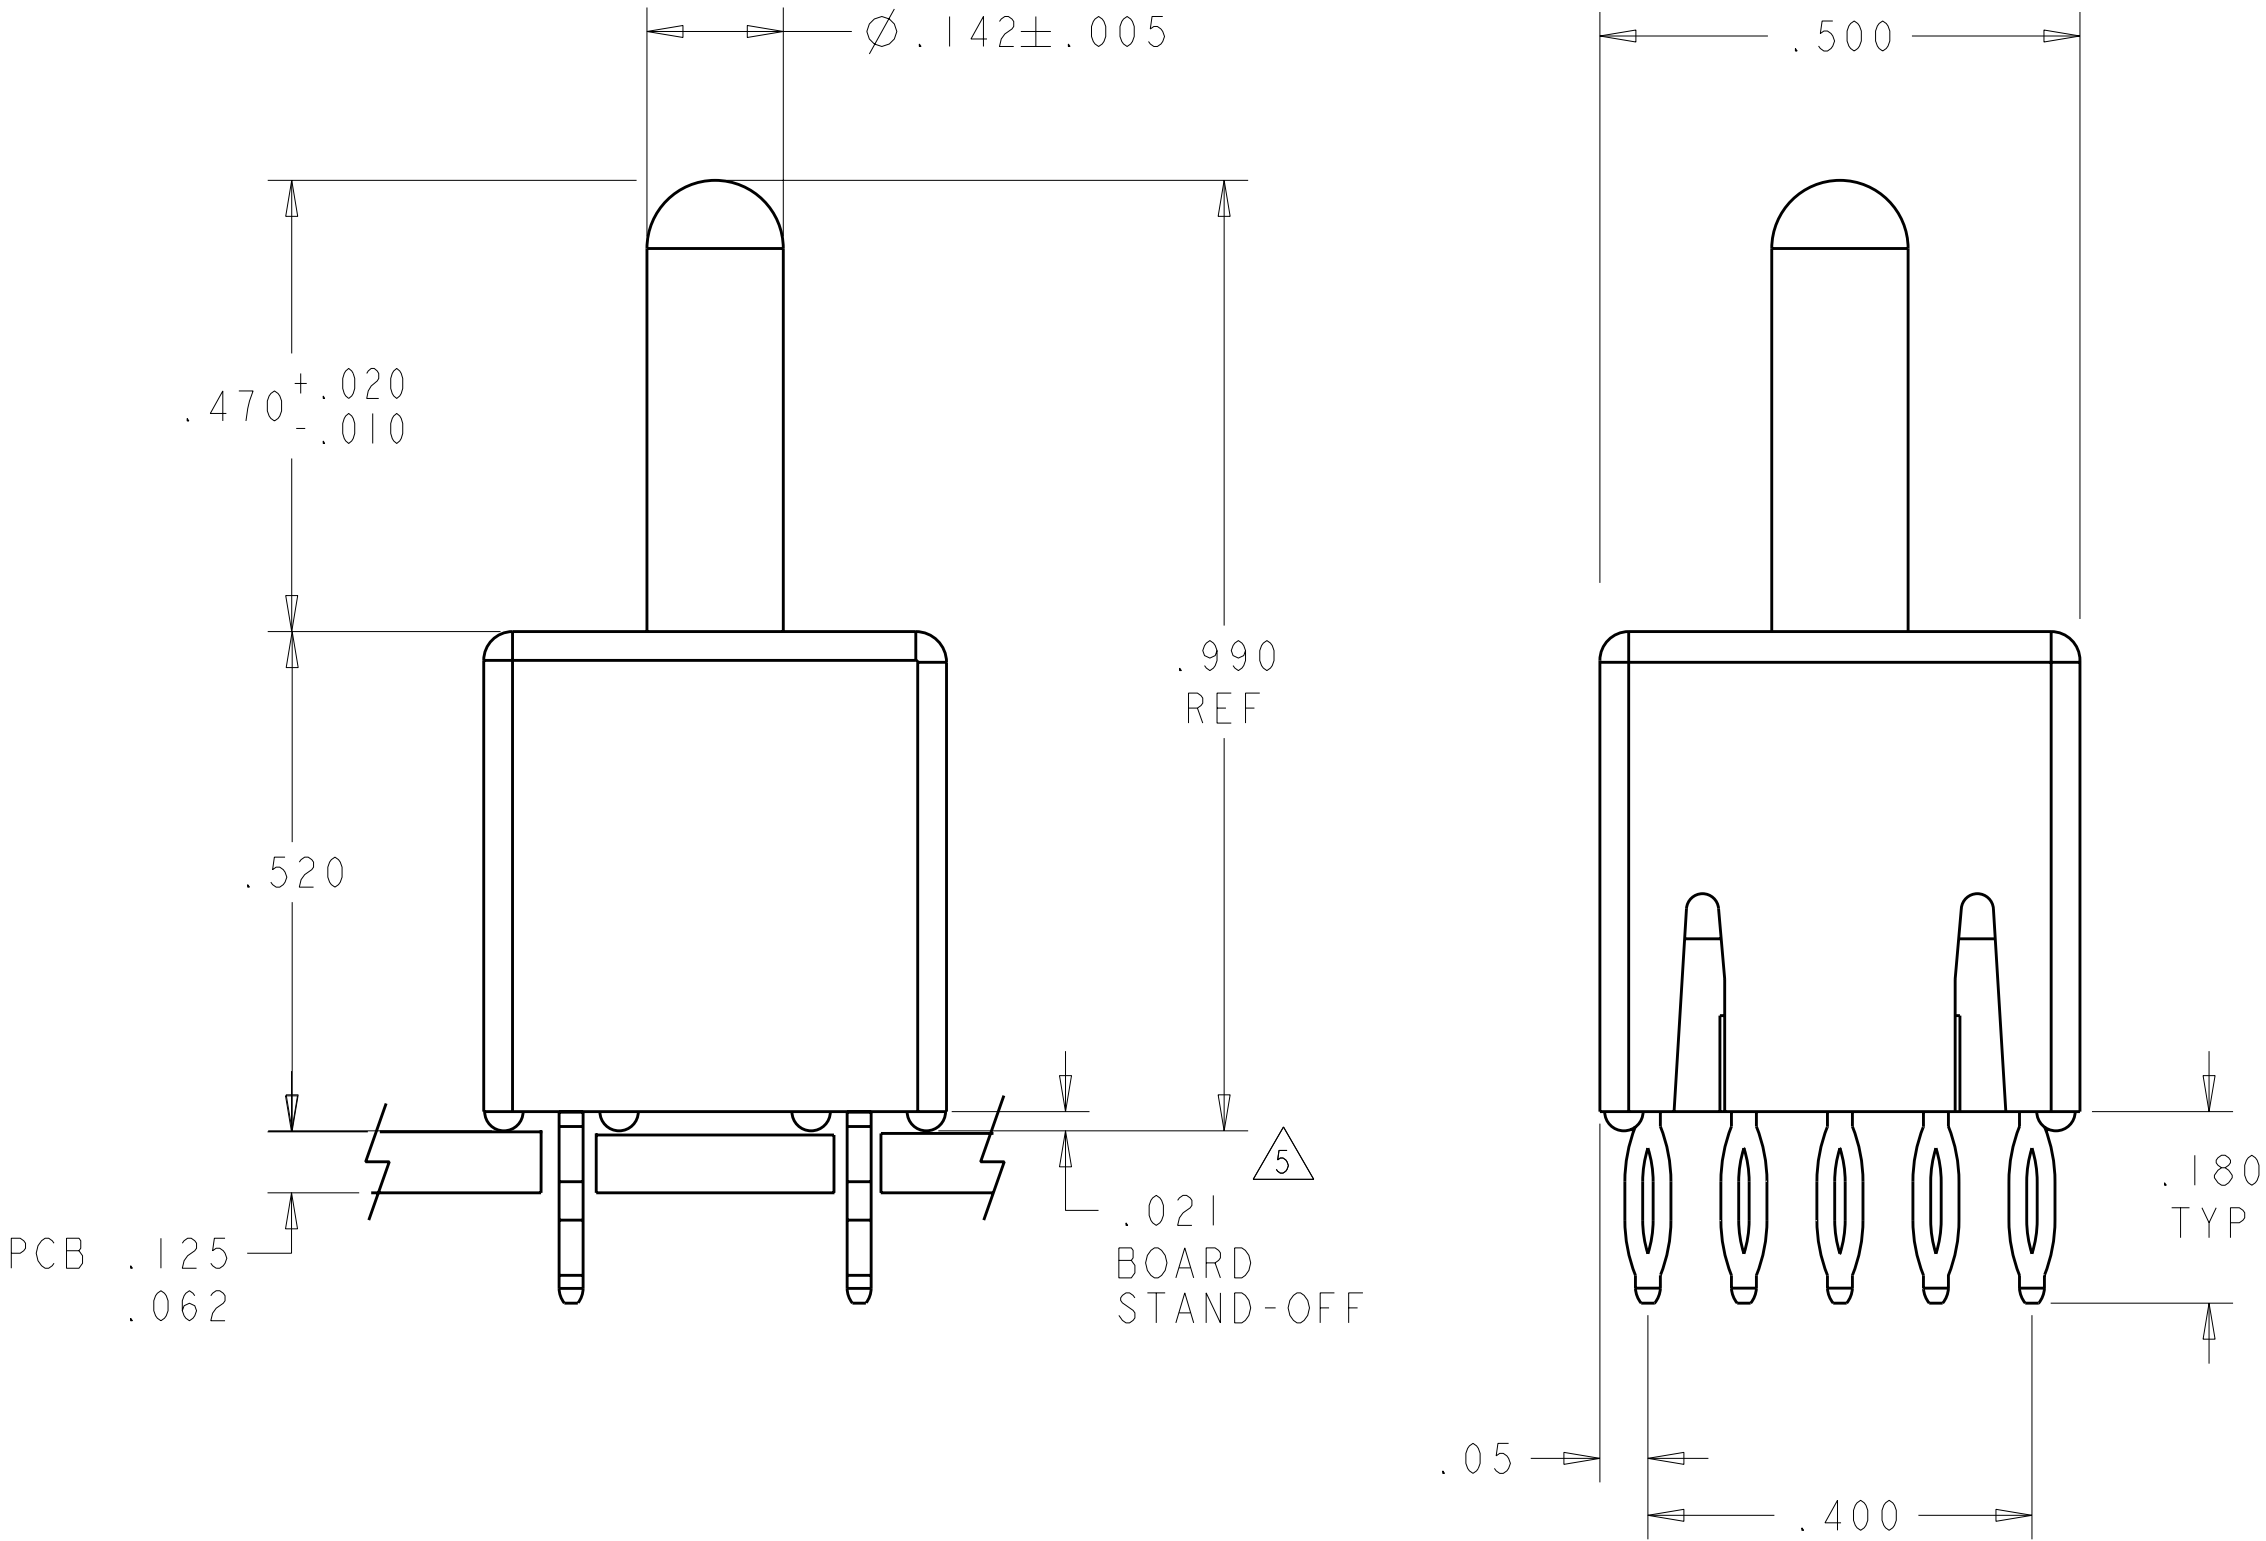

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.				DWN	06MAR06	AS SHOWN		6643274-1	
				CHK	R.GRZYBOWSKI	DESCRIPTION		PART NUMBER	
				APVD	S.FLICKINGER	tyco Electronics		Tyco Electronics Harrisburg, PA 17105-3608	
				PRODUCT SPEC	S.FLICKINGER				
				APPLICATION SPEC	S.FLICKINGER	NAME		ICCON PIN, PERPENDICULAR COMPLIANT, NON-LOCKING STYLE (BLACK)	
				WEIGHT	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				CUSTOMER DRAWING	-	A2	00779	C-6643274	-
				SCALE	5:1	SHEET	1	OF	1
				REV	C				