



TE CONNECTIVITY (TE) RESERVES THE RIGHT TO CHANGE THIS DRAWING AT ANYTIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.

REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	REVISED PER ECO-15-013263	09/09/2015	N. PRZYBYLSKA

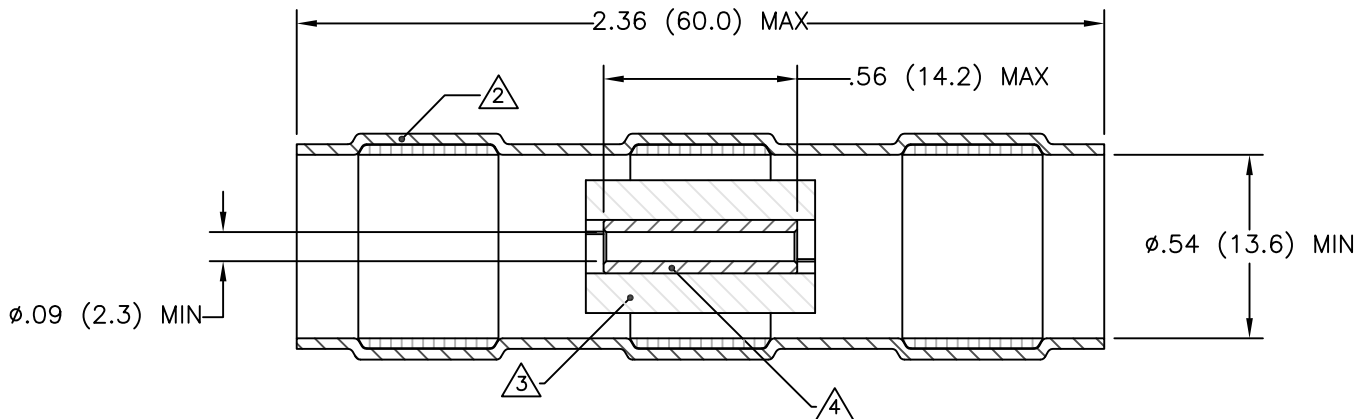

MATCHED IMPEDANCE SPLICE FOR RG393 COAXIAL CABLE REPAIR

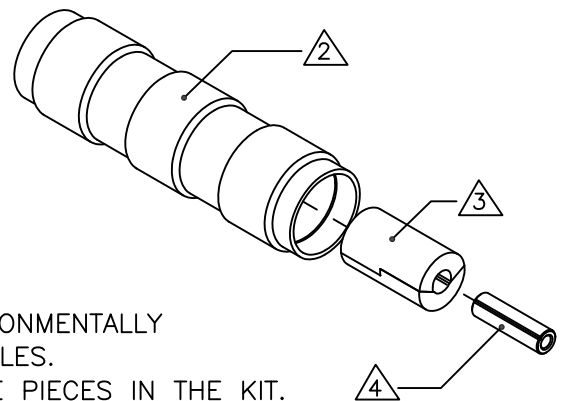

NOTES:

- THIS PRODUCT IS DESIGNED FOR USE IN MAKING ENVIRONMENTALLY PROTECTED PERMANENT JOINTS ON RG393 COAXIAL CABLES. COMPONENTS , , , WILL BE SUPPLIED AS LOOSE PIECES IN THE KIT.

SOLDERSLEEVE MATERIALS:

INSULATION SLEEVE: HEAT-SHRINKABLE, TRANSPARENT BLUE, RADIATION CROSS-LINK MODIFIED POLYVINYLIDENE FLUORIDE.

MELTABLE RINGS: THERMALLY STABILIZED THERMOPLASTIC – COLOR: BLUE.

SOLDER: TYPE Sn63 PER ANSI-J-STD-006.

DIELECTRIC INSERT MATERIAL: FLUORINATED ETHYLENE PROPYLENE.

CRIMP BARREL MATERIAL: ANNEALED COPPER PER ASTM B-152. FINISHES: TIN PLATED PER MIL-T-10727.

- INSTALLATION REQUIREMENTS TOOL: CV1981 HEAT GUN WITH PR13C REFLECTOR.
- FOR INSTALLATION PROCEDURE AND APPLICATION EQUIPMENT, REFER TO RPIP-1108.
- FOR PERFORMANCE AND TEST SPECIFICATIONS, REFER TO SPECIFICATION D-6204.
- FOR ADDITIONAL ORDERING INFORMATION, CONTACT TE TECHNICAL SUPPORT.

If this document is printed it becomes uncontrolled. Check for the latest revision

©2015 TE CONNECTIVITY LTD. FAMILY OF COMPANIES. ALL RIGHTS RESERVED
TE CONNECTIVITY AND TE CONNECTIVITY (LOGO) ARE TRADEMARKS.
OTHER LOGOS PRODUCT AND/OR COMPANY NAMES MAY BE TRADEMARKS OF THEIR RESPECTIVE OWNERS.

Raychem Devices
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. REFERENCE METRIC DIMENSIONS ARE IN BRACKETS [metric].	DRAWN: T. NGUYEN	DATE: 03/23/2015					TE Connectivity	
	CHECKED: N. PRZYBYLSKA	DATE: 03/25/2015						
	DECIMALS TOLERANCES: XXX ± .005 [0.13mm] XX ± .01 [0.25mm] X ± .1 [0.50mm]	APPROVED: N. PRZYBYLSKA	DATE: 04/10/2015	TITLE: D-150-Z393 – SOLDER SLEEVE				
		MATERIAL: SEE NOTES	FINISH: SEE NOTES					
ANGLES TOLERANCE: ± 1°	CAD FILE: D-150-Z393.dwg	THIRD ANGLE PROJECTION: 	SIZE: A	SHEET: 1 OF 1	CAGE CODE: 06090	DRAWING NO: D-150-Z393	REV. A	
SCALE: DO NOT SCALE THIS DRAWING								