



PRODUCT NUMBER	DESCRIPTION	NOTES
10112041-XXXXLF	NON-HF	SEE SHT. 3
10112041-XXXXHLF	HALOGEN FREE (H)	SEE SHT. 4

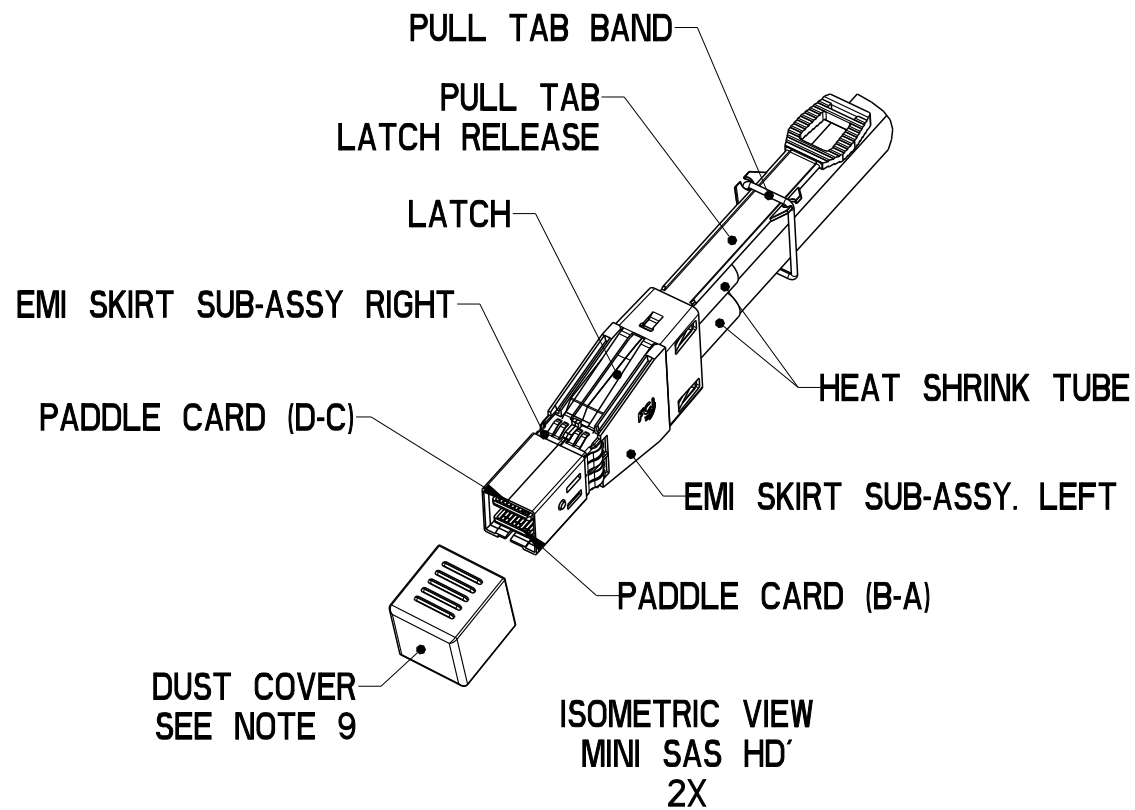


dr	Deborah Ingram	2010/05/07	projection	size	A3	scale	1:2
eng	Tom Feng	2015/08/12		mm			
chr	-	-		← →			ecn no ELX-N-21649-1
appr	Frank Mao	2015/08/12		product family	C&A	rel level	Released
FCI			title	FINAL ASSEMBLY (PASSIVE)			rev
www.fci.com				MSAS HD 4X ASSEMBLY (3Gb/s - 6Gb/s)			D
cat. no.			-	Product - Customer Drw			sheet 1 of 5

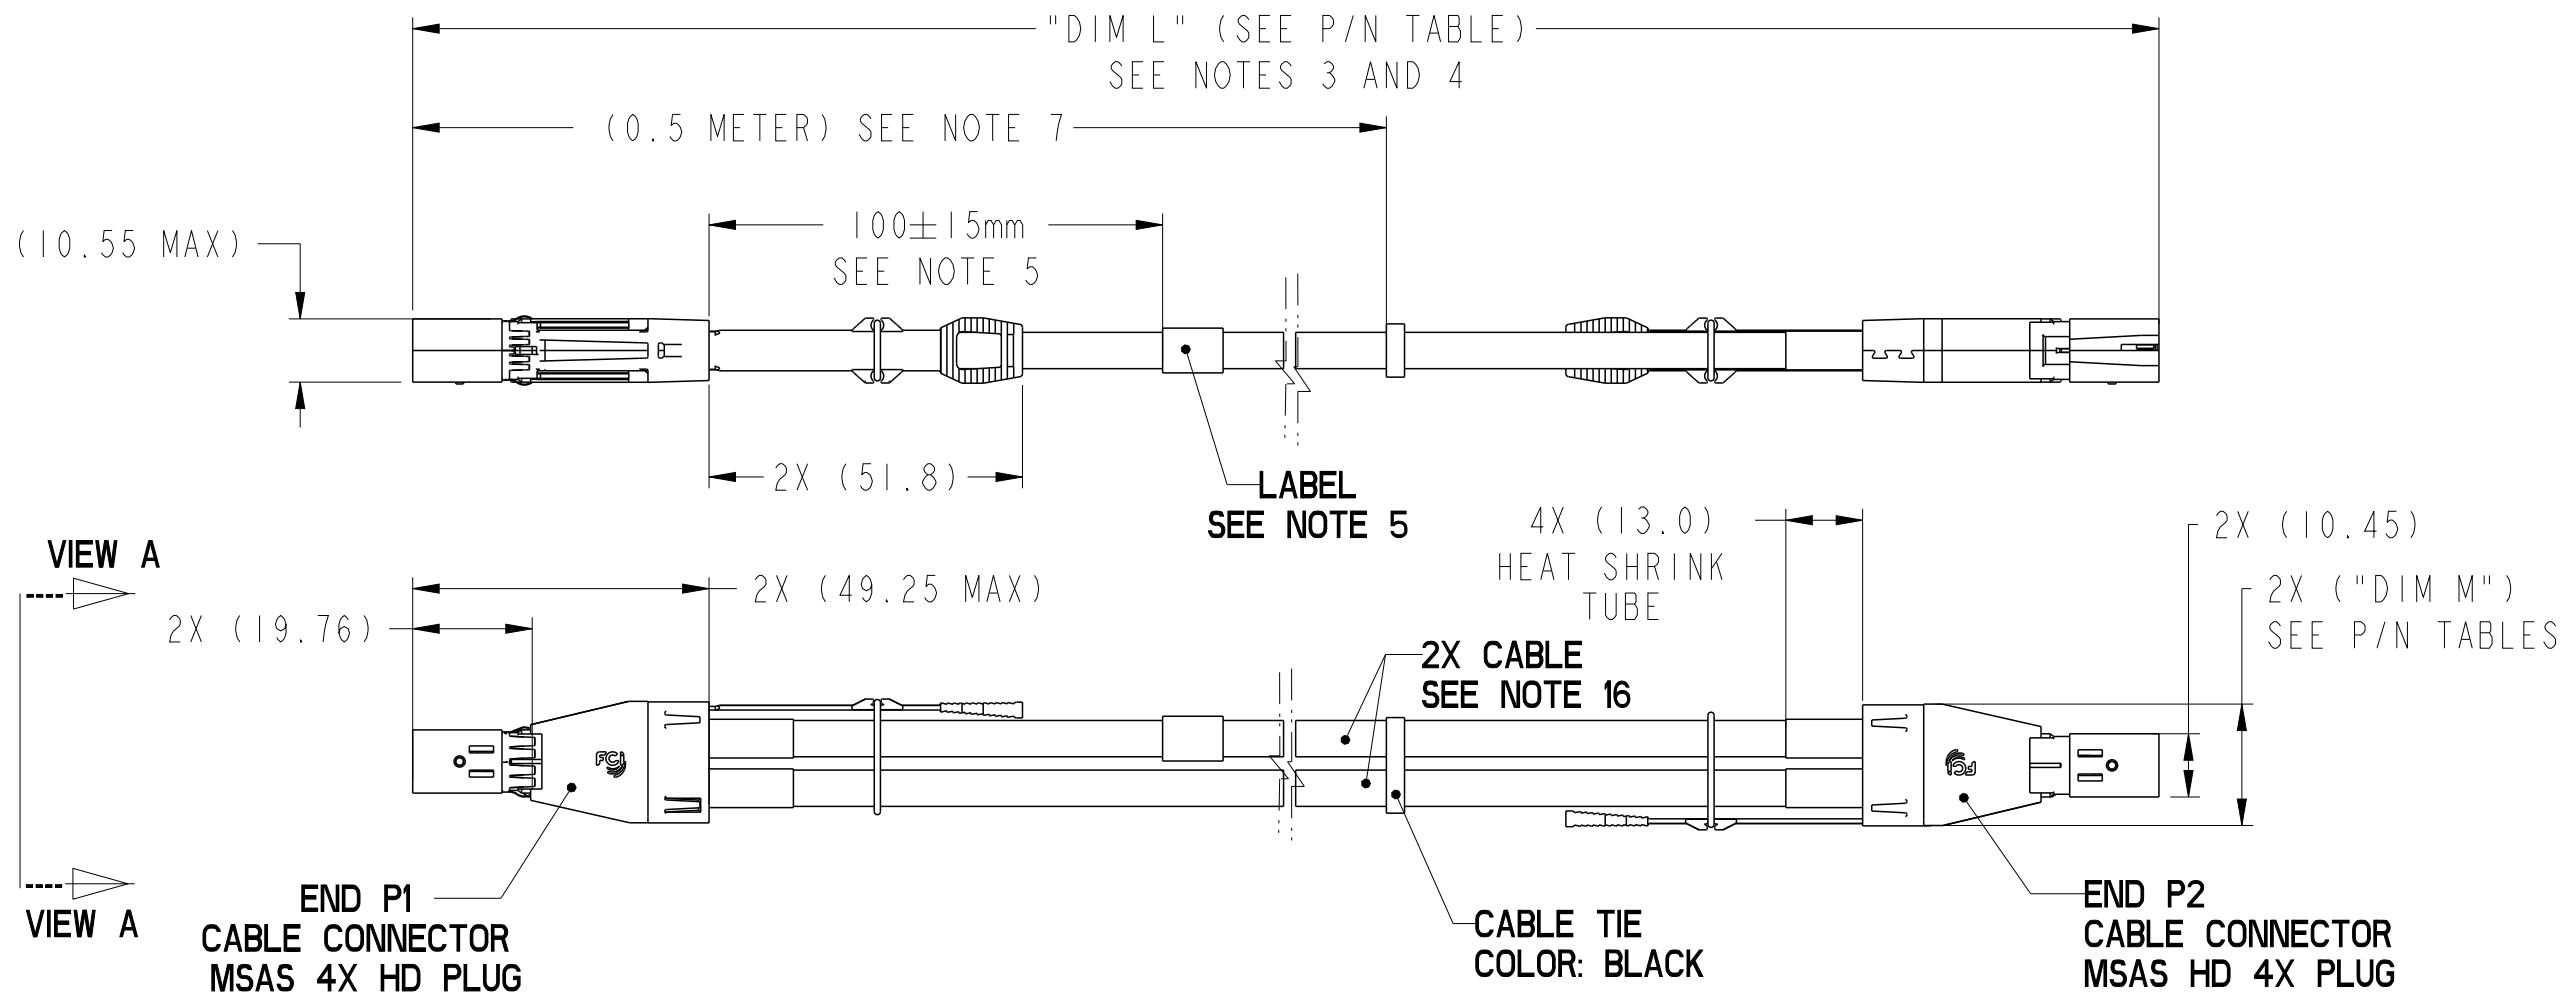


Copyright FCI.

PRODUCT NUMBER	DESCRIPTION	NOTES
10112041-XXXXLF	NON-HF	SEE SHT. 3
10112041-XXXXHLF	HALOGEN FREE (H)	SEE SHT. 4

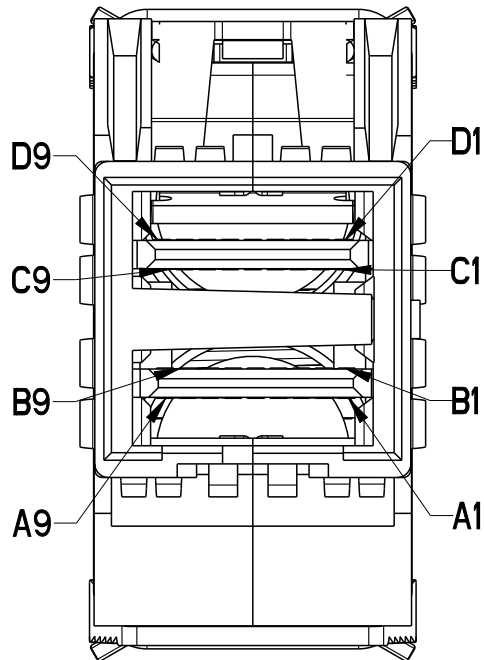

P1
VIEW A
SCALE 4:1

LEGEND:



HIGH-SPEED SERIAL
DIFFERENTIAL PAIRS




SIGNAL RETURN



POWER AND MANAGEMENT
INTERFACE

MINIMUM CABLE BEND TABLE

CABLE	("DIM Y") HF	("DIM Y") NON-HF
24 AWG	92.8	92.8
26 AWG	87.5	85.1
28 AWG	81.5	79.1
30 AWG	77.9	74.3

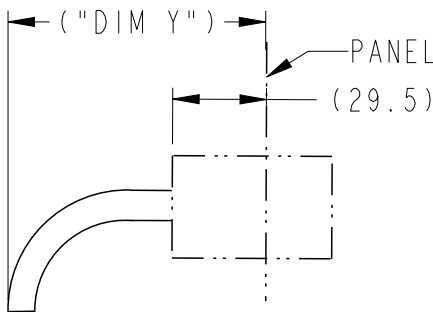

PENDING RADIUS
TOP VIEW OF CONNECTOR

WIRING LIST (SEE NOTE 6)

END P1			END P2		
POSITION	SYMBOL		POSITION	SYMBOL	
D9	GROUND	-----	B9	GROUND	
D8	Tx2-	⊖-----→	B8	Rx2-	
D7	Tx2+	⊕-----→	B7	Rx2+	
D6	GROUND	-----	B6	GROUND	
D5	Tx0-	⊖-----→	B5	Rx0-	
D4	Tx0+	⊕-----→	B4	Rx0+	
D3	GROUND	-----	B3	GROUND	
D2	Vman	←→	B2	ModPrsL	
D1	Vact	←→	B1	Vact	
C1	SCL	←→	A1	Reserved	
C2	SDA	←→	A2	IntL	
C3	GROUND	-----	A3	GROUND	
C4	Tx1+	⊕-----→	A4	Rx1+	
C5	Tx1-	⊖-----→	A5	Rx1-	
C6	GROUND	-----	A6	GROUND	
C7	Tx3+	⊕-----→	A7	Rx3+	
C8	Tx3-	⊖-----→	A8	Rx3-	
C9	GROUND	-----	A9	GROUND	
B9	GROUND	-----	D9	GROUND	
B8	Rx2-	⊖-----→	D8	Tx2-	
B7	Rx2+	⊕-----→	D7	Tx2+	
B6	GROUND	-----	D6	GROUND	
B5	Rx0-	⊖-----→	D5	Tx0-	
B4	Rx0+	⊕-----→	D4	Tx0+	
B3	GROUND	-----	D3	GROUND	
B2	ModPrsL	←→	D2	Vman	
B1	Vact	←→	D1	Vact	
A1	Reserved	←→	C1	SCL	
A2	IntL	←→	C2	SDA	
A3	GROUND	-----	C3	GROUND	
A4	Rx1+	⊕-----→	C4	Tx1+	
A5	Rx1-	⊖-----→	C5	Tx1-	
A6	GROUND	-----	C6	GROUND	
A7	Rx3+	⊕-----→	C7	Tx3+	
A8	Rx3-	⊖-----→	C8	Tx3-	
A9	GROUND	-----	C9	GROUND	

SHIELD-----→SHIELD

dr	Deborah Ingram	2010/05/07	projection	mm	size	A3	scale	1:2	
eng	Tom Feng	2015/08/12			ecn no	ELX-N-21649-1			
chr	-	-							
appr	Frank Mao	2015/08/12	product family		C&A	rel level	Released		
			title		FINAL ASSEMBLY (PASSIVE)		dwg no	10112041	rev
			MSAS HD 4X ASSEMBLY (3Gb/s - 6Gb/s)						
www.fci.com			cat. no.	-	Product - Customer Drw			sheet 2 of 5	

A

B

C

D

PART NUMBER (NON-HALOGEN FREE) SEE NOTE 12 AND 16	"DIM L" LENGTH (Meters)	"DIM M" (mm)	AWG
10112041-2005LF	0.5	17.3	30
10112041-2010LF	1.0	17.3	30
10112041-2015LF	1.5	17.3	30
10112041-2020LF	2.0	17.3	30
10112041-2025LF	2.5	17.3	30
10112041-2030LF	3.0	17.3	30
10112041-2040LF	4.0	17.3	30
10112041-3010LF	1.0	17.3	28
10112041-3015LF	1.5	17.3	28
10112041-3020LF	2.0	17.3	28
10112041-3025LF	2.5	17.3	28
10112041-3030LF	3.0	17.3	28
10112041-3035LF	3.5	17.3	28
10112041-3040LF	4.0	17.3	28
10112041-3045LF	4.5	17.3	28
10112041-3050LF	5.0	17.3	28
10112041-3060LF	6.0	17.3	28
10112041-3065LF	6.5	17.3	28
ONLY FOR CUSTOMER SPECIAL APPLIACATION, NOT STD OFFERING FOR THIS LENGTH			
10112041-4020LF	2.0	20.1	26
10112041-4025LF	2.5	20.1	26
10112041-4030LF	3.0	20.1	26
10112041-4035LF	3.5	20.1	26
10112041-4040LF	4.0	20.1	26
10112041-4045LF	4.5	20.1	26
10112041-4050LF	5.0	20.1	26
10112041-4055LF	5.5	20.1	26
10112041-4060LF	6.0	20.1	26
10112041-4065LF	6.5	20.1	26
10112041-4070LF	7.0	20.1	26
10112041-4080LF	8.0	20.1	26

NON-HALOGEN FREE CABLE ASSEMBLY PART NUMBERS

3


PART NUMBER (NON- HALOGEN FREE) SEE NOTE 12 AND 16	"DIM L" LENGTH (Meters)	"DIM M" (mm)	AWG
10112041-5030LF	3.0	20.1	24
10112041-5035LF	3.5	20.1	24
10112041-5040LF	4.0	20.1	24
10112041-5045LF	4.5	20.1	24
10112041-5050LF	5.0	20.1	24
10112041-5055LF	5.5	20.1	24
10112041-5060LF	6.0	20.1	24
10112041-5065LF	6.5	20.1	24
10112041-5070LF	7.0	20.1	24
10112041-5075LF	7.5	20.1	24
10112041-5080LF	8.0	20.1	24
10112041-5085LF	8.5	20.1	24
10112041-5090LF	9.0	20.1	24
10112041-5095LF	9.5	20.1	24
10112041-5100LF	10.0	20.1	24

A

B

C

D

dr	Deborah Ingram	2010/05/07	projection 	mm 	size	scale	
eng	Tom Feng	2015/08/12			A3	1:2	
chr	-	-			ecn no ELX-N-21649-1		
appr	Frank Mao	2015/08/12	product family C&A		rel level Released		
	title FINAL ASSEMBLY (PASSIVE) MSAS HD 4X ASSEMBLY (3Gb/s - 6Gb/s)				dwg no 10112041	rev D	
www.fci.com	cat. no.		-		Product - Customer Drw		sheet 3 of 5

2

3

PDS: Rev :D

STATUS:Released

Printed: Aug 12, 2015

1

2

3

4

A

B

C

D

A

B


C

D

PART NUMBER (HALOGEN FREE) SEE NOTE 11 AND 16	"DIM L" LENGTH (Meters)	"DIM M" (mm)	AWG
10112041-2005HLF	0.5	17.3	30
10112041-2010HLF	1.0	17.3	30
10112041-2015HLF	1.5	17.3	30
10112041-2020HLF	2.0	17.3	30
10112041-2025HLF	2.5	17.3	30
10112041-2030HLF	3.0	17.3	30
10112041-2040HLF	4.0	17.3	30
10112041-3010HLF	1.0	17.3	28
10112041-3015HLF	1.5	17.3	28
10112041-3020HLF	2.0	17.3	28
10112041-3025HLF	2.5	17.3	28
10112041-3030HLF	3.0	17.3	28
10112041-3035HLF	3.5	17.3	28
10112041-3040HLF	4.0	17.3	28
10112041-3045HLF	4.5	17.3	28
10112041-3050HLF	5.0	17.3	28
10112041-3060HLF	6.0	17.3	28
10112041-4020HLF	2.0	20.1	26
10112041-4025HLF	2.5	20.1	26
10112041-4030HLF	3.0	20.1	26
10112041-4035HLF	3.5	20.1	26
10112041-4040HLF	4.0	20.1	26
10112041-4045HLF	4.5	20.1	26
10112041-4050HLF	5.0	20.1	26
10112041-4055HLF	5.5	20.1	26
10112041-4060HLF	6.0	20.1	26
10112041-4065HLF	6.5	20.1	26
10112041-4070HLF	7.0	20.1	26
10112041-4080HLF	8.0	20.1	26

PART NUMBER (HALOGEN FREE) SEE NOTE 11 AND 16	"DIM L" LENGTH (Meters)	"DIM M" (mm)	AWG
10112041-5030HLF	3.0	20.1	24
10112041-5035HLF	3.5	20.1	24
10112041-5040HLF	4.0	20.1	24
10112041-5045HLF	4.5	20.1	24
10112041-5050HLF	5.0	20.1	24
10112041-5055HLF	5.5	20.1	24
10112041-5060HLF	6.0	20.1	24
10112041-5065HLF	6.5	20.1	24
10112041-5070HLF	7.0	20.1	24
10112041-5075HLF	7.5	20.1	24
10112041-5080HLF	8.0	20.1	24
10112041-5085HLF	8.5	20.1	24
10112041-5090HLF	9.0	20.1	24
10112041-5095HLF	9.5	20.1	24
10112041-5100HLF	10.0	20.1	24

HALOGEN FREE CABLE ASSEMBLY PART NUMBERS

dr	Deborah Ingram	2010/05/07	projection 	mm 	size	scale		
eng	Tom Feng	2015/08/12			A3	1:2		
chr	-	-			ecn no	ELX-N-21649-1		
appr	Frank Mao	2015/08/12	product family		C&A	rel level	Released	
		title			FINAL ASSEMBLY (PASSIVE)		dwg no	rev
		MSAS HD 4X ASSEMBLY (3Gb/s - 6Gb/s)			10112041			
www.fci.com		cat. no.		-	Product - Customer Drw			sheet 4 of 5

2

3

PDS: Rev :D

STATUS:Released

Printed: Aug 12, 2015

PRODUCT NUMBER	DESCRIPTION	NOTES
10112041-XXXXLF	NON-HF	SEE SHT. 3
10112041-XXXXHLF	HALOGEN FREE (H)	SEE SHT. 4

NOTES CONTINUED:

15. EEPROM INFORMATION REFER TO FCI LATEST PRODUCT SPEC. GS-12-651.
16. CABLE IS OPTIONAL,WHICH HAD BEEN QUALIFIED BY FCI AND MEET FCI PRODUCT SPEC. GS-12-651.

NOTES:

1 - MATERIAL:
BACK SHELLS: ZINC ALLOY/ COPPER UNDERPLATE/ NICKEL OVERPLATE
PULL TAB: THERMOPLASTIC POLYMER
LATCH : STAINLESS STEEL
FERRULE: BRASS
EMI SKIRT: STAINLESS STEEL
LOCTITE
PADDLE CARD: PRINTED CIRCUIT SUBSTRATE
HEAT SHRINK TUBE: HIGH POLYMER

2 - THIS PRODUCT MEETS THE RESTRICTION OF HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS) DIRECTIVE (2011/65/EU)

3. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.

4- UNLESS OTHERWISE SPECIFIED ASSEMBLED LENGTH TOLERANCE IS TO BE:
"DIM L" < 1 METER = $\pm 2.5\text{mm}$
"DIM L" 1 METER TO 10 METERS = $\pm 2\%$ OF "DIM L"
"DIM L" > 10 METERS = $+0.00/-4\%$ OF "DIM L"

5- LABEL DETAILS:
MANUFACTURER CODE OR NAME COUNTRY OF ORIGIN
FCI P/N
FCI CUSTOMER DRAWING REVISION
FCI SERIAL NUMBER
BAR CODE OF SERIAL NUMBER

FONT SHALL BE CLEARLY VISIBLE AND BLACK IN COLOR.

6- ALL CABLE ASSEMBLIES SHALL BE 100% TESTED FOR CONTINUITY AS DEFINED IN WIRING LIST.

7. PLACE A CABLE TIE EVERY 0.5 METER ON ALL ASSEMBLIES, UNLESS OTHERWISE SPECIFIED.
IN CASE OF 0.5 METER CABLE ASSEMBLY, CABLE TIE IS TO BE APPLIED AT THE MIDWAY POINT.

8 - OTHER TESTING PERFORMED AS REQUIRED BY PRODUCT SPECIFICATION: GS-12-651.

9 - PACKAGING OF LEAD FREE PRODUCTS MEETS LABELING AND PACKAGING PER SPECIFICATION GS-14-920.
PACKAGE CABLE ASSEMBLIES PER GS-14-1272.
DUST COVERS ARE TO BE ASSEMBLED PRIOR TO PACKAGING.
FCI PACKAGE TRACKING BAG LABEL IS ONLY FOR REFERENCE.

10. A "△" SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION. THE CURRENT REVISION WILL BE SHOWN IN THE SYMBOL.

11. "H" PRODUCT NUMBERS DESIGNATE THE USE OF HALOGEN FREE RAW CABLE.

12. HALOGEN FREE RAW CABLE CAN BE USED AS A SUBSTITUTE ON NON-HF PRODUCT NUMBERS.

13. MEETS ELECTRICAL REQUIREMENTS OF SAS 2.1.

14. MATES WITH SERIES: 10112626 or 10112627 or 10112628

FCI SERIAL NUMBER IS ONLY USED FOR TRACKING PRODUCT,DETAIL IS AS BELOW :


CN1352HA052L0001

CN PRESENT MADE IN CHINA
YYWW(YEAR AND WEEK)
PRESENT PRODUCT BASE NUMBER(USE "HA")

SEQUENCE NUMBER(0001~9999)
NON-HF OR HF TYPE(L IS NON-HALOGEN FREE,H IS HALOGEN FREE)
CABLE AWG(2 IS 30AWG,3 IS 28AWG,4 IS 26AWG,5 IS 24AWG)
LENGTH(05 IS 0.5METER,10 IS 1METER,15 IS 1.5METER,ETC)

CABLE LABEL EXAMPLE:



dr	Deborah Ingram	2010/05/07	projection 	mm 	size	A3	scale	1:2			
eng	Tom Feng	2015/08/12			ecn no	ELX-N-21649-1					
chr	-	-				rel level			Released		
appr	Frank Mao	2015/08/12	product family		C&A						
	title		FINAL ASSEMBLY (PASSIVE) MSAS HD 4X ASSEMBLY (3Gb/s - 6Gb/s)		dwg no		10112041		rev	D	
www.fci.com	cat. no.		-	Product - Customer Drw				sheet 5 of 5			