

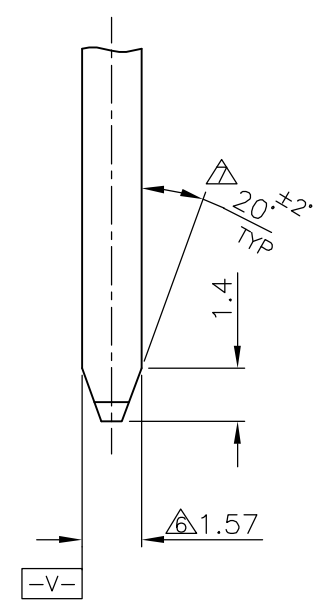
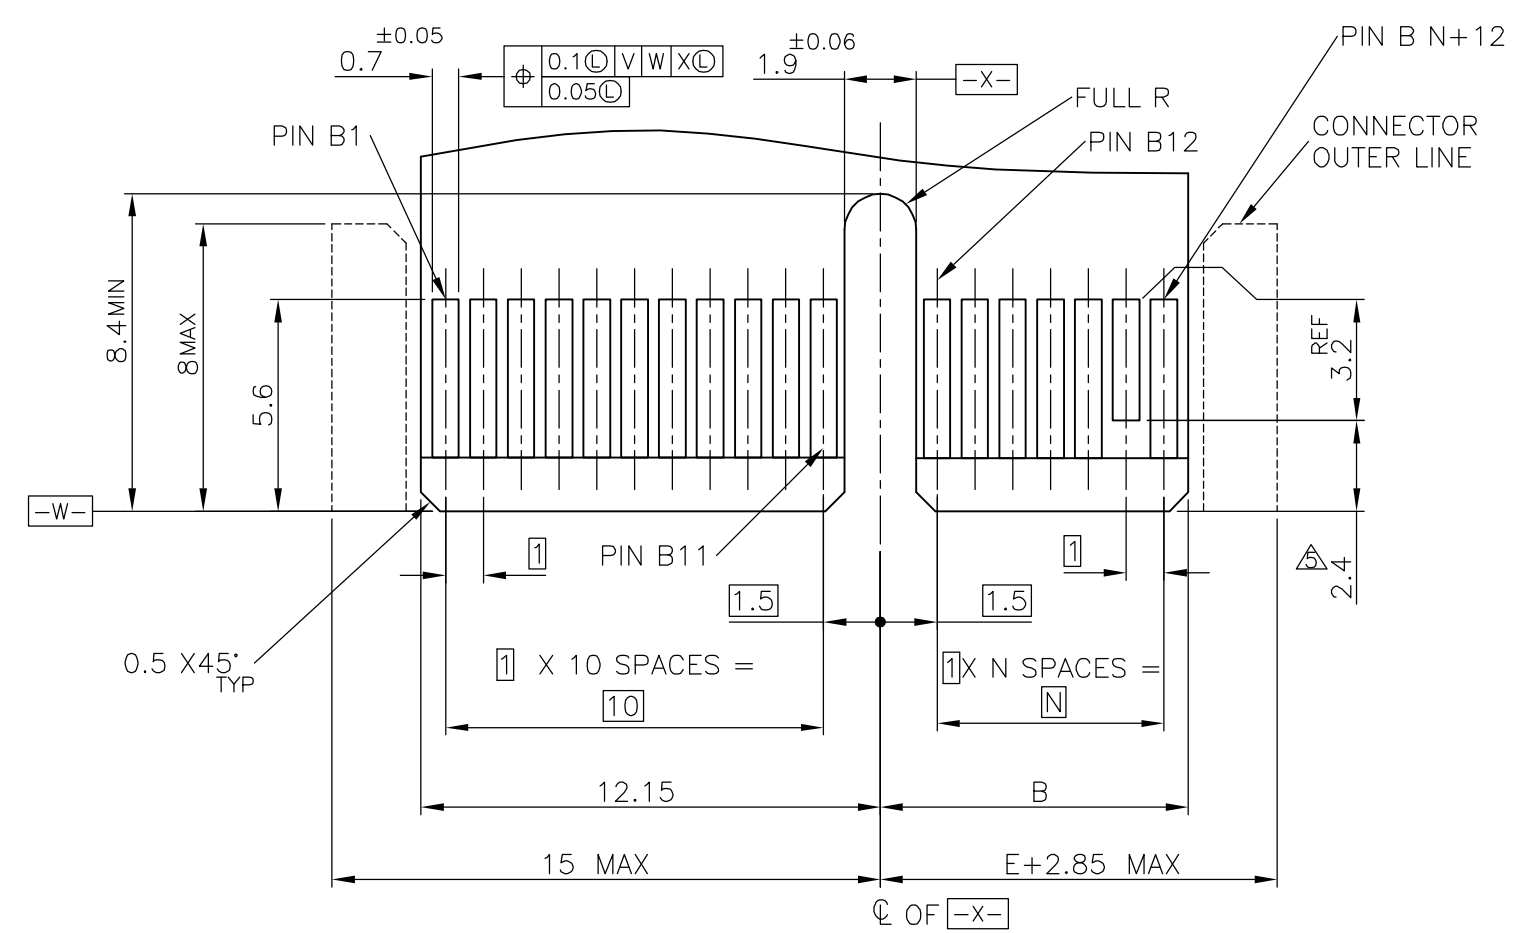


LOC		DIST		REVISIONS					
P	LTR	DESCRIPTION			DATE	DWN	APVD		
DW		SEE SHEET 1			-	-	-		

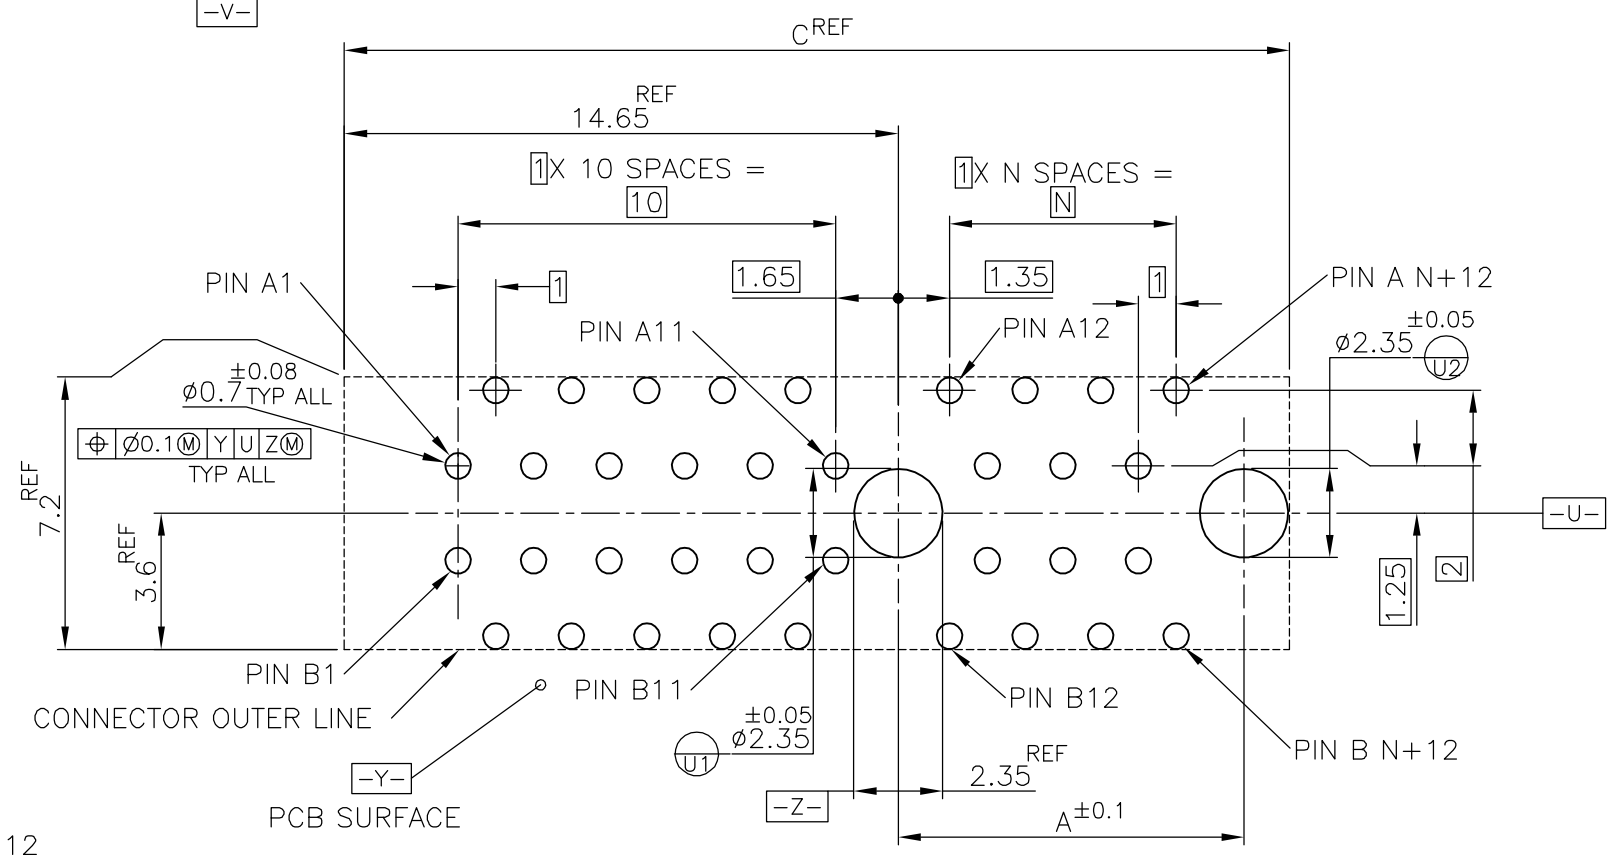

- THIS DIMENSION IS ONLY APPLIED TO PRSNT PINS.
- CARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.
- CHAMFER EDGES MUST BE FREE OF CUTTING BURRS.
- NO TIE BAR PERMITTED FROM CARD EDGE TO LEADING EDGE OF PAD FOR PRSNT PIN.
- APPLICATION NOTE;
GOLD CONTACT PAD : ELECTROLESS GOLD PLATING 0.05μm MIN.
OVER ELECTROLESS Ni PLATING 2μm MIN.

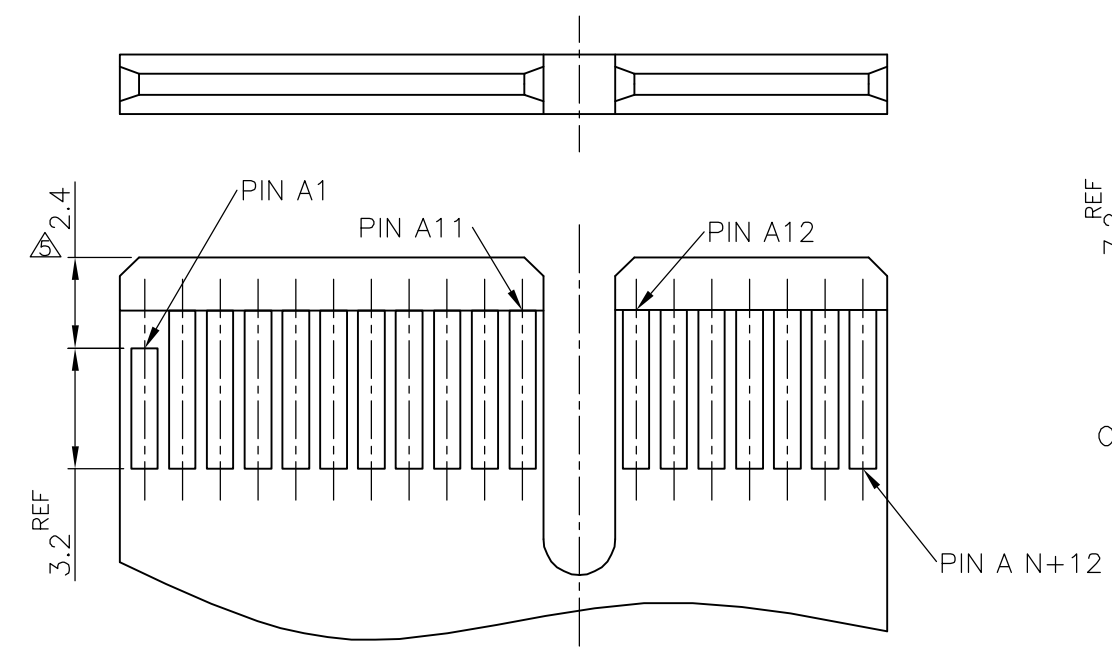

PCB PATTERN LAYOUT

MODULE LAYOUT(MATING PART ONLY)

A1,B17,B31,B48,B81	89	72.15	73.15	70	164	16
A1,B17,B31,B48	56	39.15	40.15	37	98	8
A1,B17,B31	39	22.15	23.15	20	64	4
A1,B17	25	8.15	9.15	6	36	1
PRSNT PIN	C	B	A	N	POS.	PORT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

Ø PLC	±	±0.13
1 PLC	±	±1
2 PLC	±	
3 PLC	±	
4 PLC	±	
ANGLES	±	
FINISH		

MATERIAL

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

tyco
Electronics

Tyco Holdings (Bermuda)
VII LTD, Taiwan Branch

NAME

PCI EXPRESS CARD EDGE CONN.
V-TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1612163

SCALE

SHEET

OF

REV

8:1

2

2

J