

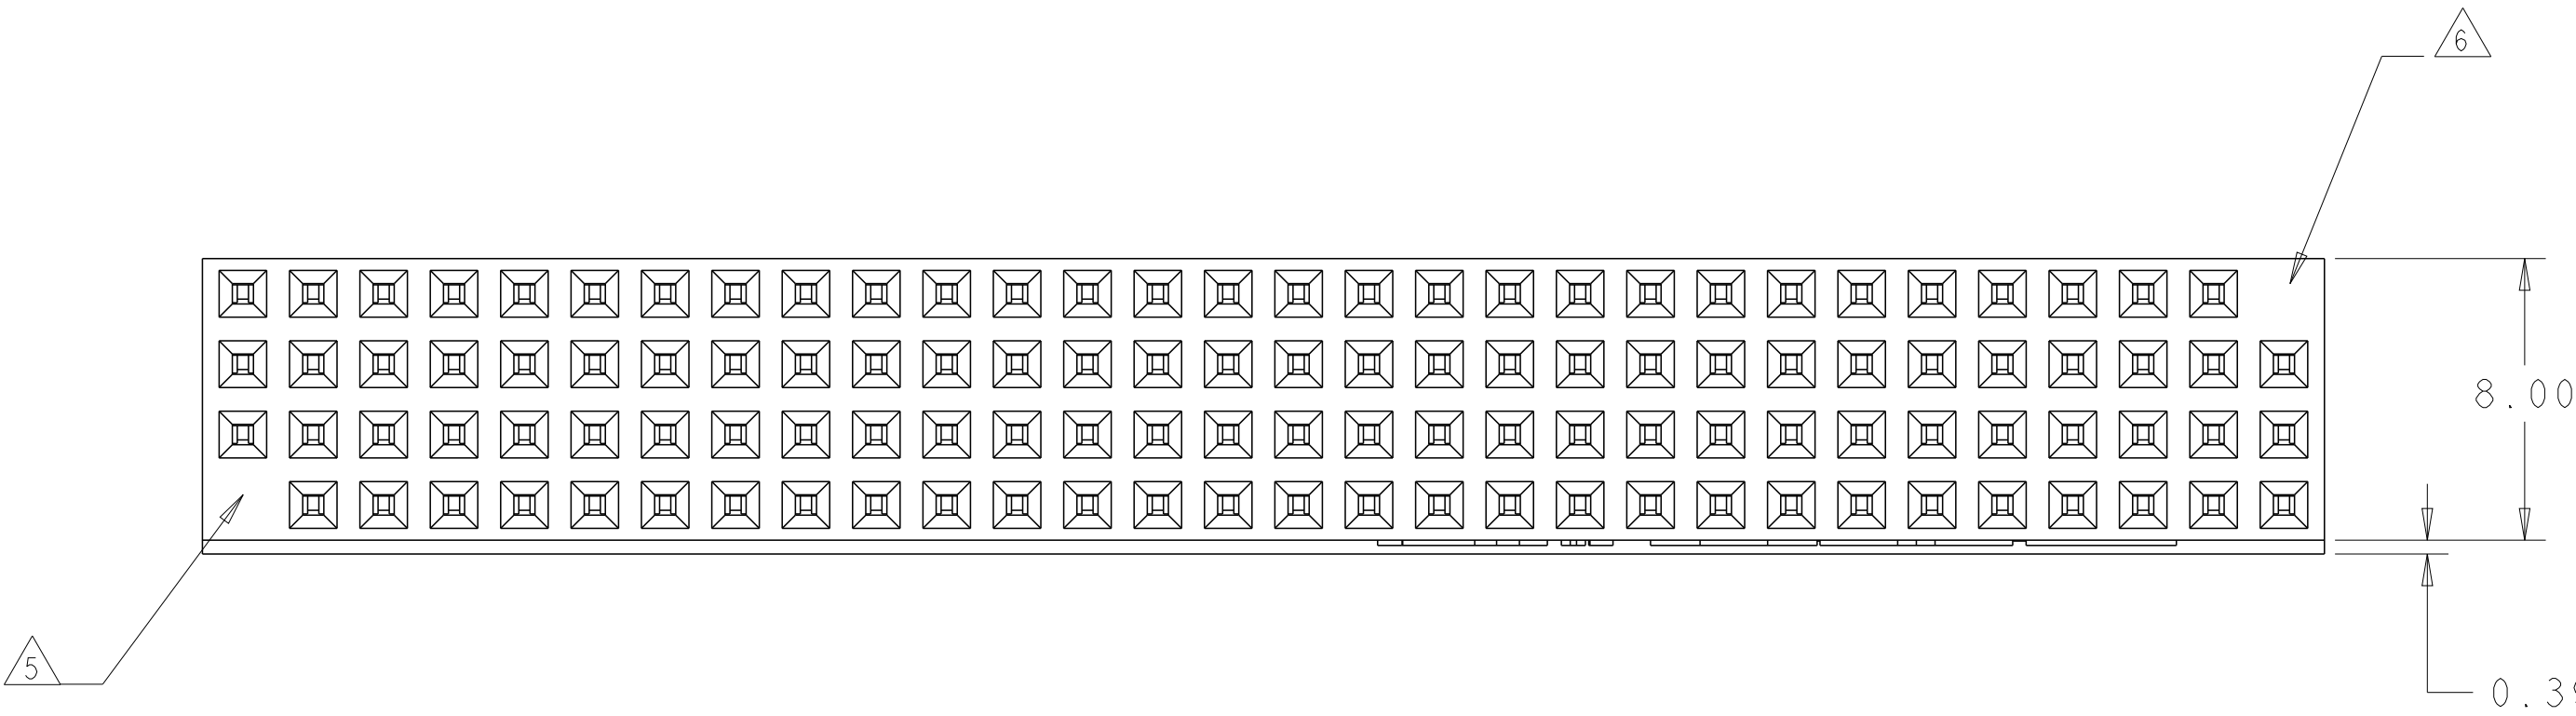


LOC		DIST		REVISIONS				
AD	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		G3		REVISED PER ECO-16-008038		21MAY2016	NK	JO

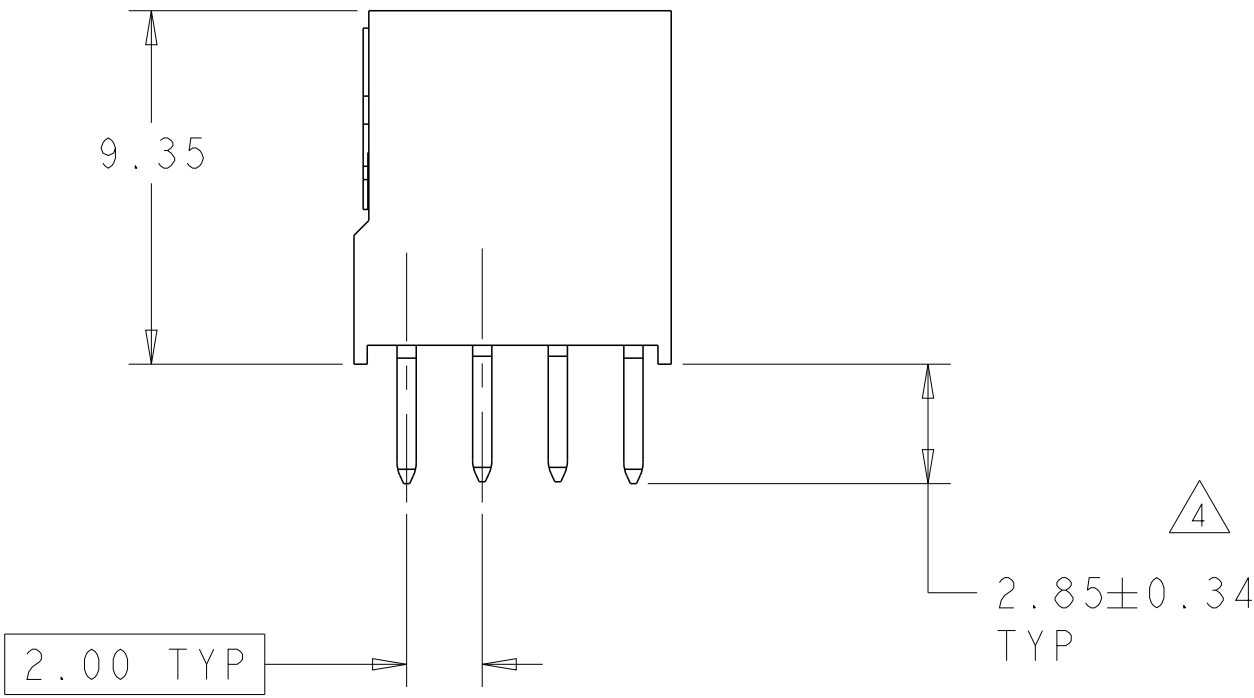

- 1 HOUSING: HIGH TEMPERATURE, GLASS FILLED NYLON, COLOR: BLACK.
CONTACTS: PHOSPHOR BRONZE.
- 2 CONTACTS: 0.000381 MIN GOLD ON MATING RECEPTACLE END, 0.00254 BRIGHT TIN-LEAD ON REMAINDER, ALL OVER 0.001270 NICKEL.
- 3 PCB HOLE RECOMMENDATIONS:
A. DRILL HOLE DIAMETER TO BE 1.00±0.02.
B. PLATING TO BE 0.005 MIN TIN-LEAD OVER 0.025-0.075 COPPER.
C. RECOMMENDED FINISH HOLE SIZE IS 0.88±0.08.
- 4 DIMENSION AFTER SEATING TO PCB.
- 5 NO CONTACT IN THIS POSITION FOR 1375800-2 & -5 ONLY.
- 6 NO CONTACT IN THIS POSITION FOR 1375800-3 & -6 ONLY.
- 7 CONTACTS: 0.000381 MIN GOLD ON MATING RECEPTACLE END, 0.00254-0.00508 MATTE TIN ON REMAINDER, ALL OVER 0.001270 NICKEL.
- 8 TO BE USED ON SILVER IMMERSION PLATED PCB'S (NOTE 9).
- 9 PCB HOLE RECOMMENDATIONS FOR SILVER IMMERSION PLATING:
A. DRILL HOLE DIAMETER TO BE 1.00-1.02.
B. PLATING TO BE 0.0001524-0.0004064 SILVER OVER 0.0508±0.0254 COPPER.
C. RECOMMENDED FINISH HOLE SIZE IS 0.94-0.97.
- 10 PCB HOLE RECOMMENDATIONS FOR ENIG PLATING:
A. DRILL HOLE DIAMETER TO BE 1.00-1.02.
B. PLATING TO BE 0.000051-0.000127 GOLD OVER 0.00305-0.00610 NICKEL ALL OVER 0.0508±0.0254 COPPER.
C. RECOMMENDED FINISH HOLE SIZE IS 0.94-0.97.
- 11 TO BE USED ON STANDARD PCB (NOTE 3) OR ENIG PLATED PCB (NOTE 10).
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

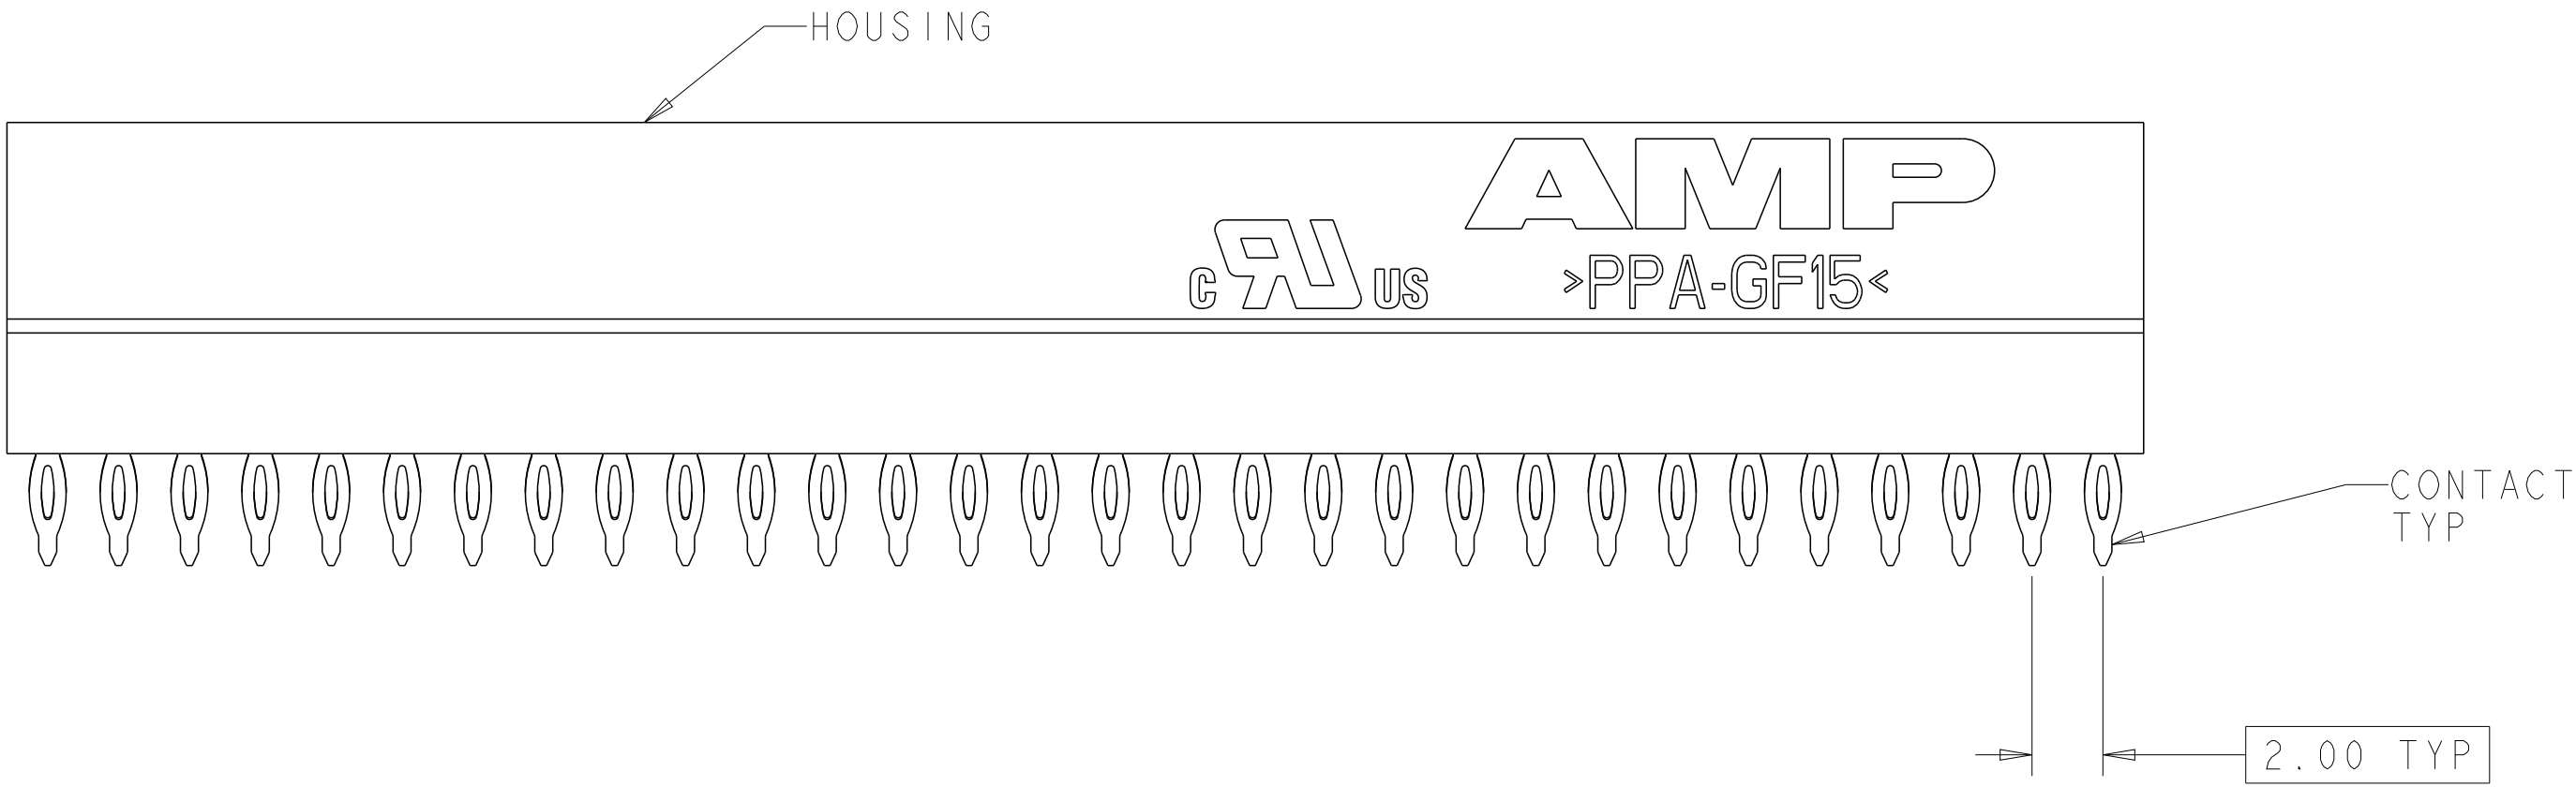

8	7	YES 6	1375800-6
8	7	YES 5	1375800-5
8	7	NO	1375800-4
11	2	YES 6	1375800-3
SUPERCEDED BY 1375800-5		YES 5	1375800-2
11	2	NO	1375800-1
FINISH		KEYED CIRCUIT	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
W.G.LENKER
CHK
L.BREKOSKY
APVD
J.OLSON

20JUN2000
15JAN2001
13JUN2001

DIMENSIONS:
mm

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±
±0.13
±
±
±
2
7

MATERIAL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
W.G.LENKER
CHK
L.BREKOSKY
APVD
J.OLSON

20JUN2000
15JAN2001
13JUN2001

DIMENSIONS:
mm

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±
±0.13
±
±
±
2
7

MATERIAL

PRODUCT SPEC
108-1956
APPLICATION SPEC
114-13021
WEIGHT
-

20JUN2000
15JAN2001
13JUN2001

NAME
ASSEMBLY, PC/104-PLUS,
NON-STACKTHROUGH CONTACTS,
PRESS FIT

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=1375800

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
5:1

SHEET
1


OF
2

REV
G3

TE Connectivity

TE Connectivity

4805 (3/11)

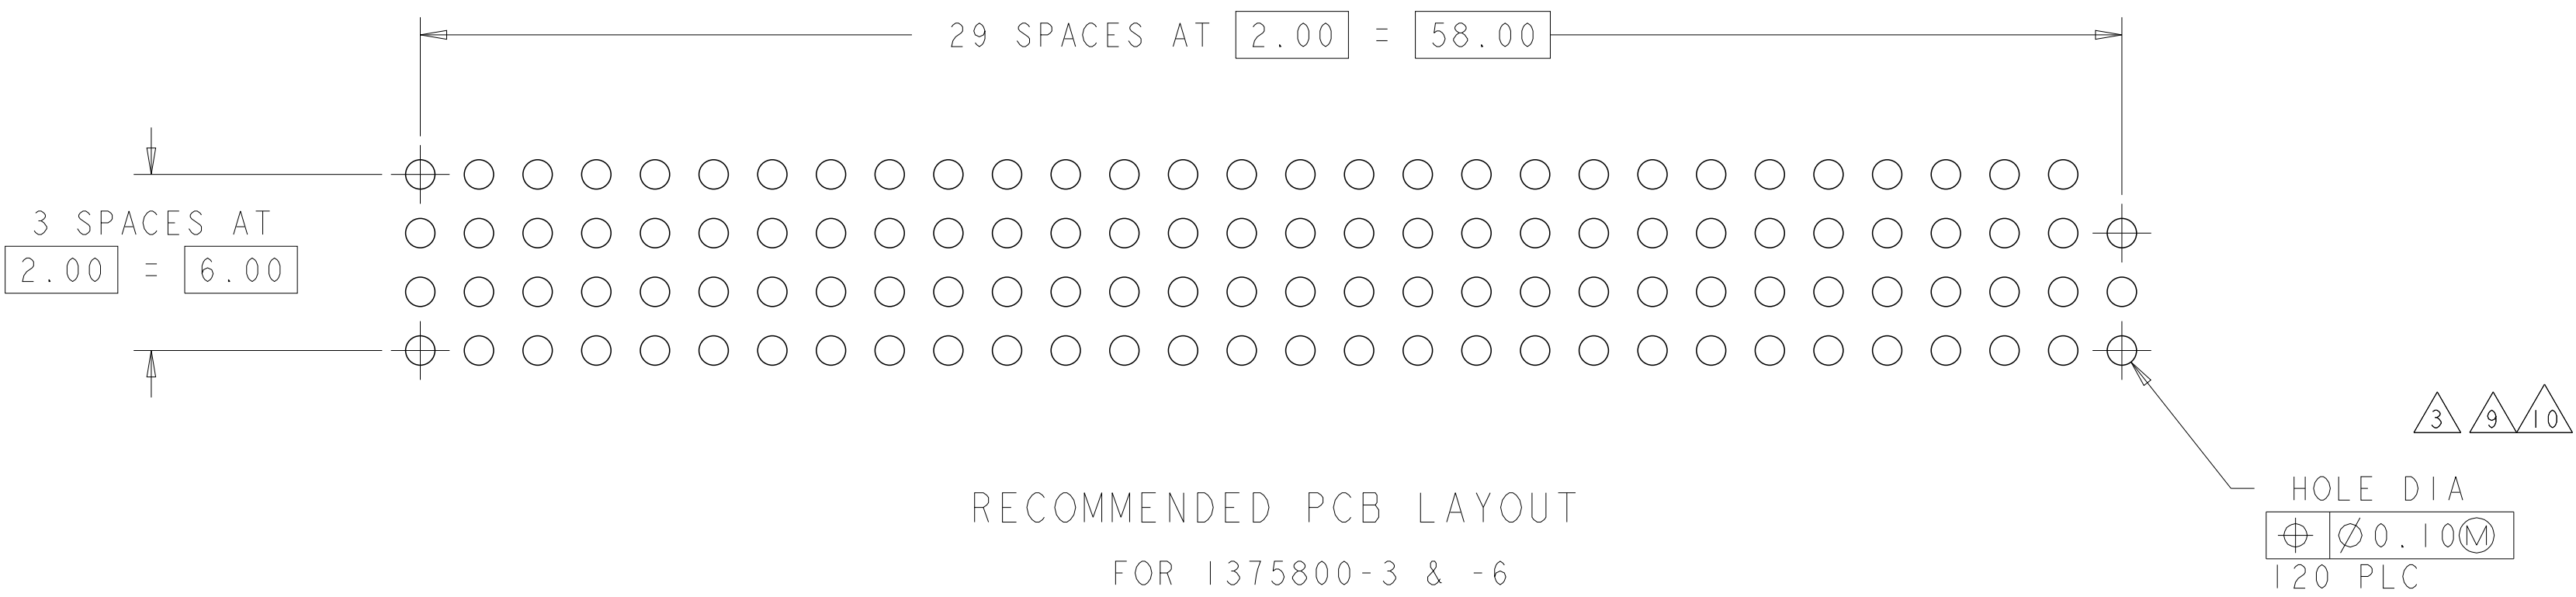4805 (3/11)