

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [35072-9902](#)
Status: **Active**
Description: MP-Lock™ Quick Disconnect, Female, for 10-14 AWG (5.26-2.08mm²), Metal Strip, Tab 6.35 x 0.81mm, Pre-Tin Plated

Documents:

[Drawing \(PDF\)](#) [Packaging Specification PK-35072-001 \(PDF\)](#)
[Product Specification PS-35960-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR95446
UL E92853

General

Product Family Quick Disconnects
Series [35072](#)
Crimp Quality Equipment Yes
Product Name MP-Lock™
Type Quick Disconnect
UPC 800753340558

Physical

Barrel Type Open
Gender Female
Glow-Wire Compliant No
Insulation None
Lock to Mating Part Yes
Material - Metal Brass
Material - Plating Mating Tin
Material - Plating Termination Tin
Net Weight 0.946/g
Orientation Straight
Packaging Type Reel
Plating min - Mating 0.813µm
Plating min - Termination 0.813µm
Polarized to Mating Part Yes
Tab Thickness 0.81mm
Tab Width 6.35mm
Temperature Range - Operating -40°C to +105°C
Termination Interface: Style Crimp or Compression
Wire Insulation Diameter 3.00-5.10mm
Wire Size AWG 10, 12, 14
Wire Size mm² 2.08 - 5.26

Electrical

Voltage - Maximum 300V

Material Info

Reference - Drawing Numbers

[Packaging Specification](#) PK-35072-001
[Product Specification](#) PS-35960-001
[Sales Drawing](#) SD-35072-9702

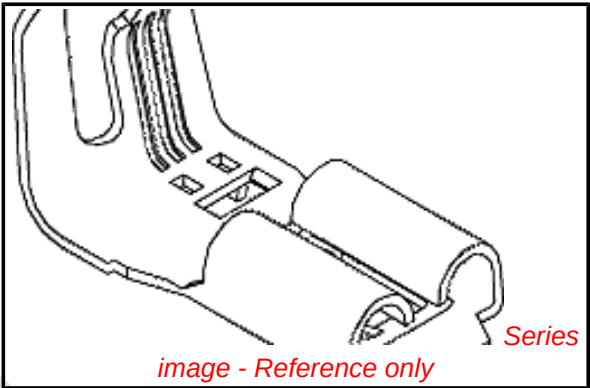


image - Reference only

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Contains SVHC: No
Low-Halogen Status
Low-Halogen

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[35072Series](#)

Use With

[35196](#) , [35959](#)

Application Tooling | FAQ

*Tooling specifications and manuals are
found by selecting the products below.
Crimp Height Specifications are then
contained in the Application Tooling
Specification document.*

Global

Description	Product #
Mini-Mac™ Applicator for Terminals, Rear- Feed	0638025200
Extraction Tool for Quick Disconnect	0638135500
Hand Tool for .250" Crimp Terminals	0638196500

Japan

Description	Product #
End-Feed Applicator	0573713100

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

onlinecomponents.com