
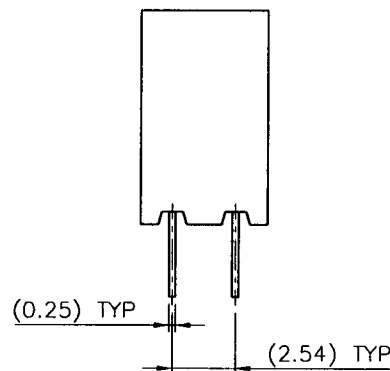
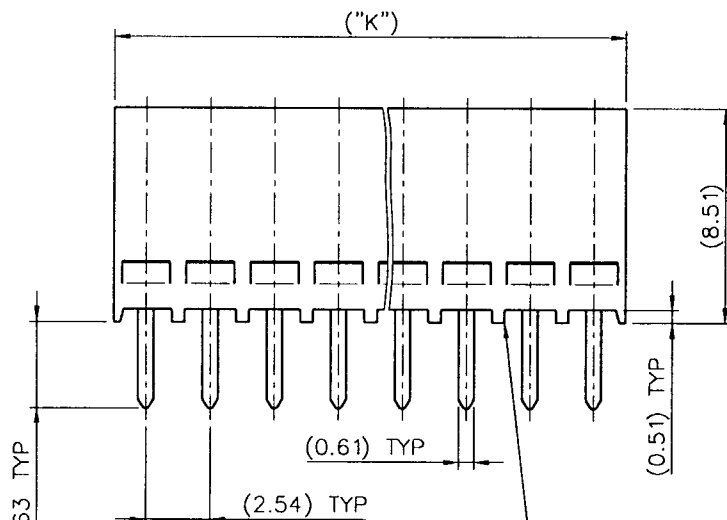


PRODUCT NUMBER	DIM "J"	DIM "K"
76316-XXX	SEE NEXT SHEET	
76316-XXXC	SEE NEXT SHEET	

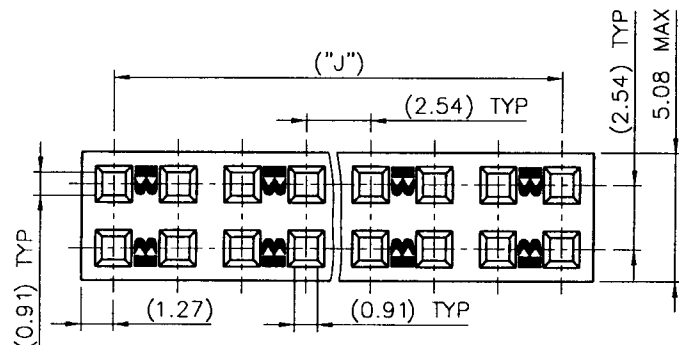

R TO FULL RADIUS ALLOWED TYP

NOTES:

- 1 MATERIAL HOUSING: THERMOPLASTIC POLYESTER
30 % GLASS FILLED, COLOUR BLUE, FLAME RETARDANT
PER UL 94-V0
- 2 MATERIAL BOX: BRASS ASTM B36 C26000-H02
- 3 MATERIAL SPRING: BERYLLIUM COPPER ASTM B 194
C 17200-TF 00
- 4 PLATING: SEE NEXT SHEET TIN PLATED
- 5 A LETTER "C" AT THE END OF PART NUMBER TO INDICATE
PACKAGING IN SHORT TUBES (550mm).

mal'l code				tolerances unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
SEE NOTES						projection		title	
lir	ecn no	dr	date	linear		mm		V. C. C.	
B	F80325	DLE	98.05.07	angles		5:1		DOUBLE ROW .100x.100	
				dr	DLE	98.05.07		product family	BERGCON
				engr	AESCHBACHER	98.05.07		size	213
				chr	AESCHBACHER	98.05.07		dwg no	76316
				appd	NIZZI	98.05.07		sheet	1 of 2
sheet index	revision	B	8						
	sheet	1	2						

For all other products, please refer to the "BERG" logo in the top right corner of the drawing. The "BERG" logo is a registered trademark of BERG ELECTRONICS.

BERG
ELECTRONICS

All other products, please refer to the "BERG" logo in the top right corner of the drawing. The "BERG" logo is a registered trademark of BERG ELECTRONICS.

PRODUCT NUMBER	NBR OF POS	DIM "J"	DIM "K"
76316-X02(C)	2x02	(2.54)	(5.08)
76316-X03(C)	2x03	(5.08)	(7.62)
76316-X04(C)	2x04	(7.62)	(10.16)
76316-X05(C)	2x05	(10.16)	(12.70)
76316-X06(C)	2x06	(12.70)	(15.24)
76316-X07(C)	2x07	(15.24)	(17.78)
76316-X08(C)	2x08	(17.78)	(20.32)
76316-X09(C)	2x09	(20.32)	(22.86)
76316-X10(C)	2x10	(22.86)	(25.40)
76316-X11(C)	2x11	(25.40)	(27.94)
76316-X12(C)	2x12	(27.94)	(30.48)
76316-X13(C)	2x13	(30.48)	(33.02)
76316-X14(C)	2x14	(33.02)	(35.56)
76316-X15(C)	2x15	(35.56)	(38.10)
76316-X16(C)	2x16	(38.10)	(40.64)
76316-X17(C)	2x17	(40.64)	(43.18)
76316-X18(C)	2x18	(43.18)	(45.72)
76316-X19(C)	2x19	(45.72)	(48.26)
76316-X20(C)	2x20	(48.26)	(50.80)
76316-X21(C)	2x21	(50.80)	(53.34)
76316-X22(C)	2x22	(53.34)	(55.88)
76316-X23(C)	2x23	(55.88)	(58.42)
76316-X24(C)	2x24	(58.42)	(60.96)
76316-X25(C)	2x25	(60.96)	(63.50)

PRODUCT NUMBER	NBR OF POS	DIM "J"	DIM "K"
76316-X26(C)	2x26	(63.50)	(66.04)
76316-X27(C)	2x27	(66.04)	(68.58)
76316-X28(C)	2x28	(68.58)	(71.12)
76316-X29(C)	2x29	(71.12)	(73.66)
76316-X30(C)	2x30	(73.66)	(76.20)
76316-X31(C)	2x31	(76.20)	(78.74)
76316-X32(C)	2x32	(78.74)	(81.28)
76316-X33(C)	2x33	(81.28)	(83.82)
76316-X34(C)	2x34	(83.82)	(86.36)
76316-X35(C)	2x35	(86.36)	(88.90)
76316-X36(C)	2x36	(88.90)	(91.44)
76316-X37(C)	2x37	(91.44)	(93.98)
76316-X38(C)	2x38	(93.98)	(96.52)
76316-X39(C)	2x39	(96.52)	(99.06)
76316-X40(C)	2x40	(99.06)	(101.60)
76316-X41(C)	2x41	(101.60)	(104.14)
76316-X42(C)	2x42	(104.14)	(106.68)
76316-X43(C)	2x43	(106.68)	(109.22)
76316-X44(C)	2x44	(109.22)	(111.76)
76316-X45(C)	2x45	(111.76)	(114.30)
76316-X46(C)	2x46	(114.30)	(116.84)
76316-X47(C)	2x47	(116.84)	(119.38)
76316-X48(C)	2x48	(119.38)	(121.92)
76316-X49(C)	2x49	(121.92)	(124.46)
76316-X50(C)	2x50	(124.46)	(127.00)

76316-9XX(C)	5µm Sn/Pb	1.25µm Sn/Pb
PLATING CODE X	PLATING THICKNESS IN CONTACT AREA	PRE-PLTEAD FLASH THICKNESS

mat'l code SEE TABLE				tolerances unless otherwise specified				CUSTOMER COPY		BERG ELECTRONICS	
lir	ecr no	dr	date	linear				projection	title V. C. C.		
B	F80325	DLE	98.05.07						DOUBLE ROW .100x.100		
				angles					product family BERGCON		
				dr	DLE	98.05.07		mm	code 213		
				engr	AESCHBACHER	98.05.07			size dwg no		
				chr	AESCHBACHER	98.05.07		scale	sheet		
				appd	NIZZI	98.05.07		N/A	2 of 2		
sheet index	revision sheet										