

DATA SHEET

SURFACE-MOUNT CERAMIC MULTILAYER CAPACITORS

General Purpose & High Capacitance

Class 2, X7R

6.3 V TO 50 V

100 pF to 22 μ F

RoHS compliant & Halogen Free



SCOPE

This specification describes X7R series chip capacitors with lead-free terminations.

APPLICATIONS

PCs, Hard disk, Game PCs

DVDs, Video cameras

Mobile phones

Data processing

FEATURES

Supplied in tape on reel

Nickel-barrier end termination

RoHS compliant

Halogen Free compliant

ORDERING INFORMATION - GLOBAL PART NUMBER, PHYCOMP

CTC & I2NC

All part numbers are identified by the series, size, tolerance, TC material, packing style, voltage, process code, termination and capacitance value.

YAGEO BRAND ordering code

GLOBAL PART NUMBER (PREFERRED)

CC XXXX X X **X7R** X **BB** XXX
 (1) (2) (3) (4) (5)

(1) SIZE – INCH BASED (METRIC)

0201 (0603)

0402 (1005)

0603 (1608)

0805 (2012)

1206 (3216)

1210 (3225)

1812 (4532)

(2) TOLERANCE

J = $\pm 5\%$ ⁽¹⁾

K = $\pm 10\%$

M = $\pm 20\%$

(3) PACKING STYLE

R = Paper/PE taping reel; Reel 7 inch

K = Blister taping reel; Reel 7 inch

P = Paper/PE taping reel; Reel 13 inch

F = Blister taping reel; Reel 13 inch

C = Bulk case

(4) RATED VOLTAGE

5 = 6.3 V

6 = 10 V

7 = 16 V

8 = 25 V

9 = 50 V

(5) CAPACITANCE VALUE

2 significant digits+number of zeros

The 3rd digit signifies the multiplying factor, and letter R is decimal point

Example: 103 = $10 \times 10^3 = 10,000 \text{ pF} = 10 \text{ nF}$

NOTE

1. Tolerance $\pm 5\%$ is not available for full product range, please contact local sales force before ordering

CONSTRUCTION

The capacitor consists of a rectangular block of ceramic dielectric in which a number of interleaved metal electrodes are contained. This structure gives rise to a high capacitance per unit volume.

The inner electrodes are connected to the two end terminations and finally covered with a layer of plated tin (NiSn). The terminations are lead-free. A cross section of the structure is shown in Fig.1.

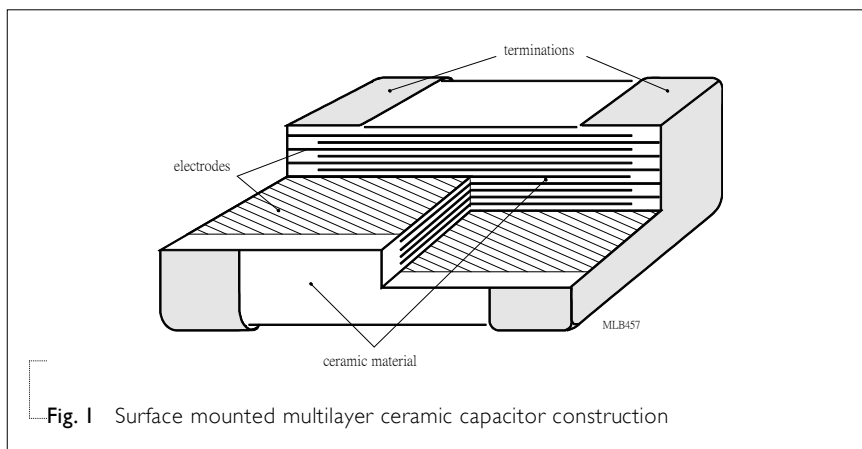


Fig. 1 Surface mounted multilayer ceramic capacitor construction

DIMENSION

Table I For outlines see fig. 2

TYPE	L ₁ (mm)	W (mm)	T (MM)	L ₂ / L ₃ (mm)		L ₄ (mm)
				min.	max.	min.
0201	0.6 ±0.03	0.3 ±0.03	Refer to table 2 to 4	0.10	0.20	0.20
0402	1.0 ±0.05	0.5 ±0.05		0.15	0.30	0.40
0603	1.6 ±0.10 ⁽¹⁾	0.8 ±0.10 ⁽¹⁾		0.20	0.60	0.40
	1.6 ±0.15 ⁽²⁾	0.8 ±0.15 ⁽²⁾				
0805	2.0 ±0.10 ⁽¹⁾	1.25 ±0.10 ⁽¹⁾		0.25	0.75	0.55
	2.0 ±0.20 ⁽²⁾	1.25 ±0.20 ⁽²⁾				
1206	3.2 ±0.15 ⁽¹⁾	1.6 ±0.15 ⁽¹⁾		0.25	0.75	1.40
	3.2 ±0.30 ⁽²⁾	1.6 ±0.20 ⁽²⁾				
1210	3.2 ±0.20 ⁽¹⁾	2.5 ±0.20 ⁽¹⁾		0.25	0.75	1.40
	3.2 ±0.40 ⁽²⁾	2.5 ±0.30 ⁽²⁾				
1812	4.5 ±0.20 ⁽¹⁾	3.2 ±0.20 ⁽¹⁾		0.25	0.75	2.20
	4.5 ±0.40 ⁽²⁾	3.2 ±0.40 ⁽²⁾				

NOTE

1. Dimension for size 0603, C < 2.2 μF; 0805 to 1812, C ≤ 100nF
2. Dimension for size 0603, C = 1 μF; 50V; 0805 to 1812, C > 100 nF

OUTLINES

For dimension see Table I

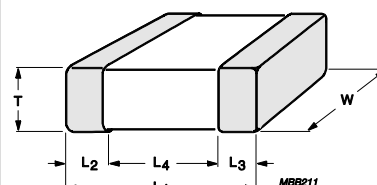


Fig. 2 Surface mounted multilayer ceramic capacitor dimension

CAPACITANCE RANGE & THICKNESS FOR X7R
Table 2 Sizes from 0201 to 0402

CAP.	0201					0402				
	6.3 V	10 V	16 V	25 V	50 V	6.3 V	10 V	16 V	25 V	50 V
100 pF										
150 pF										
220 pF										
330 pF					0.3±0.03					
470 pF										
680 pF										
1.0 nF	0.3±0.03	0.3±0.03	0.3±0.03	0.3±0.03						
1.5 nF										
2.2 nF										0.5±0.05
3.3 nF						0.5±0.05	0.5±0.05	0.5±0.05	0.5±0.05	
4.7 nF										
6.8 nF										
10 nF										
15 nF										
22 nF										
33 nF										
47 nF										
68 nF										
100 nF										0.5±0.05
150 nF										
220 nF						0.5±0.05	0.5±0.05	0.5±0.05		
330 nF										
470 nF						0.5±0.05	0.5±0.05			
680 nF										
1.0 µF						0.5±0.05				
2.2 µF										
4.7 µF										
10 µF										
22 µF										

NOTE

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-6 series is on request
3. For product with 5% tolerance, please contact local sales force before ordering

CAPACITANCE RANGE & THICKNESS FOR X7R
Table 3 Sizes from 0603 to 0805

CAP.	0603					0805				
	6.3 V	10 V	16 V	25 V	50 V	6.3 V	10 V	16 V	25 V	50 V
100 pF										
150 pF										
220 pF										
330 pF										
470 pF										
680 pF										
1.0 nF										
1.5 nF										
2.2 nF						0.6±0.1	0.6±0.1	0.6±0.1	0.6±0.1	0.6±0.1
3.3 nF										
4.7 nF					0.8±0.1					
6.8 nF										
10 nF	0.8±0.1	0.8±0.1	0.8±0.1	0.8±0.1						
15 nF										
22 nF										
33 nF										
47 nF										
68 nF						0.85±0.1	0.85±0.1	0.85±0.1	0.85±0.1	0.85±0.1
100 nF										
150 nF										
220 nF										
330 nF										
470 nF										
680 nF										
1.0 µF					0.8±0.15	1.25±0.2	1.25±0.2	1.25±0.2	1.25±0.2	1.25±0.2
2.2 µF										
4.7 µF										
10 µF										
22 µF										

NOTE

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-6 series is on request
3. For product with 5% tolerance, please contact local sales force before ordering

CAPACITANCE RANGE & THICKNESS FOR X7R
Table 4 Size 1206

CAP.	I206					
	6.3 V	10 V	16 V	25 V	50 V	
100 pF	0.85±0.1	0.85±0.1	0.85±0.1	0.85±0.1		
150 pF						
220 pF						
330 pF						
470 pF						
680 pF						
1.0 nF						
1.5 nF						
2.2 nF						
3.3 nF						
4.7 nF						
6.8 nF						
10 nF						
15 nF						
22 nF						
33 nF						
47 nF						
68 nF						
100 nF						
150 nF						
220 nF						
330 nF						
470 nF						
680 nF						
1.0 µF	1.15±0.1	1.15±0.1	1.15±0.1	1.15±0.1	1.6±0.2	
2.2 µF	1.6±0.2	1.6±0.2	1.6±0.2	1.6±0.2		
4.7 µF						
10 µF						
22 µF						
47 µF						

NOTE

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-6 series is on request
3. For product with 5% tolerance, please contact local sales force before ordering
4. Please contact local sales force for special ordering code before ordering

CAPACITANCE RANGE & THICKNESS FOR X7R
Table 5 Sizes from 1210 to 1812

CAP.	1210 6.3 V	10 V	16 V	25 V	50 V	1812 50 V
100 pF						
150 pF						
220 pF						
330 pF						
470 pF						
680 pF						
1.0 nF						
1.5 nF						
2.2 nF						
3.3 nF						
4.7 nF						
6.8 nF						
10 nF						
15 nF					0.85±0.1	0.85±0.1
22 nF	0.85±0.1	0.85±0.1	0.85±0.1	0.85±0.1		
33 nF						
47 nF						
68 nF						
100 nF						
150 nF						
220 nF					1.15±0.1	1.15±0.1
330 nF						
470 nF	1.15±0.1	1.15±0.1	1.15±0.1	1.15±0.1		
680 nF					1.25±0.2	
1.0 µF	1.25±0.2	1.25±0.2	1.25±0.2	1.25±0.2		1.6±0.2
2.2 µF					1.9±0.2	
4.7 µF	1.9±0.2	1.9±0.2	1.9±0.2	1.9±0.2		
10 µF					2.5±0.3	
22 µF			2.5±0.2	2.5±0.2		
47 µF	2.5±0.2	2.5±0.2				

NOTE

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-6 series is on request
3. For product with 5% tolerance, please contact local sales force before ordering
4. Please contact local sales force for special ordering code before ordering

THICKNESS CLASSES AND PACKING QUANTITY

Table 6

SIZE CODE	THICKNESS CLASSIFICATION	TAPE WIDTH QUANTITY PER REEL	Ø180 MM / 7 INCH		Ø330 MM / 13 INCH		QUANTITY PER BULK CASE
			Paper	Blister	Paper	Blister	
0201	0.3 ±0.03 mm	8 mm	15,000	---	50,000	---	---
0402	0.5 ±0.05 mm	8 mm	10,000	---	50,000	---	50,000
0603	0.8 ±0.1 mm	8 mm	4,000	---	15,000	---	15,000
0805	0.6 ±0.1 mm	8 mm	4,000	---	20,000	---	10,000
	0.85 ±0.1 mm	8 mm	4,000	---	15,000	---	8,000
	1.25 ±0.2 mm	8 mm	---	3,000	---	10,000	5,000
1206	0.6 ±0.1 mm	8 mm	4,000	---	20,000	---	---
	0.85 ±0.1 mm	8 mm	4,000	---	15,000	---	---
	1.00 / 1.15 ±0.1 mm	8 mm	---	3,000	---	10,000	---
	1.25 ±0.2 mm	8 mm	---	3,000	---	10,000	---
	1.6 ±0.15 mm	8 mm	---	2,500	---	10,000	---
	1.6 ±0.2 mm	8 mm	---	2,000	---	8,000	---
1210	0.6 / 0.7 ±0.1 mm	8 mm	---	4,000	---	15,000	---
	0.85 ±0.1 mm	8 mm	---	4,000	---	10,000	---
	1.15 ±0.1 mm	8 mm	---	3,000	---	10,000	---
	1.15 ±0.15 mm	8 mm	---	3,000	---	10,000	---
	1.25 ±0.2 mm	8 mm	---	3,000	---	---	---
	1.5 ±0.1 mm	8 mm	---	2,000	---	---	---
	1.6 / 1.9 ±0.2 mm	8 mm	---	2,000	---	---	---
	2.0 ±0.2 mm	8 mm	---	2,000 1,000	---	---	---
	2.5 ±0.2 mm	8 mm	---	1,000 500	---	---	---
1808	1.15 ±0.15 mm	12 mm	---	3,000	---	---	---
	1.25 ±0.2 mm	12 mm	---	3,000	---	---	---
	1.35 ±0.15 mm	12 mm	---	2,000	---	---	---
	1.5 ±0.1 mm	12 mm	---	2,000	---	---	---
	1.6 ±0.2 mm	12 mm	---	2,000	---	8,000	---
	2.0 ±0.2 mm	12 mm	---	2,000	---	---	---
1812	0.6 / 0.85 ±0.1 mm	12 mm	---	2,000	---	---	---
	1.15 ±0.1 mm	12 mm	---	1,000	---	---	---
	1.25 ±0.2 mm	12 mm	---	1,000	---	---	---
	1.5 ±0.1 mm	12 mm	---	1,000	---	---	---
	1.6 ±0.2 mm	12 mm	---	1,000	---	---	---
	2.0 ±0.2 mm	12 mm	---	1,000	---	---	---
	2.5 ±0.2 mm	12 mm	---	500	---	---	---

ELECTRICAL CHARACTERISTICS**X7R DIELECTRIC CAPACITORS; NISN TERMINATIONS**

Unless otherwise specified, all test and measurements shall be made under standard atmospheric conditions for testing as given in 5.3 of IEC 60068-1:

- Temperature: 15 °C to 35 °C
- Relative humidity: 25% to 75%
- Air pressure: 86 kPa to 106 kPa

Before the measurements are made, the capacitor shall be stored at the measuring temperature for a time sufficient to allow the entire capacitor to reach this temperature.

The period as prescribed for recovery at the end of a test is normally sufficient for this purpose.

Table 7

DESCRIPTION	VALUE			
Capacitance range	100 pF to 47 μ F			
Capacitance tolerance	$\pm 5\%$, $\pm 10\%$, $\pm 20\%$			
Dissipation factor (D.F.)				
≤ 10 V	47pF $\leq$ 0201 $\leq$ 10nF 150pF $\leq$ 0805 $\leq$ 2.2 μ F Exception: 220nF $\leq$ 0402 $\leq$ 470nF 1206 $\geq$ 4.7 μ F 0402 = 1 μ F	100pF $\leq$ 0402 $\leq$ 100nF 220 pF $\leq$ 1206 $\leq$ 2.2 μ F 0603 = 2.2 μ F 4.7 μ F $\leq$ 1210 $\leq$ 47 μ F	100pF $\leq$ 0603 $\leq$ 1 μ F 2.2nF $\leq$ 1210 $\leq$ 2.2 μ F 0805 $\geq$ 4.7 μ F 1210 $\geq$ 12 nF	$\leq 5\%$ $\leq 10\%$ $\leq 12.5\%$
16 V	47 pF $\leq$ 0201 $\leq$ 1.2nF 150 pF $\leq$ 0805 $\leq$ 560nF Exception: 1.5 nF $\leq$ 0201 $\leq$ 10nF 1206 = 2.2 μ F 0402 = 220 nF 1210 = 22 μ F	100 pF $\leq$ 0402 $\leq$ 22nF 220pF $\leq$ 1206 $\leq$ 1 μ F 27nF $\leq$ 0402 $\leq$ 100nF 2.2 μ F $\leq$ 1210 $\leq$ 10 μ F 4.7 μ F $\leq$ 0805 $\leq$ 10 μ F	100 pF $\leq$ 0603 $\leq$ 470nF 2.2nF $\leq$ 1210 $\leq$ 1 μ F 680 nF $\leq$ 0805 $\leq$ 2.2 μ F 470 nF $\leq$ 0603 $\leq$ 1 μ F 4.7 μ F $\leq$ 1206 $\leq$ 10 μ F	$\leq 3.5\%$ $\leq 5\%$ $\leq 10\%$
25 V	47pF $\leq$ 0201 $\leq$ 470pF 150pF $\leq$ 0805 $\leq$ 180nF Exception: 12 nF $\leq$ 0402 $\leq$ 47nF 1206 = 1 μ F 560pF $\leq$ 0201 $\leq$ 10nF 1206 = 2.2 μ F 270nF $\leq$ 0603 $\leq$ 1 μ F 1210 $\geq$ 22 μ F	100pF $\leq$ 0402 $\leq$ 10nF 220pF $\leq$ 1206 $\leq$ 680nF 47nF $\leq$ 0603 $\leq$ 220nF 56 nF $\leq$ 0402 $\leq$ 100 nF 2.2 μ F $\leq$ 1210 $\leq$ 10 μ F 2.2 μ F $\leq$ 0805 $\leq$ 4.7 μ F	100pF $\leq$ 0603 $\leq$ 39nF 2.2nF $\leq$ 1210 $\leq$ 1 μ F 220nF $\leq$ 0805 $\leq$ 560 nF 680nF $\leq$ 0805 $\leq$ 1 μ F 1206 $\geq$ 4.7 μ F	$\leq 2.5\%$ $\leq 3.5\%$ $\leq 5\%$ $\leq 10\%$
≥ 50 V	Exception: 0201 $\geq$ 47pF 0603 $\geq$ 47nF 0402 = 100nF 0603 $\geq$ 1 μ F 1210 $\geq$ 2.2 μ F	1 μ F $\geq$ 1206 $\geq$ 680nF 47nF $\geq$ 0402 $\geq$ 12 nF 0805 = 680 nF 0805 $\geq$ 1 μ F	470nF $\geq$ 0805 $\geq$ 330 nF	$\leq 2.5\%$ $\leq 3.5\%$ $\leq 3.0\%$ $\leq 5\%$ $\leq 10\%$

Insulation resistance after 1 minute at U_r (DC)

$R_{ins} \geq 10$ G Ω or $R_{ins} \times C_r \geq 500(100)$ seconds whichever is less

Maximum capacitance change as a function of temperature

(temperature characteristic/coefficient):

$\pm 15\%$

Operating temperature range:

-55 °C to $+125$ °C



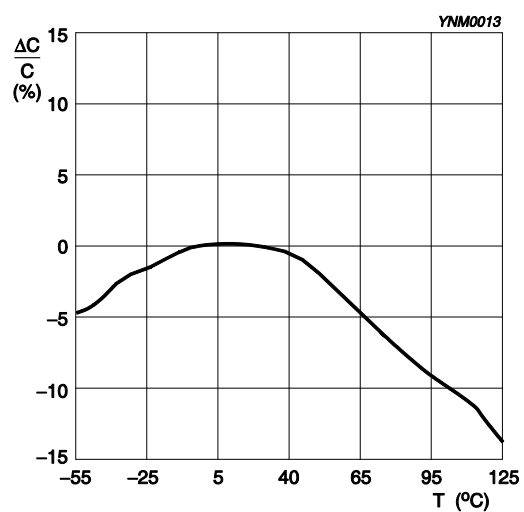


Fig. 3 Typical capacitance change as a function of temperature

Size 0201 10 nF / 16 V
Solid lines: Impedance / Dotted lines: ESR

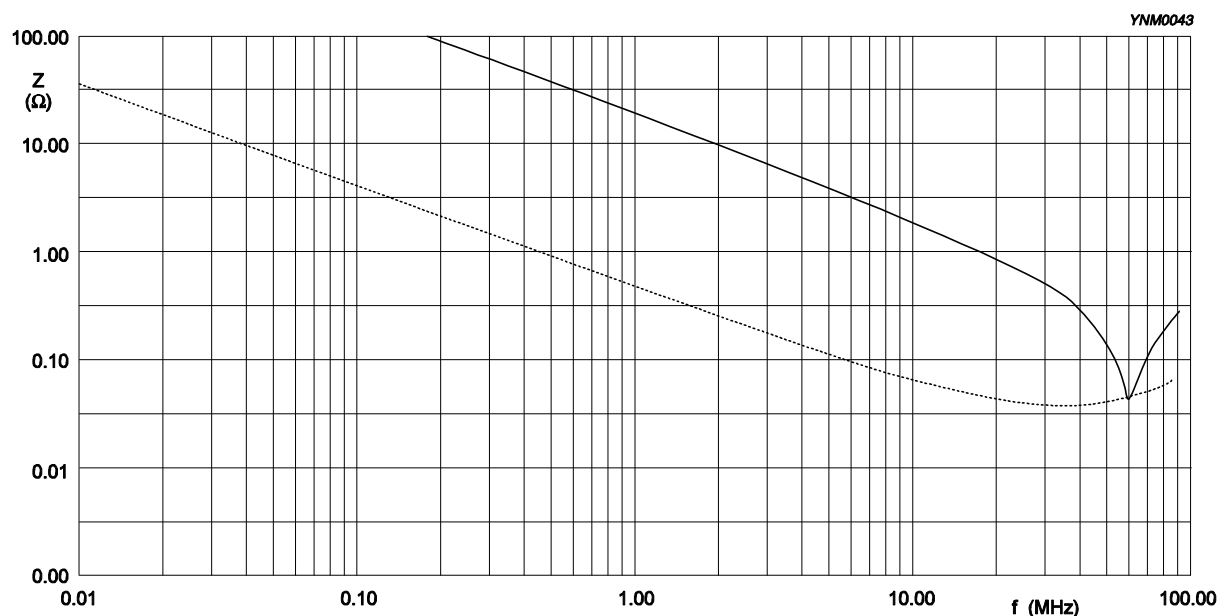


Fig. 4 Impedance ESR vs. frequency characteristics for multilayer chip capacitors

Size 0402 100 nF / 16 V
Solid lines: Impedance / Dotted lines: ESR

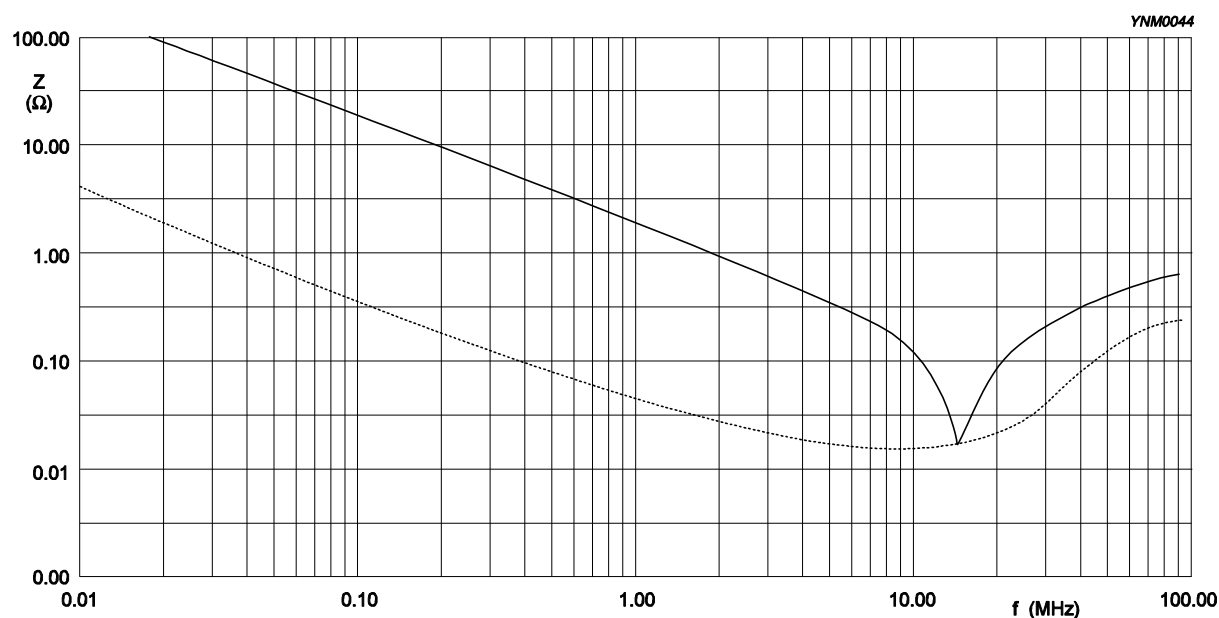


Fig. 5 Impedance ESR vs. frequency characteristics for multilayer chip capacitors

Size 0603 1 μF / 16 V
 Solid lines: Impedance / Dotted lines: ESR

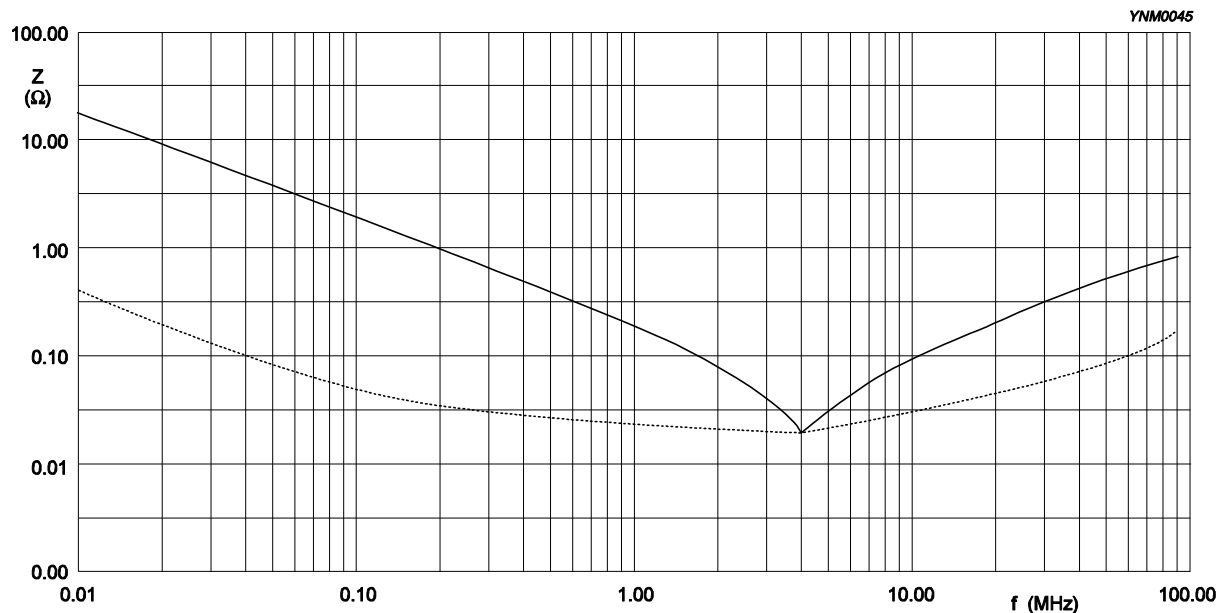


Fig. 6 Impedance ESR vs. frequency characteristics for multilayer chip capacitors

Size 0805 1 μF / 16 V
 Solid lines: Impedance / Dotted lines: ESR

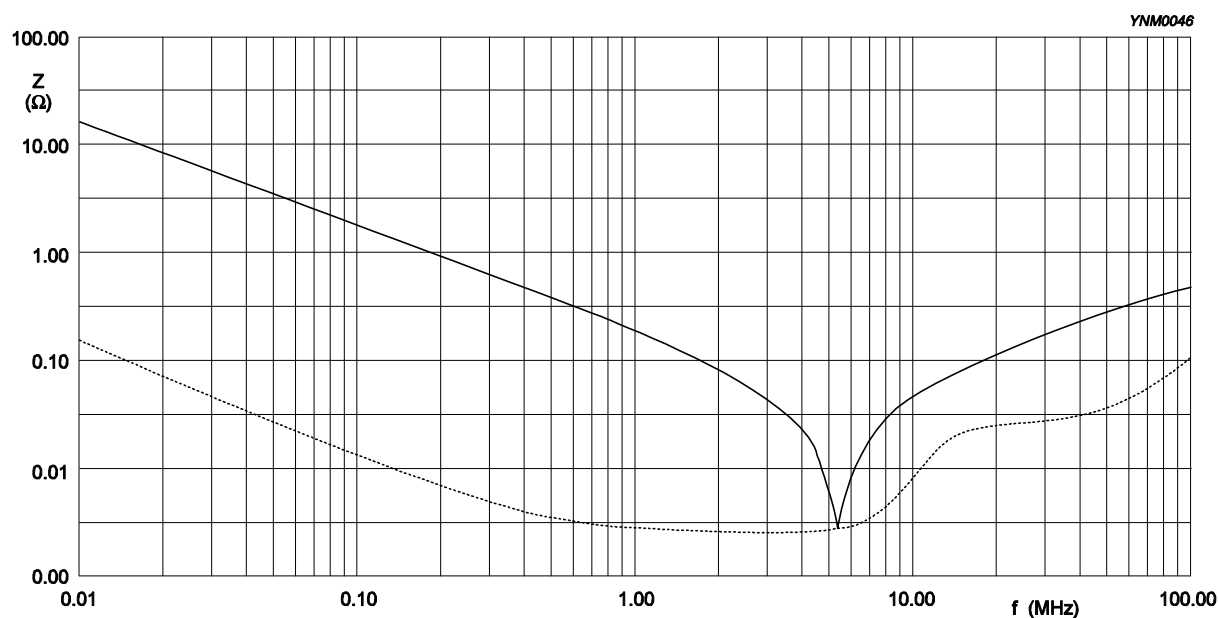


Fig. 7 Impedance ESR vs. frequency characteristics for multilayer chip capacitors

Size 1206 1 μF / 25 V
Solid lines: Impedance / Dotted lines: ESR

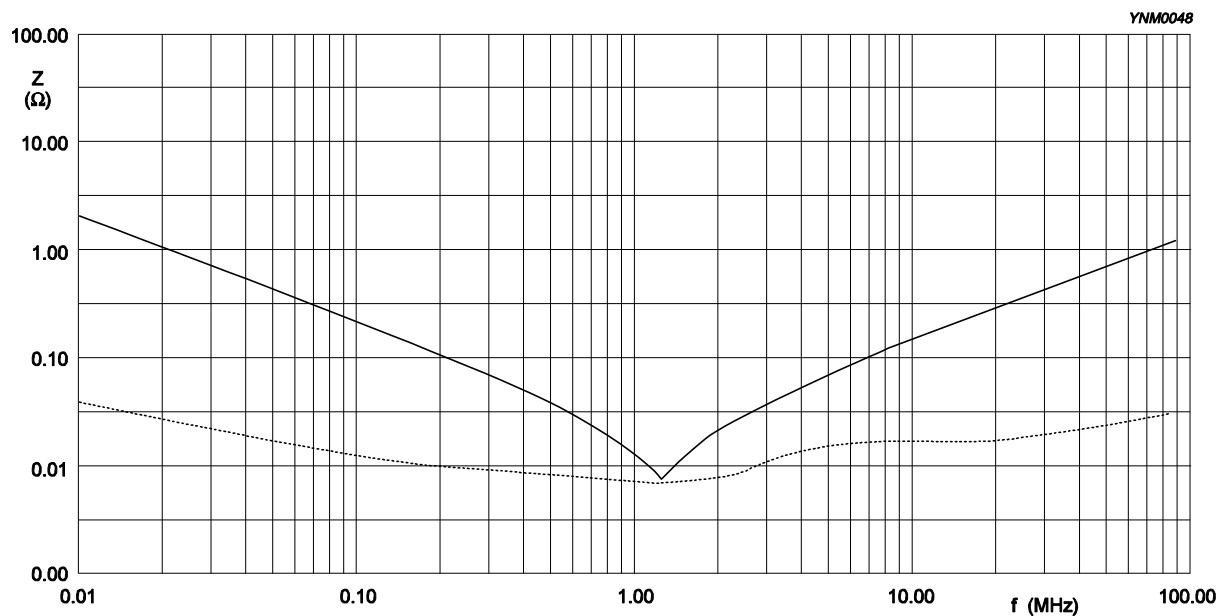


Fig. 8 Impedance ESR vs. frequency characteristics for multilayer chip capacitors

Size 1206 10 μF / 10 V
Solid lines: Impedance / Dotted lines: ESR

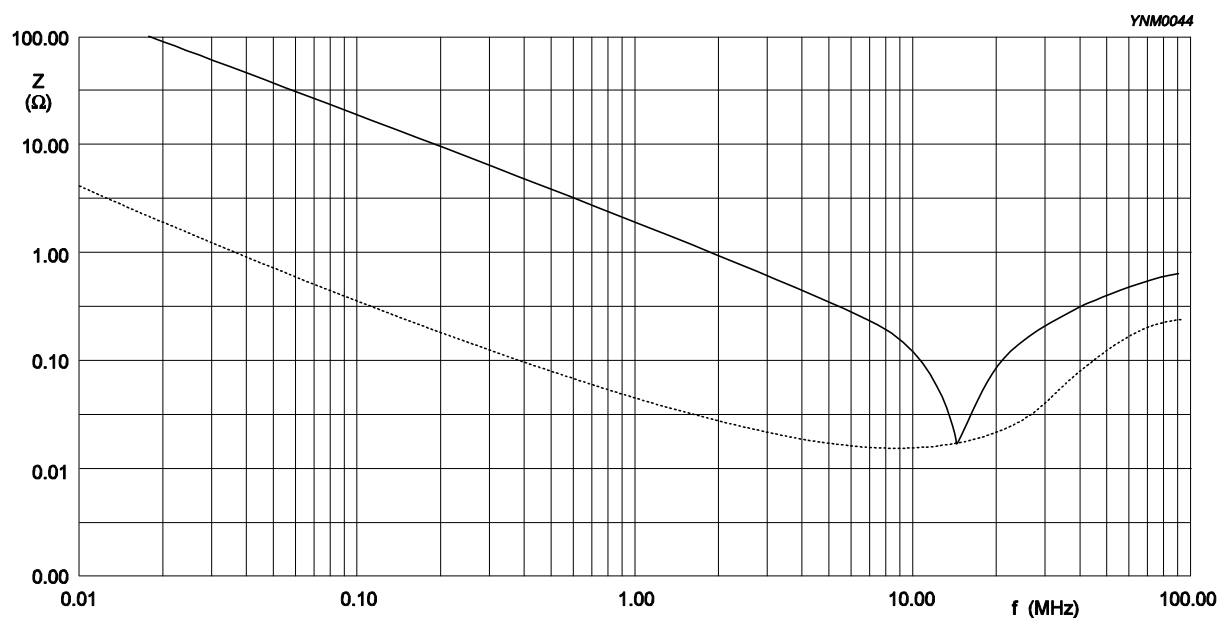


Fig. 9 Impedance ESR vs. frequency characteristics for multilayer chip capacitors

SOLDERING RECOMMENDATION

Table 8

SOLDERING METHOD	SIZE 0402	0603	0805	1206	≥ 1210
Reflow	≥ 0.1 μ F	≥ 1.0 μ F	≥ 2.2 μ F	≥ 4.7 μ F	Reflow only
Reflow/Wave	< 0.1 μ F	< 1.0 μ F	< 2.2 μ F	< 4.7 μ F	---

TESTS AND REQUIREMENTS

Table 9 Test procedures and requirements

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Mounting	IEC 60384-21/22 4.3	The capacitors may be mounted on printed-circuit boards or ceramic substrates	No visible damage
Visual Inspection and Dimension Check	4.4	Any applicable method using $\times 10$ magnification	In accordance with specification
Capacitance ⁽¹⁾	4.5.1	Class 2: At 20 °C, 24 hrs after annealing $f = 1$ KHz for $C \leq 10 \mu$ F, rated voltage > 6.3 V, measuring at voltage $1 V_{rms}$ at 20 °C $f = 1$ KHz, for $C \leq 10 \mu$ F, rated voltage ≤ 6.3 V, measuring at voltage $0.5 V_{rms}$ at 20 °C $f = 120$ Hz for $C > 10 \mu$ F, measuring at voltage $0.5 V_{rms}$ at 20 °C	Within specified tolerance
Dissipation Factor (D.F.) ⁽¹⁾	4.5.2	Class 2: At 20 °C, 24 hrs after annealing $f = 1$ KHz for $C \leq 10 \mu$ F, rated voltage > 6.3 V, measuring at voltage $1 V_{rms}$ at 20 °C $f = 1$ KHz, for $C \leq 10 \mu$ F, rated voltage ≤ 6.3 V, measuring at voltage $0.5 V_{rms}$ at 20 °C $f = 120$ Hz for $C > 10 \mu$ F, measuring at voltage $0.5 V_{rms}$ at 20 °C	In accordance with specification
Insulation Resistance	4.5.3	At U_r (DC) for 1 minute	In accordance with specification

NOTE:

I. For individual product specification, please contact local sales.

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS												
Temperature Characteristic	IEC 60384-21/224.6	Capacitance shall be measured by the steps shown in the following table. The capacitance change should be measured after 5 min at each specified temperature stage. <table><tr><th>Step</th><th>Temperature(°C)</th></tr><tr><td>a</td><td>25±2</td></tr><tr><td>b</td><td>Lower temperature±3°C</td></tr><tr><td>c</td><td>25±2</td></tr><tr><td>d</td><td>Upper Temperature±2°C</td></tr><tr><td>e</td><td>25±2</td></tr></table> (1) Class I Temperature Coefficient shall be calculated from the formula as below $\text{Temp, Coefficient} = \frac{C2 - C1}{C1 \times \Delta T} \times 10^6 \text{ [ppm/°C]}$ C1: Capacitance at step c C2: Capacitance at 125°C ΔT: 100°C(=125°C-25°C) (2) Class II Capacitance Change shall be calculated from the formula as below $\Delta C = \frac{C2 - C1}{C1} \times 100\%$ C1: Capacitance at step c C2: Capacitance at step b or d	Step	Temperature(°C)	a	25±2	b	Lower temperature±3°C	c	25±2	d	Upper Temperature±2°C	e	25±2	<General purpose series> Class1: Δ C/C: ±30ppm Class2: X7R: Δ C/C: ±15% Y5V: Δ C/C: 22~-82% <High Capacitance series> Class2: X7R/X5R: Δ C/C: ±15% Y5V: Δ C/C: 22~-82%
Step	Temperature(°C)														
a	25±2														
b	Lower temperature±3°C														
c	25±2														
d	Upper Temperature±2°C														
e	25±2														
Adhesion	4.7	A force applied for 10 seconds to the line joining the terminations and in a plane parallel to the substrate	Force size ≥ 0603: 5N size = 0402: 2.5N size = 0201: 1N												
Bond Strength	4.8	Mounting in accordance with IEC 60384-22 paragraph 4.3 Conditions: bending 1 mm at a rate of 1 mm/s, radius jig 340 mm	No visible damage <General Purpose series> ΔC/C Class2: X7R: ±10% <High Capacitance series> ΔC/C Class2: X7R: ±10%												

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Resistance to Soldering Heat	4.9	Precondition: 150 +0/-10 °C for 1 hour, then keep for 24 ± 1 hours at room temperature Preheating: for size ≤ 1206: 120 °C to 150 °C for 1 minute Preheating: for size > 1206: 100 °C to 120 °C for 1 minute and 170 °C to 200 °C for 1 minute Solder bath temperature: 260 ± 5 °C Dipping time: 10 ± 0.5 seconds Recovery time: 24 ± 2 hours	Dissolution of the end face plating shall not exceed 25% of the length of the edge concerned <General Purpose series> ΔC/C Class2: X7R: ± 10% <High Capacitance series> ΔC/C Class2: X7R: ± 10% D.F. within initial specified value R_{ins} within initial specified value
Solderability	IEC 60384-21/22 4.10	Preheated to a temperature of 80 °C to 140 °C and maintained for 30 seconds to 60 seconds. Test conditions for lead containing solder alloy Temperature: 235 ± 5 °C Dipping time: 2 ± 0.2 seconds Depth of immersion: 10 mm Alloy Composition: 60/40 Sn/Pb Number of immersions: 1 Test conditions for lead-free containing solder alloy Temperature: 245 ± 5 °C Dipping time: 3 ± 0.3 seconds Depth of immersion: 10 mm Alloy Composition: SAC305 Number of immersions: 1	The solder should cover over 95% of the critical area of each termination
Rapid Change of Temperature	4.11	Preconditioning: 150 +0/-10 °C for 1 hour, then keep for 24 ± 1 hours at room temperature 5 cycles with following detail: 30 minutes at lower category temperature 30 minutes at upper category temperature Recovery time 24 ± 2 hours	No visual damage <General Purpose series> ΔC/C Class2: X7R: ± 15% <High Capacitance series> ΔC/C Class2: X7R: ± 15% D.F. meet initial specified value R_{ins} meet initial specified value

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Damp Heat with U_r Load	IEC 60384- 21/22 4.13	- Preconditioning, class 2 only: 150 $\pm$ 0/-10 $^{\circ}$C /1 hour, then keep for 24 $\pm$ 1 hour at room temp - Initial measure: Spec: refer to initial spec C, D, IR - Damp heat test: 500 $\pm$ 12 hours at 40 $\pm$ 2 $^{\circ}$C; 90 to 95% R.H. 1.0 U_r applied - Recovery: Class 2: 24 $\pm$ 2 hours - Final measure: C, D, IR P.S. If the capacitance value is less than the minimum value permitted, then after the other measurements have been made the capacitor shall be preconditioned according to "IEC 60384 4.1" and then the requirement shall be met.	No visual damage after recovery <General Purpose series> $\Delta C/C$ Class2: X7R: $\pm$ 15% D.F. Class2: X7R: $\leq$ 16V: $\leq$ 7% $\geq$ 25V: $\leq$ 5% R_{ins} Class2: X7R: $\geq$ 500 MΩ or $R_{ins} \times C_r \geq$ 25s whichever is less <High Capacitance series> $\Delta C/C$ Class2: X7R: $\pm$ 20% D.F. Class2: X7R: 2 $\times$ initial value max R_{ins} Class2: X7R: 500 MΩ or $R_{ins} \times C_r \geq$ 25s whichever is less

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Endurance	IEC 60384-21/22 4.14	1. Preconditioning, class 2 only: 150 +0/-10 °C /1 hour, then keep for 24 ±1 hour at room temp 2. Initial measure: Spec: refer to initial spec C, D, IR 3. Endurance test: Temperature: X7R: 125 °C Specified stress voltage applied for 1,000 hours: Applied $2.0 \times U_r$ for general products Applied $1.5(1.0) \times U_r$ for high cap. products 4. Recovery time: 24 ±2 hours 5. Final measure: C, D, IR P.S. If the capacitance value is less than the minimum value permitted, then after the other measurements have been made the capacitor shall be preconditioned according to "IEC 60384 4.1" and then the requirement shall be met.	No visual damage <General Purpose series> $\Delta C/C$ Class2: X7R: $\pm 15\%$ D.F. Class2: X7R: $\leq 16V: \leq 7\%$ $\geq 25V: \leq 5\%$ R_{ins} Class2: X7R: $\geq 1,000 M\Omega$ or $R_{ins} \times C_r \geq 50s$ whichever is less <High Capacitance series> $\Delta C/C$ Class 2: X7R: $\pm 20\%$ D.F. Class 2: X7R: $2 \times \text{initial value max}$ R_{ins} Class 2: X7R: $1,000 M\Omega$ or $R_{ins} \times C_r \geq 50(10)s$ whichever is less
Voltage Proof	IEC 60384-1 4.6	Specified stress voltage applied for 1~5 seconds $U_r \leq 100 V$: series applied $2.5 U_r$ Charge/Discharge current is less than 50 mA	No breakdown or flashover

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 10	Jul. 08, 2014	-	- Dimension updated
Version 9	Aug. 19, 2013	-	- Dimension updated
Version 8	Oct 13, 2011	-	- Dimension updated
Version 7	Jan 13, 2011	-	- Dimension updated
Version 6	Oct 13, 2010	-	- Rated voltage of 0201 extend to 50 V - Capacitance range of 0201 X7R 6.3V to 16V extend to 100 pF - Capacitance range of 0805 X7R 10V extend to 10 μF - Capacitance range of 0805 X7R 50V extend to 1 μF - Capacitance range of 1210 X7R 10V extend to 22 μF - Figures of impedance ESR updated
Version 5	Jul 27, 2010	-	- Dimension on 0603 and 1206 case size updated
Version 4	Apr 21, 2010	-	- The statement of "Halogen Free" on the cover added - Dimension updated
Version 3	Oct 26, 2009	-	- Capacitance range of 0402 X7R 25 V extend to 100 nF
Version 2	May 11, 2009	-	- Product range updated
Version 1	Apr 24, 2009	-	- Ordering code updated
Version 0	Apr 15, 2009	-	- New datasheet for general purpose and high capacitance X7R series with RoHS compliant - Replace the "6.3V to 50V" part of pdf files: X7R_10V_9, X7R_16V-to-100V_9, X7R_16-to-500V_9, UP-X5R_X7R_HighCaps_6.3-to-25V_11, UY-X5R_X7R_HighCaps_6.3-to-25V_11 - Combine 0201 from pdf files: UP-NP0X5RX7RY5V_0201_6.3-to-50V_2 and UY-NPOX5RX7RY5V_0201_6.3-to-50V_2 - Define global part number - Description of "Halogen Free compliant" added - Test method and procedure updated

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Yageo:

CC0603JPX7R9BB103	CC0603KPX7R9BB103	CC0603KPX7R7BB104	CC0603KPX7R9BB102
CC0603KPX7R9BB472	CC0603KPX7R9BB471	CC0805KPX7R9BB104	CC0805KRX7R7BB474
CC0603JPX7R9BB102	CC0603JPX7R9BB222	CC0603KPX7R7BB473	CC0603KPX7R8BB223
CC0603KPX7R8BB473	CC0603KPX7R9BB101	CC0603KPX7R9BB183	CC0603KPX7R9BB222
CC0603KPX7R9BB223	CC0603KPX7R9BB473	CC0805JPX7R9BB104	CC0805JPX7R9BB153
CC0805JPX7R9BB223	CC0805KFX7R6BB105	CC0805KFX7R7BB105	CC0805KFX7R7BB474
CC0805KFX7R8BB105	CC0805KPX7R7BB154	CC0805KPX7R8BB104	CC0805KPX7R8BB224
CC0805KPX7R9BB102	CC0805KPX7R9BB103	CC0805KPX7R9BB222	CC0805KPX7R9BB223
CC0805KPX7R9BB333	CC0805KPX7R9BB472	CC0805KPX7R9BB473	CC1206KKX7R6BB475
CC0603KPX7R7BB105	CC0603KPX7R8BB104	CC0603KPX7R9BB332	CC0603KPX7R9BB333
CC0603JRX7R7BB823	CC0805KFX7R7BB334	CC0805KRX7R6BB474	CC0805KRX7R9BB224
CC1206KKX7R9BB225	CC1210JFX7R9BB224	CC0201KRX7R8BB152	CC0402KRX7R9BB104
CC0603KRX7R7BB681	CC0402KRX7R6BB222	CC0201KRX7R9BB102	CC1210KFX7R9BB224
CC0805JRX7R9BB122	CC0805JKX7R9BB474	CC0603KRX7R8BB562	CC0805JRX7R9BB202
CC0603JRX7R7BB102	CC0603JRX7R6BB105	CC0603KRX7R9BB431	CC0603KRX7R9BB474
CC0603KRX7R9BB154	CC0603JRX7R9BB181	CC0805KKX7R9BB274	CC0805KKX7R9BB684
CC0603JRX7R7BB103	CC0603KRX7R9BB361	CC0603JRX7R8BB123	CC0603JRX7R9BB224
CC0603JRX7R9BB151	CC1206JRX7R8BB104	CC0805JRX7R9BB681	CC1812JKX7R9BB154
CC1210KKX7R9BB103	CC1210KKX7R9BB225	CC1210KKX7R9BB333	CC0402JRX7R9BB473
CC1210JKX7R9BB105	CC0805KRX7R8BB123	CC0402KRX7R5BB224	CC0402KRX7R7BB471
CC0603KRX7R7BB394	CC1206JKX7R9BB184	CC0805JRX7R9BB391	CC0805KRX7R5BB104
CC0603JRX7R7BB154	CC0603KRX7R5BB224	CC1210KKX7R9BB684	CC0402KRX7R8BB224
CC0603MRX7R9BB223	CC1206KKX7R7BB824	CC0805KKX7R7BB106	CC2220JKX7R9BB105
CC0805KRX7R7BB103	CC0805JKX7R9BB105	CC0805KKX7R6BB334	CC0603KRX7R7BB225
CC0402KRX7R9BB123	CC0805KRX7R6BB104	CC0201KRX7R7BB101	CC0805JRX7R9BB393