THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	J1	REVISED PER ECO-08-009182	22APR08	DH	AS

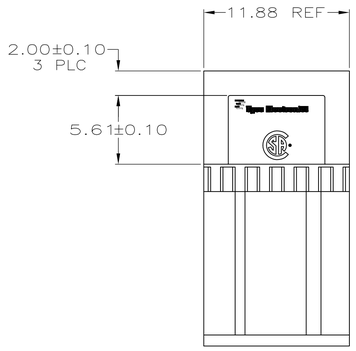



DETAIL Z
SCALE 20:1

1. HOUSINGS MATERIAL: LIQUID CRYSTAL POLYMER.
2. CONTACT MATERIAL: COPPER ALLOY
3. CONTACT FINISH:
   UNDERPLATE (ENTIRE CONTACT):
   0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
   ON MATING SURFACES:
   FLASH GOLD PER ASTM B 488, OVER
   0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR
   0.00076 MIN GOLD PER ASTM B 488 OVER UNDERPLATE.
   ON LEADS:
   0.00127 MIN TIN-LEAD OVER UNDERPLATE.
   LUBRICATION (MIN MATING SURFACES):
   SURFACE CONDITIONER AFTER PLATING.

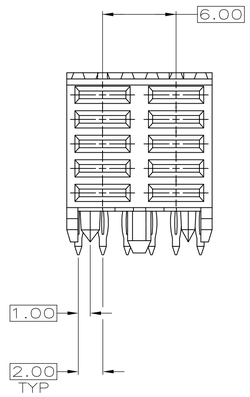

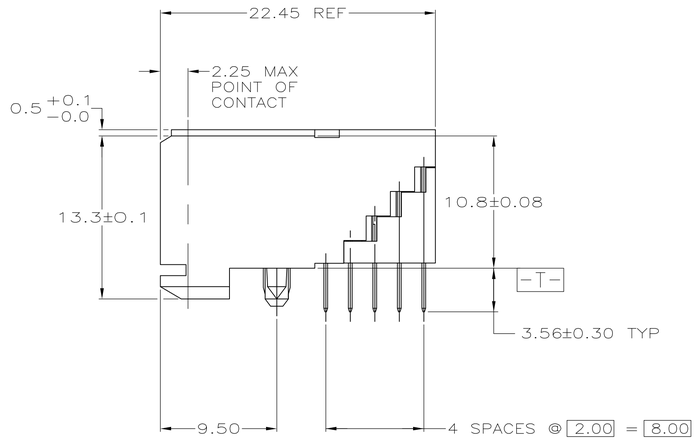

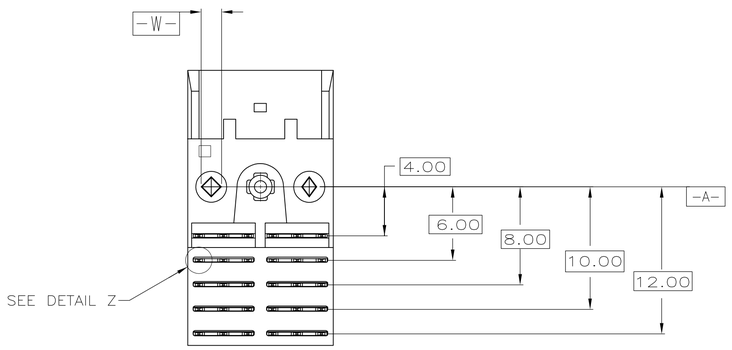

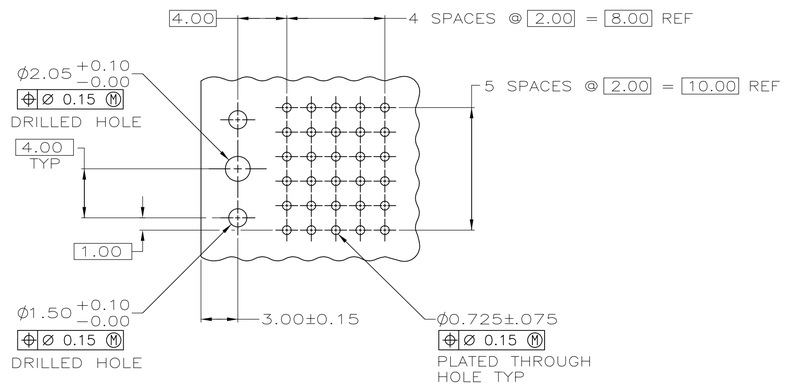

RECOMMENDED CURCUIT PATTERN
PER IPC-D300 TYPE II, CLASS C
(COMPONENT SIDE)

3	536676-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 1 2
FINISH 3

DWN T. SHUEY 5-29-98
CHK D. KOVALICK 6-2-98
APVD D. KOVALICK 6-2-98 NAME

PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

Tyco Electronics Corporation
P.O. Box 3608
Harrisburg, PA 17105-3608

RCPT ASSEMBLY,POWER,Z PACK 2mm FB, R/A,5 ROW,10 POSN,W/TAIL ORGANIZER

SIZE A1 CAGE CODE 00779 DRAWING NO C-536676 RESTRICTED TO —

CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV J1

OBSOLETE
NOT the LATEST
REVISION