




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		J3	REVISED PER ECO-13-004580	26APR13	KH	JO

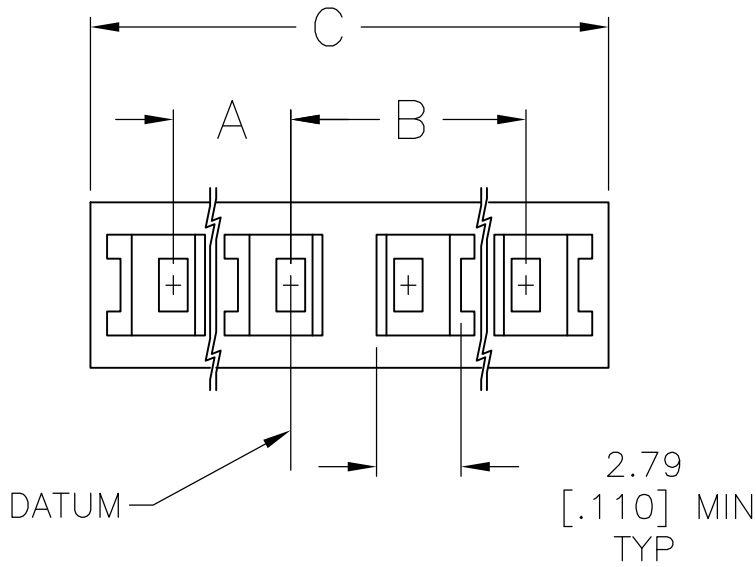




TOP VIEW

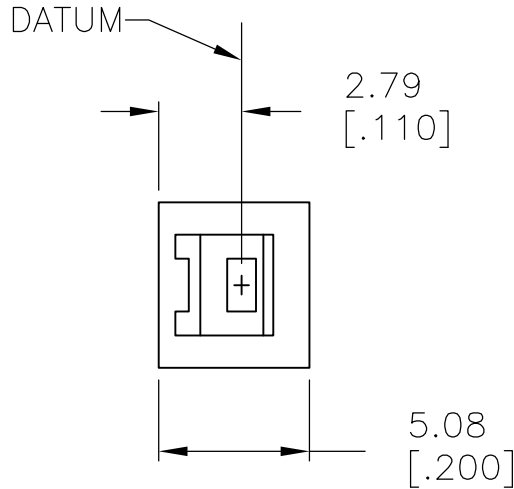

DETAIL X

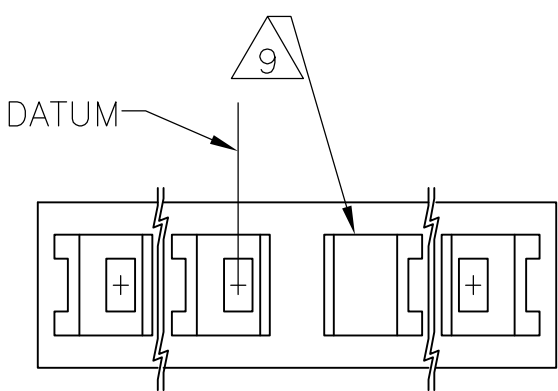

DETAIL Y

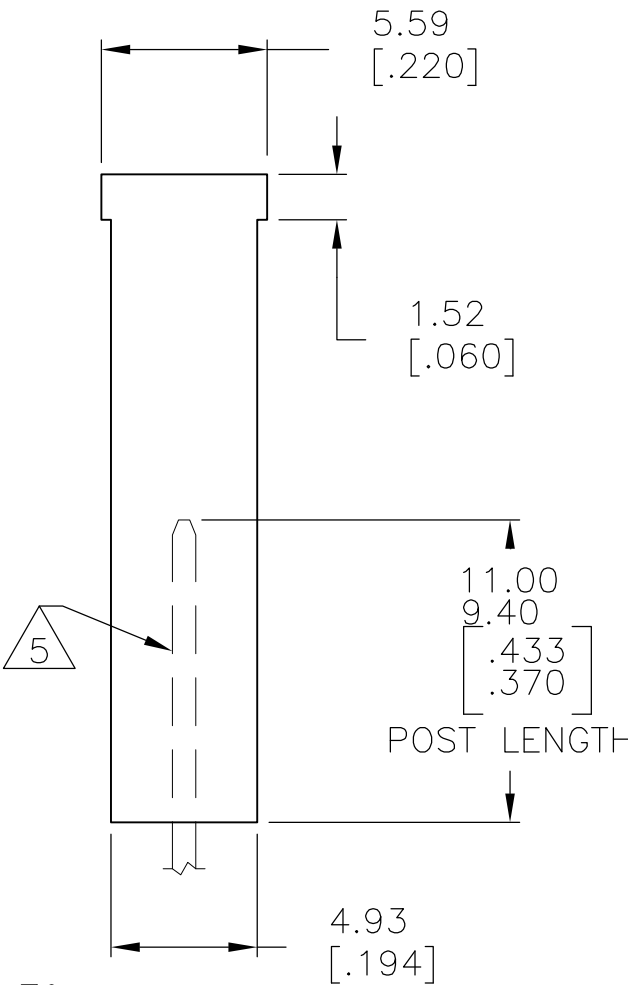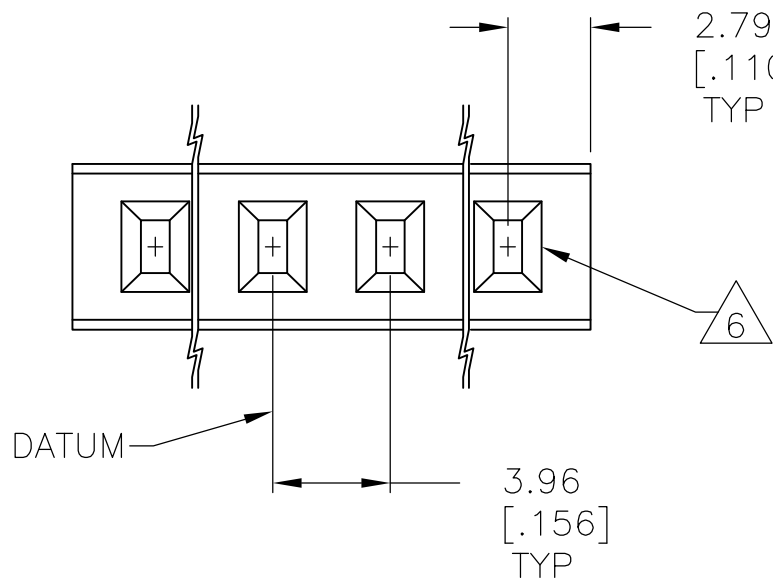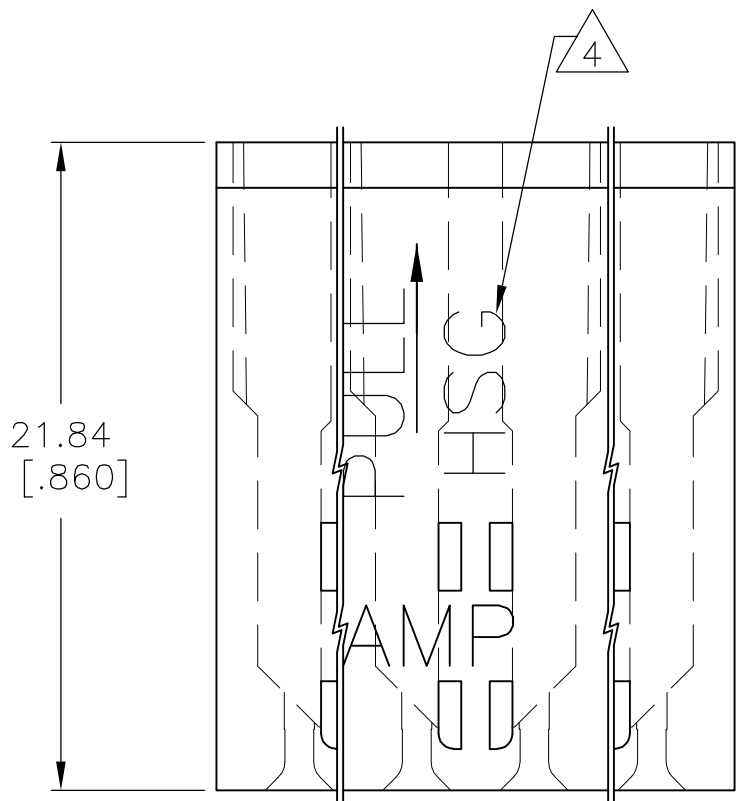

OBSOLETE	□□□□□□□□□□	53.14 [2.092]	23.77 [.936]	23.77 [.936]	13	1-87270-8
OBSOLETE	□□□□□□□□□□	45.21 [1.780]	19.81 [.780]	19.81 [.780]	11	1-87270-7
	□□□□□□□□	37.29 [1.468]	15.85 [.624]	15.85 [.624]	9	1-87270-6
	□□□□□□□	29.36 [1.156]	11.89 [.468]	11.89 [.468]	7	1-87270-5
	□□□□□□	21.44 [.844]	7.92 [.312]	7.92 [.312]	5	1-87270-4
	□□□□□	13.51 [.532]	3.96 [.156]	3.96 [.156]	3	1-87270-3
	□□□□□□□□□□	25.40 [1.000]	11.89 [.468]	7.92 [.312]	5 OF 6	1-87270-2
OBSOLETE	□□□□□□□□□□	29.36 [1.156]	11.89 [.468]	11.89 [.468]	6 OF 7	1-87270-1
	□□□□□□□□□□	21.44 [.844]	7.92 [.312]	7.92 [.312]	4 OF 5	1-87270-0
	□□□□□□□□□□	57.10 [2.248]	27.74 [1.092]	23.77 [.963]	14	87270-9
	□□□□□□□□□□	49.17 [1.936]	23.77 [.936]	19.81 [.780]	12	87270-8
	□□□□□□□□□□	41.25 [1.624]	19.81 [.780]	15.85 [.624]	10	87270-7
	□□□□□□□□□□	33.32 [1.312]	15.85 [.624]	11.89 [.468]	8	87270-6
	□□□□□□□□□□	25.40 [1.000]	11.89 [.468]	7.92 [.312]	6	87270-5
	□□□□□□□□□□	17.48 [.688]	7.92 [.312]	3.96 [.156]	4	87270-4
	□□□□□□□□□□	17.48 [.688]	7.92 [.312]	3.96 [.156]	3 OF 4	87270-3
	□□□□□□□□□□	9.55 [.376]	-	-	2	87270-2
	□□□□□□□□□□	5.08 [.200]	-	-	1	87270-1

CAVITY ORIENTATION CHART

- PULL ON HOUSING TO REMOVE FROM POSTS. DO NOT CONFINE THE CONDUCTORS OR PULL ON THE CONDUCTORS DURING REMOVAL ACTION.
 - IN ORDER FOR THIS HOUSING TO FUNCTION PROPERLY AS A CONNECTOR, THE CONTACTS (P/N 87278 SERIES) MUST BE CRIMPED ACCORDING TO AMP SPEC 114-25008.
- 4 MOLDED CHARACTERS THIS END.
- 5 .79[.031] X 1.57[.062] POST SHOWN FOR REFERENCE ONLY.
- 6 CAVITY ACCEPTS 0.79[.031] X 1.57[.062] POST (TYPICAL).
- 7 BOLD CAVITY INDICATES TYPICAL DATUM.
- 8 THIS VIEW TO BE REFERENCED WITH CAVITY ORIENTATION CHART.
- 9 NO POST ENTREE HOLE IN THIS LOCATION.
- 10 SEE DETAIL X.
- 11 SEE DETAIL Y.
- 12 OBSOLETE PART NUMBER.
- 13 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI