



Trash receptacle with liner
Receptacle sold separately

Item No.	Size (in.) W x L	Gallon Size
37822	26" x 26"	10
37823	36" x 40"	36

Dimensional tolerances are $\pm 1/4$ " unless specified.
Packaged 50 per pack

RoHS, REACH and Conflict Minerals Statement

See the Desco Industries RoHS, Reach and Conflict Minerals Statement:
<http://www.descoindustries.com/ROHS3.aspx>

See the Protektive Pak Limited Warranty:
<http://protektivepak.descoindustries.com/Limited-Warranty.aspx>

Description

Protektive Pak Pink Poly Trash Receptacle Liners are made from light pink transparent low density polyethylene, and include an antistat that is integral to the film material. These liners have low charging (antistatic) properties so that electrostatic charges are removed to ground when a liner is grounded. The Liners are ideal for use in ESD protected areas, and are available in two sizes: 10 and 36 gallons. Protektive Pak Pink Poly Trash Receptacle Liners meet ANSI/ESD S20.20 and ANSI/ESD S541 requirements.

"It should be understood that any object, item, material or person could be a source of static electricity in the work environment. Removal of unnecessary nonconductors, replacing nonconductive materials with dissipative or conductive materials and grounding all conductors are the principle methods of controlling static electricity in the workplace, regardless of the activity." [ESD Handbook ESD TR20.20-2008 section 2.4 Sources of Static Electricity]

Specifications

Electrical Properties

Static Decay
Surface Resistance
Polycarbonate Haze
Corrosivity Observations

Typical Values

< 1.0 sec.
 1×10^4 to $< 1 \times 10^{13}$ ohms
NE
NE

Test Procedures/Method

ASTM 101 Method 4046
ANSI/ESD STM11.11
72 hr contact
MIL-STD-3010, M3005

Physical Properties

Thickness

2 mil (.002") nominal, $\pm 10\%$

Melt Index

0.050 gm/10 min

Density

0.923 gm/cc

Dart Impact

230 gms

Coefficient of Friction

MD 24,000 psi

1% Secant modulus (Stiffness)

MD 25,000 psi


ASTM D-1238

ASTM D-1505

ASTM D-1709

ASTM D-1894 (unmodified film)

ASTM D-882

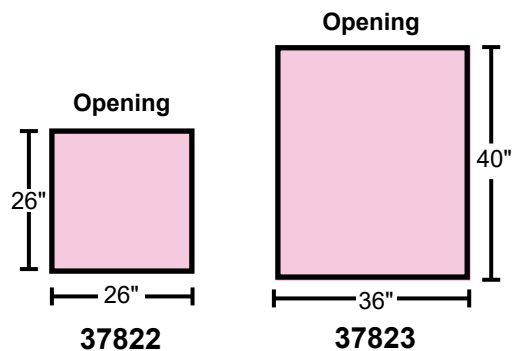

Made in the
United States of America

Specifications and procedures subject to change without notice

Unless otherwise noted, tolerance is $\pm 10\%$

TRASH RECEPTACLE LINER, PINK POLY

PROTEKTIVE PAK

PROTEKTIVE PAK
13520 MONTE VISTA AVENUE, CHINO, CA 91710
PHONE (909) 627-2578
ProtektivePak.com

DRAWING NUMBER
37822

DATE:
October
2018