




COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

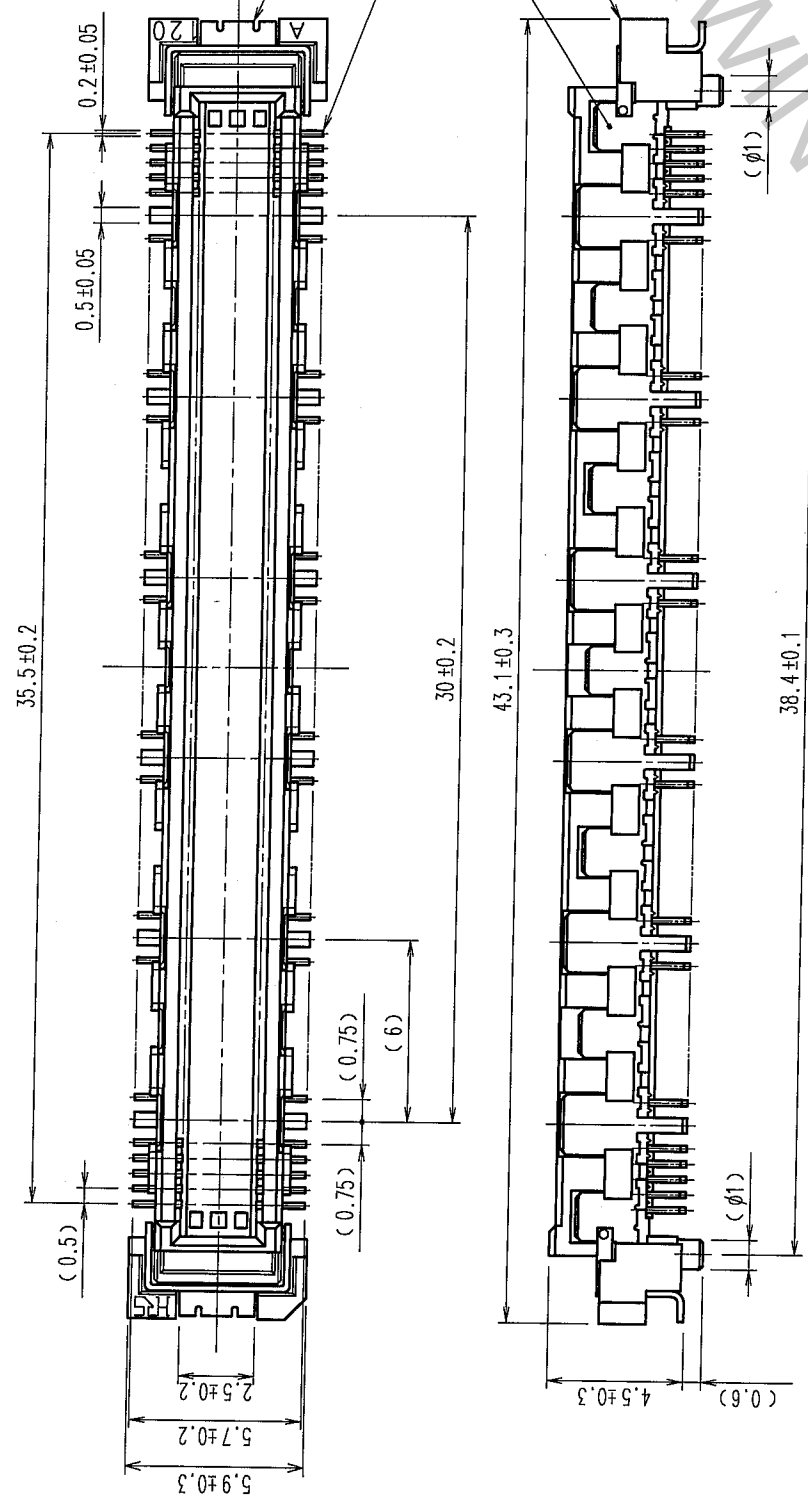


CROSS CUT SECTION - SIGNAL (5 : 1)

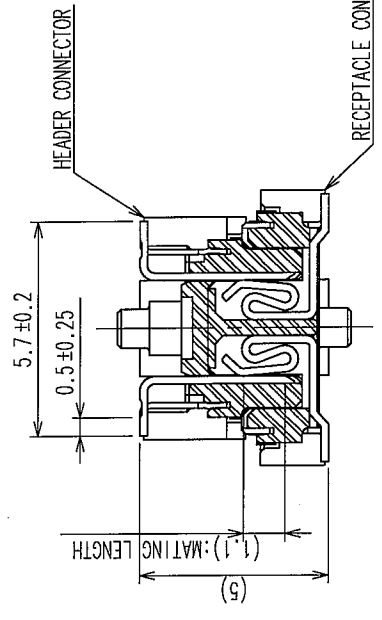

RECOMMENDED LAND PATTERN DIMENSION OF PCB

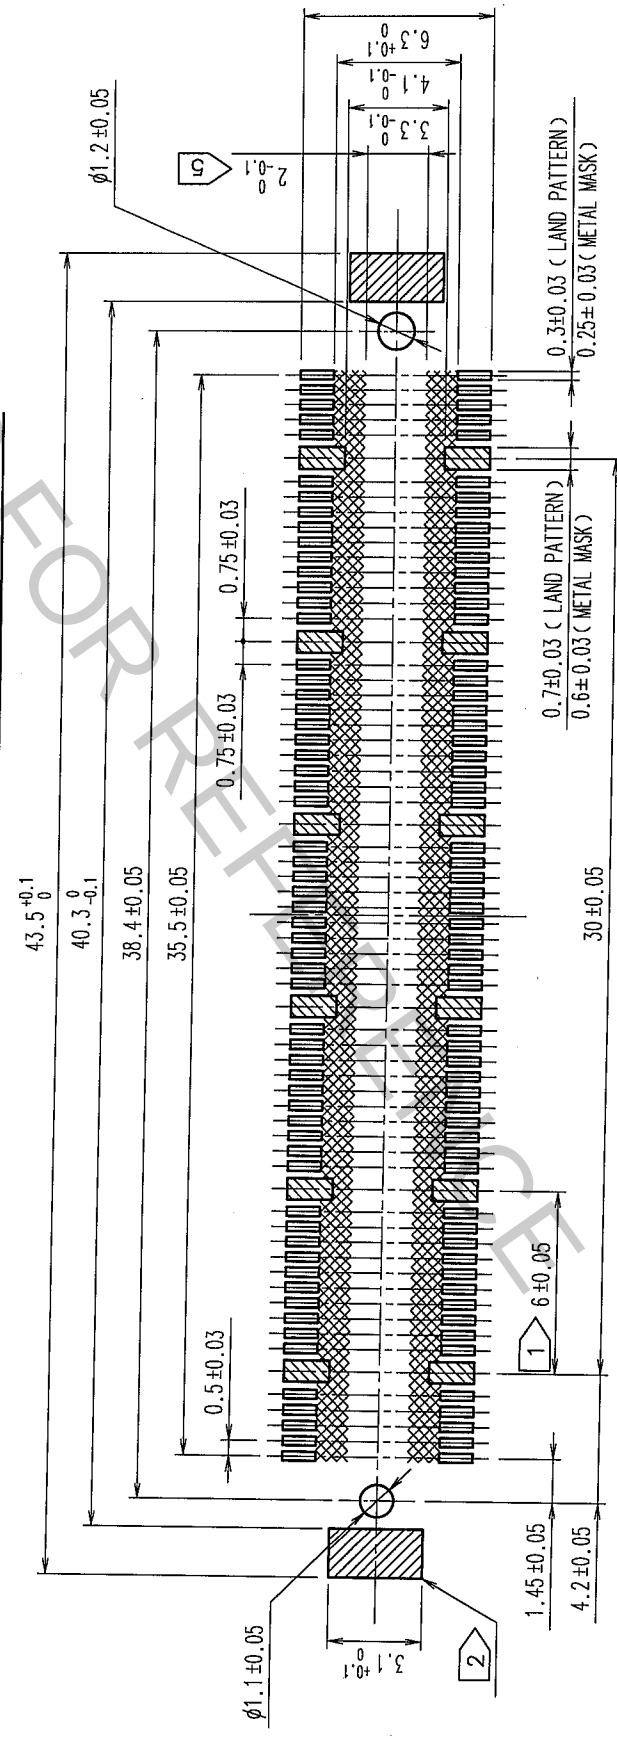



CROSS CUT SECTION - GROUND (5 : 1)

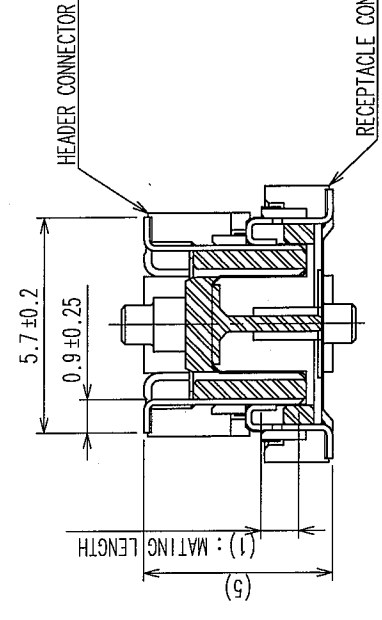

- NOTES
- 1 HATCHED PARTS: GROUND CIRCUIT.
 - 2 HATCHED PARTS: GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 5 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 6 EMBOSS CARRIER TAPE PACKAGE IS APPLIED ON THIS PRODUCT. PLEASE REFER TO THE SHEET 2/2 FOR THE DETAILS.
 - 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

2	PHOSPHOR BRONZE	TIN-PLATING	4	PHOSPHOR BRONZE	TIN-PLATING
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min. LEAD AREA: TIN-PLATING 1μm min. UNDER PLATING: NICKEL 1μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL	DRAWN T. YANAGISAWA		DESIGNED K. Ogawa	CHECKED H. Kawa	APPROVED H. Kawa
			'05.12.14	'05.12.15	'05.12.16
SCALE 4 : 1	DRAWING NO. EDC3-151962-21		PART NO. FX10A-120P/12-SV1(91)		
UNITS mm	HIROSE ELECTRIC CO., LTD		CODE NO. CL570-0103-5-91		
					1/2

COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE
△												
△												
△												
△												

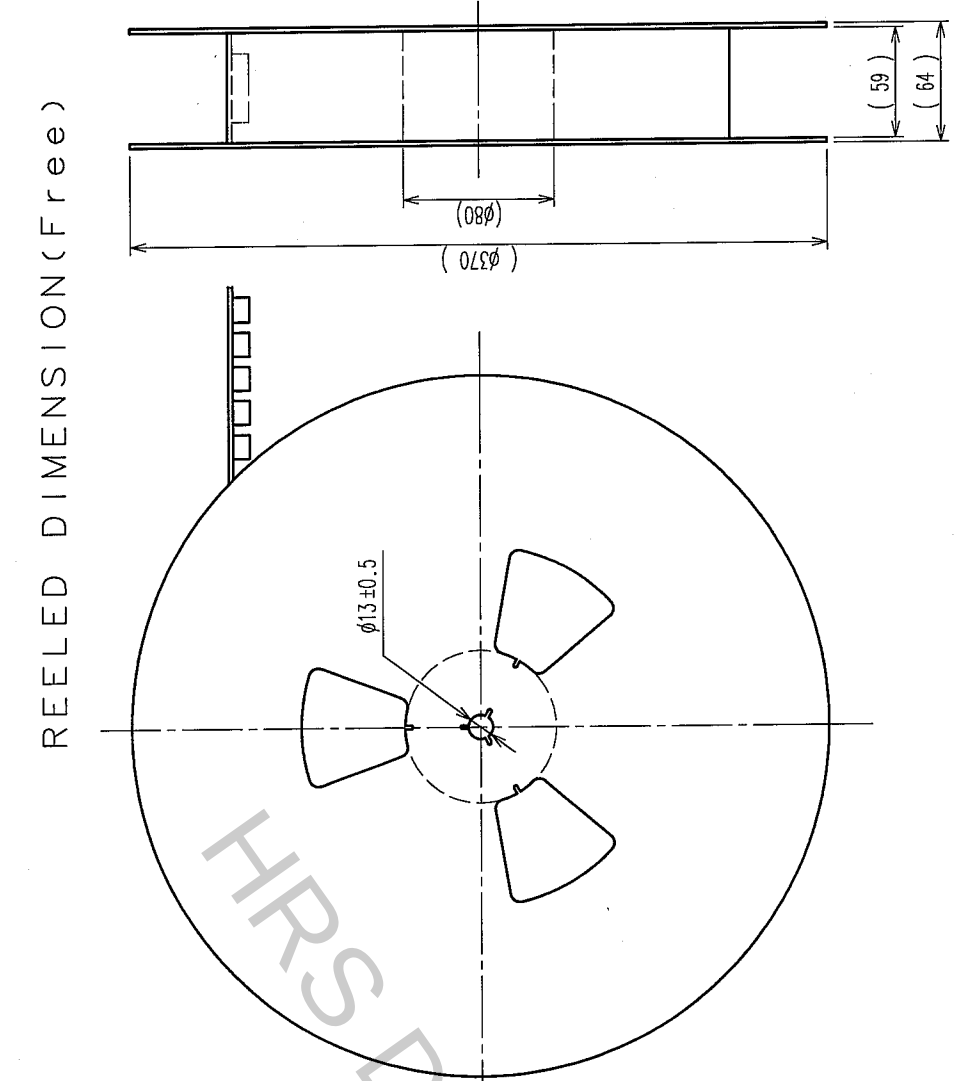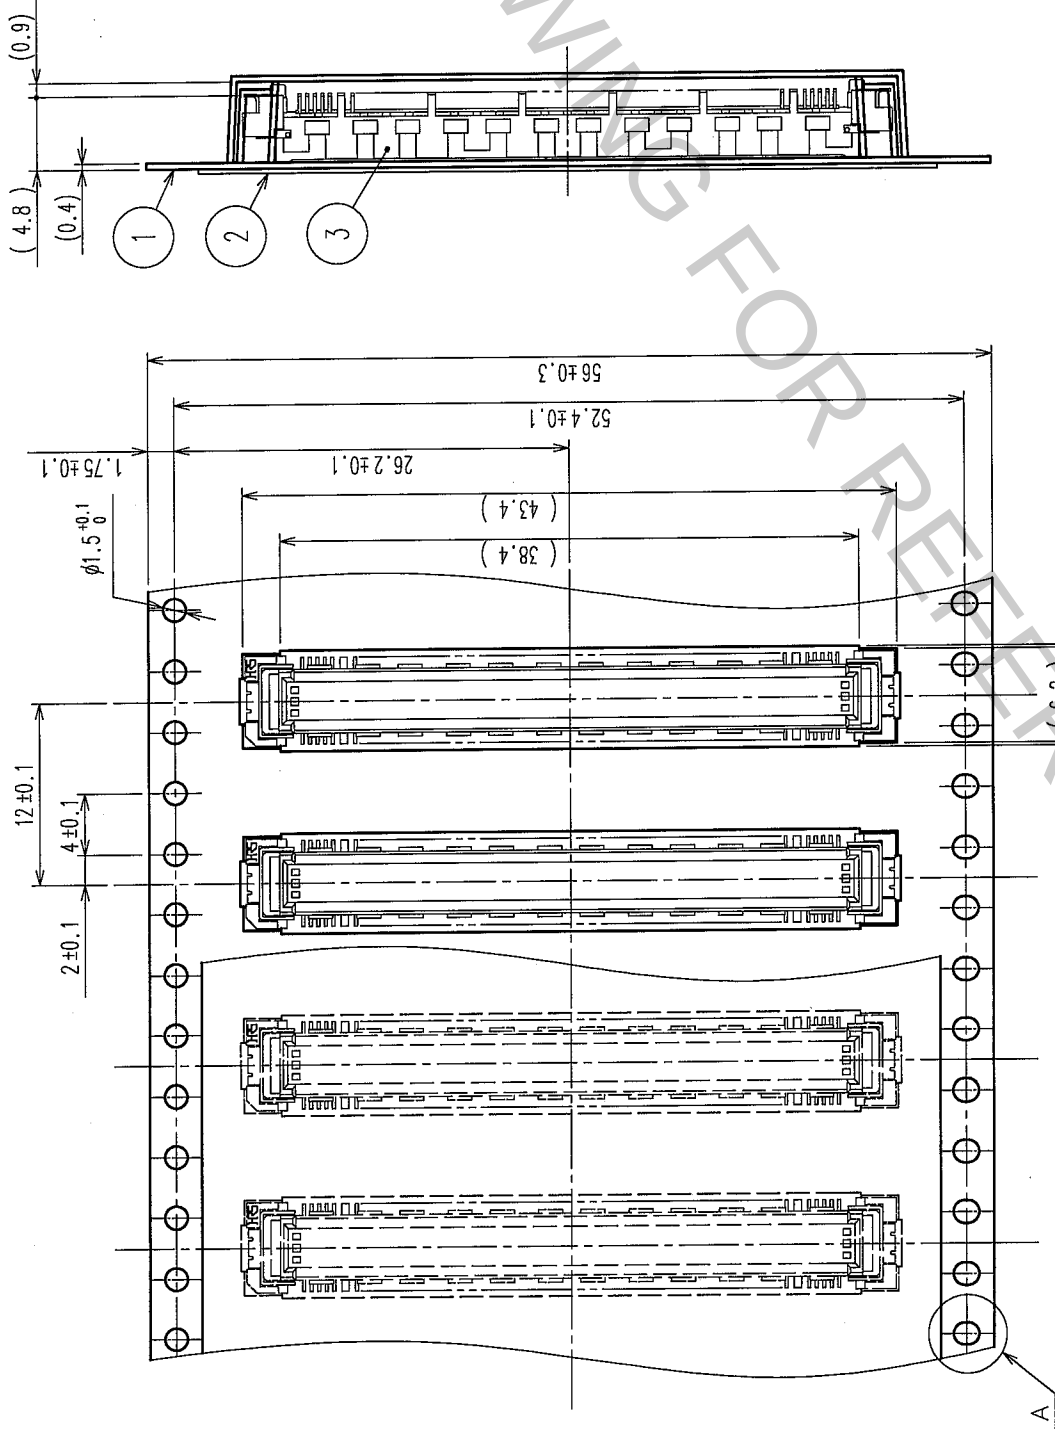

NOTES 1 1 REEL: 1000 CONNECTORS.
2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

2		PET	TOP COVER TAPE		EMBOSSED CARRIER TAPE		3	(CONNECTOR)	
1		PS							
NO.		MATERIAL	FINISH, REMARKS		NO.		MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)		DRAWN		DESIGNED		CHECKED		APPROVED	
CL		T. YANAGISAWA		H. Yamamura		K. Ogawa		H. Kamae	
DRAWING FOR PACKING		'05.12.14		'05.12.14		'05.12.15		'05.12.16	
DRAWING NO.		PART NO.		F		F		F	
EDC3-151962-21		FX10A-120P/12-SV1(91)							
SCALE		UNITS		CODE NO.		CL		CL	
2 : 1		mm		CL570-0103-5-91					