




LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
AF	50		G1	REVISED PER ECR-08-007950	10APR08	HMR DD
			G2	REVISED PER ECR-14-016318	03NOV14	L.P T.D

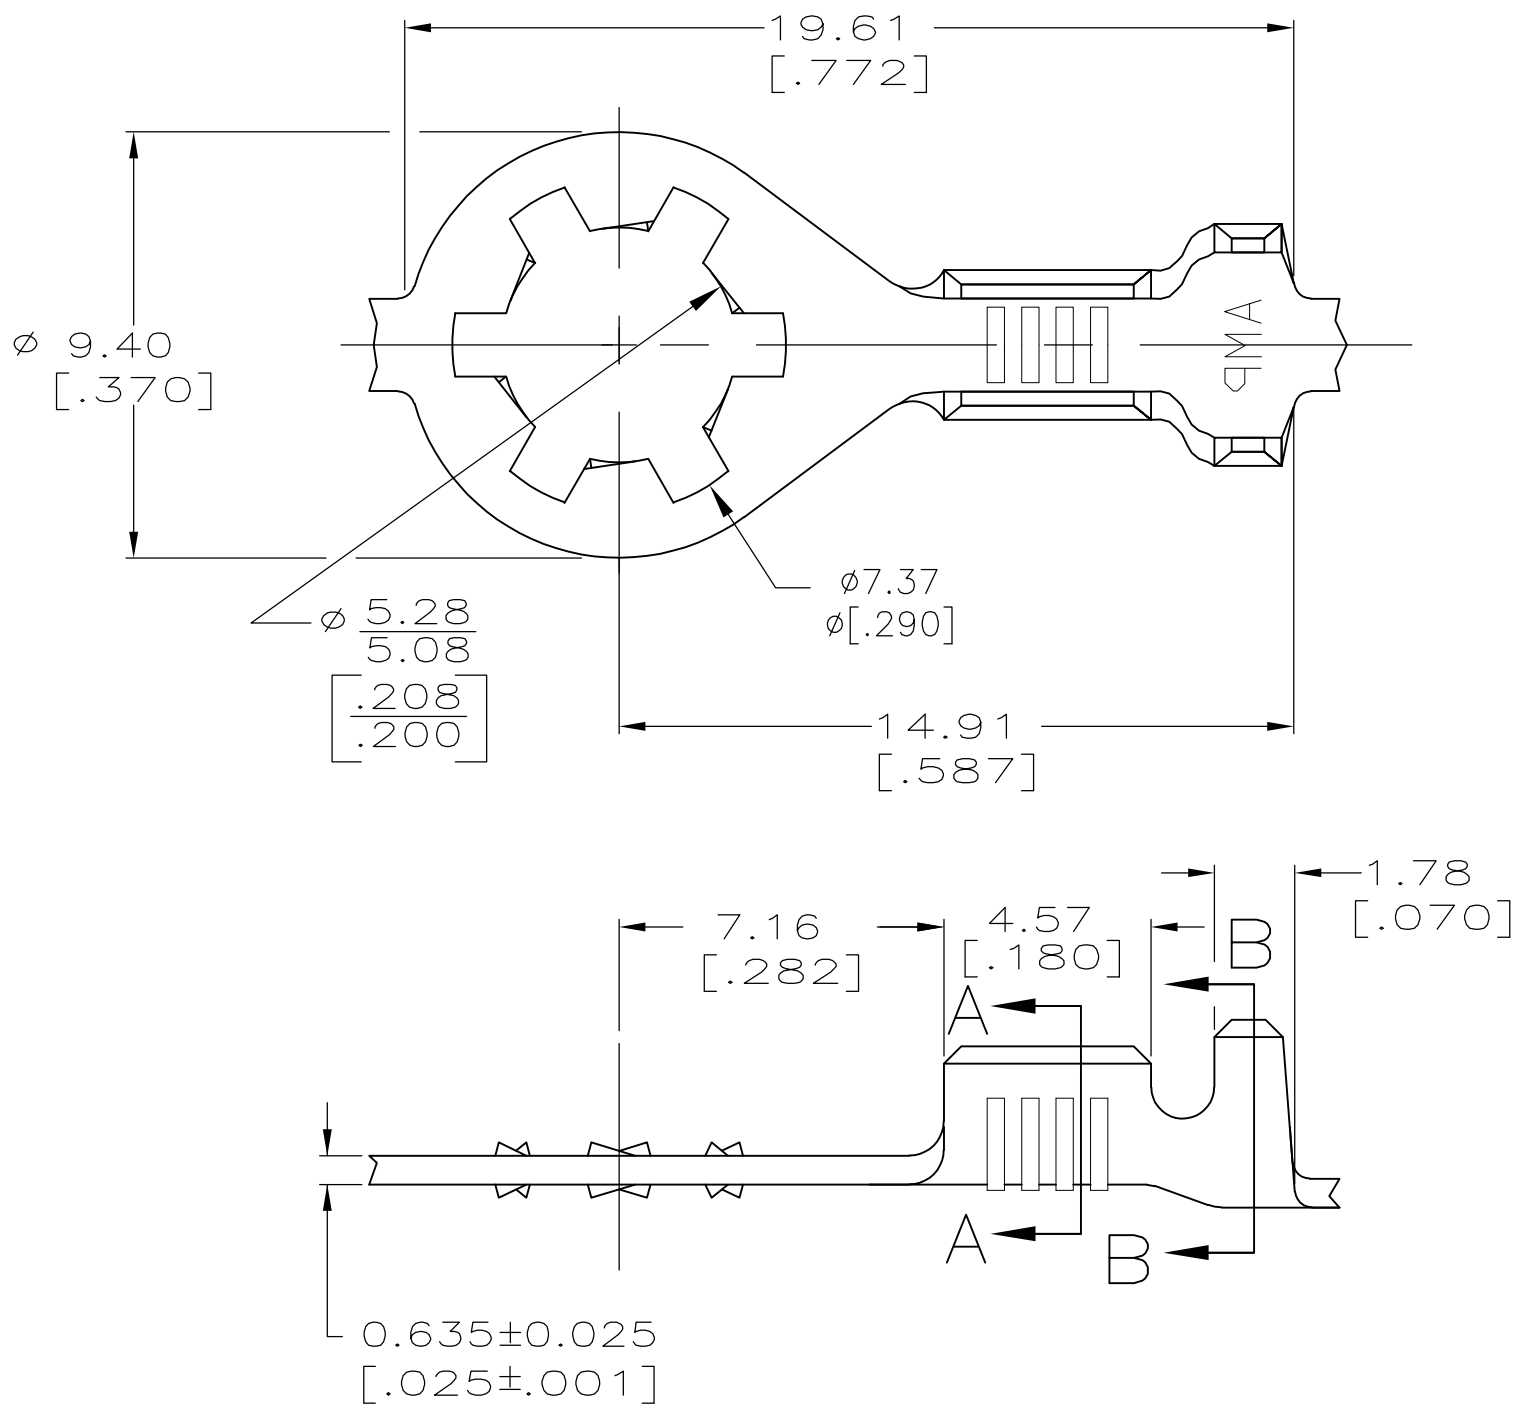

- 1 CONTINUOUS STRIP ON REELS.
- 2 0.02032 [.000080] MIN BRIGHT TIN PLATE OVER 0.0127 [.000050] MIN NICKEL UNDERPLATE.
- 3 WIRE RANGE: 0.3-0.8mm² [22-18] AWG.
- 4 INSULATION RANGE: 2.03-3.05 [.080-.120] DIA.
- 5 0.02032 [.000080] MIN TIN PLATE.
- 6 PREPRODUCTION - F.A.S.R REQUIRED.
- 7 SUBSTITUTED BY P/N 640271-3

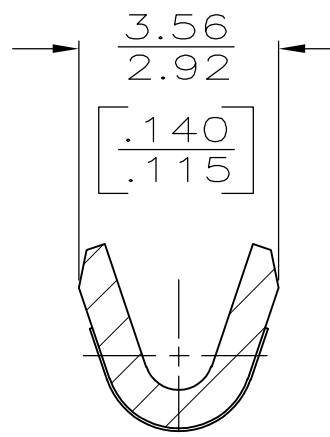

SECTION A-A
SCALE 8:1

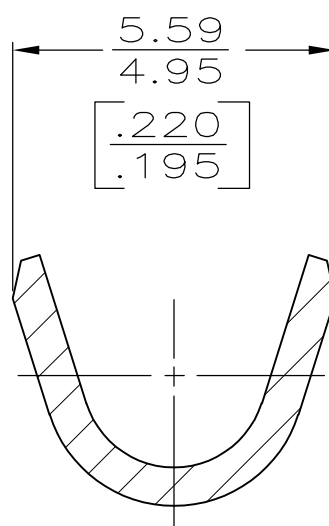

SECTION B-B
SCALE 8:1

F or O	4.57 [.180]	6.35 [.250]	F	2.54 [.100]	1.75 [.069]	0.8mm ² [18]
					1.65 [.065]	0.5mm ² [20]
					1.60 [.063]	0.3mm ² [22]
TYPE	WIDTH	STRIP LENGTH $\pm$ 0.38 [$\pm$.015]	TYPE	WIDTH	$\pm$ 0.051 [$\pm$.002] HEIGHT	WIRE
INSUL BARREL CRIMP			WIRE BARREL CRIMP			

7		5	640271-3
	OBSOLETED		-
		2	640271-1
		FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 02MAY2003 MICHAEL S. FEHER	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		CHK 02MAY2003 D.F. DECKER	NAME			
		APVD 02MAY2003 D.F. DECKER	RING			
		PRODUCT SPEC	SIZE			
		APPLICATION SPEC	CAGE CODE			
MATERIAL #2 HARD STEEL	FINISH SEE TABLE	WEIGHT -	DRAWING NO A2 00779 C=640271		RESTRICTED TO -	
CUSTOMER DRAWING		SCALE 6:1		SHEET 1 of 1	REV G2	