



Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note. As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.



PCRKA30065F8M1


650V / 300A Extremefast Diode

Features

- Automotive Qualified
- Maximum Junction Temperature 175°C
- Extremefast technology with Soft Recovery
- Low Forward Voltage ($V_F = 1.3V$ (Typ) @ $I_F = 300A$)

Applications

- Automotive Traction Modules
- General Power Modules

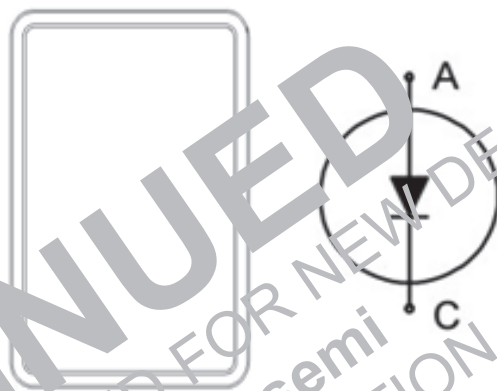

Ordering Information

P/N	PCRKA30065F8	
Packing	Wafer (Sawn-on-foil)	
	mils	μm
Die Size	283 X 394	7,200 X 10,000
Anode Area	235 X 345	5,970 X 8,770
Scribe Lane	3.14	80
Die thickness	3	77
Top metal	Al (0.5% Cu)	
Back metal	NiV/Ag	
Topside Passivation	SiN and Polyimide	
Wafer diameter	200mm	
Max. Possible Die per Wafer	331	

Absolute Maximum Ratings ($T_{VJ}=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Ratings	Units
V_R	Voltage Cathode to Anode	650	V
I_F	Continuous Forward Current	(Note 1)	A
T_J	Junction Temperature Range	-55 to +175	$^{\circ}\text{C}$
	Operating Junction Temperature	-55 to +150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature Range	+17 to +25	$^{\circ}\text{C}$

Notes:

1: Depends on the thermal properties of assembly

Electrical Characteristics of the Diode ($T_{VJ} = 25^{\circ}\text{C}$ unless otherwise noted).

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
Static Characteristics (Tested on wafers)						
I_R	Reverse Leakage Current	$V_R = 650\text{V}$	-	-	30	μA
V_{BR}	Breakdown Voltage	$I_R = 1\text{mA}$	650	-	-	V
V_F	Forward Voltage	$I_F = 100\text{A}$	-	1.1	1.65	V

Electrical Characteristics (Not subject to production test - verified by design characterization)

I_R	Reverse Leakage Current	$V_R = 650\text{V}, T_{VJ} = 175^{\circ}\text{C}$	-	-	-	mA
V_F	Forward Voltage	$I_F = 300\text{A}, T_{VJ} = 25^{\circ}\text{C}$	-	1.3	1.9	V
		$I_F = 300\text{A}, T_{VJ} = 175^{\circ}\text{C}$	-	1.2	-	V
Q_{rr}	Reverse Recovery Charge	$I_F = 300\text{A}, V_R = 300\text{V},$ $dI_F/dt = 1000\text{A}/\mu\text{s}$	-	5.29	-	μC
I_{rr}	Reverse Recovery Current		-	57.15	-	A
T_{rr}	Reverse Recovery Time		-	159.1	-	ns

For ordering, technique and other information on Onsemi automotive bare die products, please contact automotivedie@onsemi.com

DISCONTINUED

THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local
Sales Representative