

NOTES:


1. MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
HOUSING – BRASS, GOLD PLATING
BODY – BERYLLIUM COPPER, GOLD PLATING
CONTACT – BRASS, GOLD PLATING
INSULATOR – PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0–6 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: – 55°C to +155°C

THIRD ANGLE PROJ.





REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
B	NO.2 WAS CHANGED\RD-DM89011401B	01-14-00'	---	JOHNSON
B1	RECOMMENDED CABLE STRIPPING DIM'S WAS CHANGED	05-06-09'	---	ANDY.C
C	ADD DANBURY P/N\RD-DM11040601R3	12-Apr-11'	48532	SH



RECOMMENDED
CABLE STRIPPING DIM'S

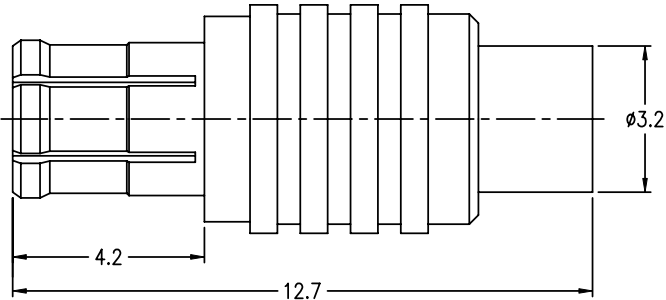

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm 0.5 – 6mm 6 – 30mm 30 – 120mm ANGLES
± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°

NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	DRAWN ROSE	DATE 12-Apr-11'	TITLE MCX DIRECT SOLDER PLUG (FOR .085", .086")	Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com
REFERENCE	ENGINEER JOHNSON	DATE 05-31-00'		DRAWING NO. MCX1181A1-3GT30G-.085-50
FINISH	APPROVED SCOTT	DATE 12-Apr-11'	SCALE: 6/1	ITEM NO. 081181AAA45GE5F
	CAD FILE F:\DWG\MCX\1181A1\085-50\3GT30GSZ-C		DWG SIZE B	PART NO. 919-120P-51SX
			SHEET 2 OF 2	
			REV C	