

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

© COPYRIGHT - By - TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC
HBDIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	CHANGE LOGO&ADD LINE IDENTIFICATION ECO-12-001771	21Aug2012	YS.H	BH.Y

PART A

D2

TE c **us** 

OJE-SS-118HM 18V

10A 250V~ / 30V=






LOT NO. D



SEE NOTE 5

D2

PART B

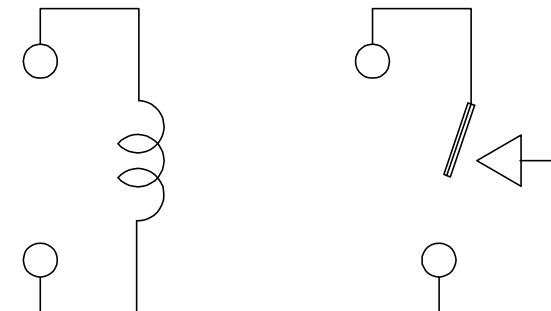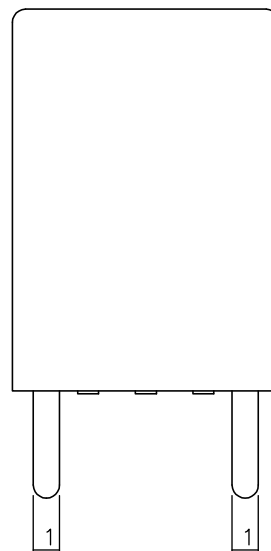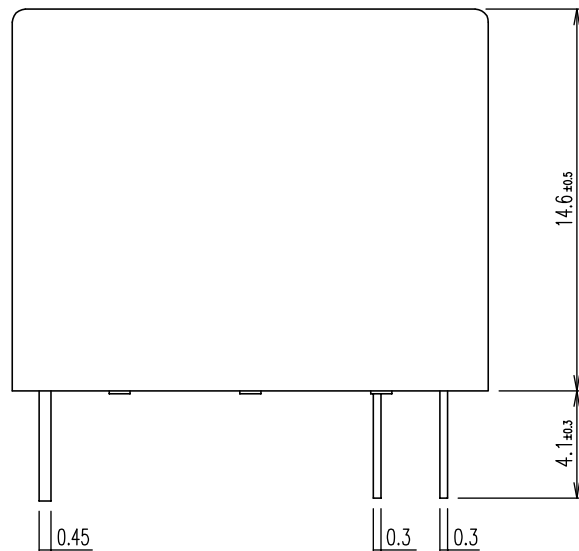

CONNECTION FIGURE

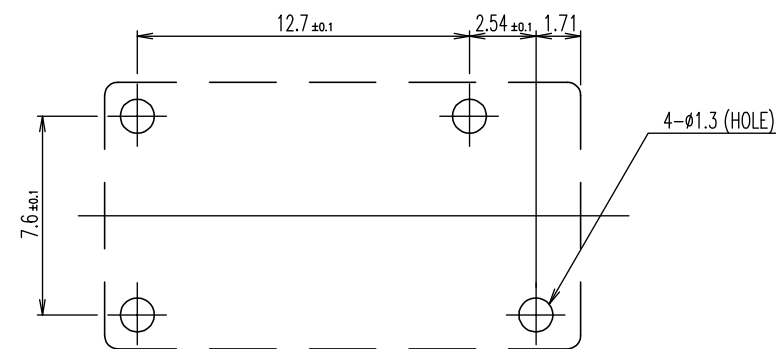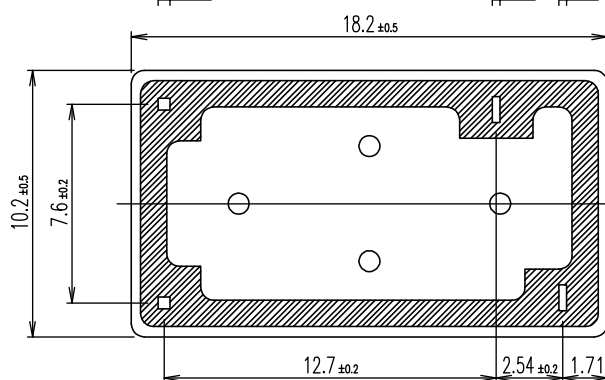FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING
(BOTTOM VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN H.Sasaki

CHK Y.Oikawa

APVD A.Nagai

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE

TE Connectivity

NAME
OJE-SS-HM SPEC,000 CUSTOMER DRAWING

SIZE A3 CAGE CODE 00779 DRAWING NO 1461103 RESTRICTED TO

SCALE 5:1 SHEET 1 OF 2 REV D2

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

© COPYRIGHT - By - TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

HB

-

P

LTR

DESCRIPTION

DATE

DWN

APVD

-

SEE SHEET 1

-

-

-

ACTIVE	1461103-3	OJE-SS-148HM, 000	48V	OJE-SS-148HM	h
ACTIVE	6-1419128-4	OJE-SS-124HM, 000	24V	OJE-SS-124HM	g
OBSOLETE	1461103-2	OJE-SS-118HM, 000	18V	OJE-SS-118HM	f
ACTIVE	4-1419128-3	OJE-SS-112HM, 000	12V	OJE-SS-112HM	e
ACTIVE	3-1419128-5	OJE-SS-109HM, 000	9V	OJE-SS-109HM	d
ACTIVE	3-1419128-2	OJE-SS-106HM, 000	6V	OJE-SS-106HM	c
ACTIVE	2-1419128-9	OJE-SS-105HM, 000	5V	OJE-SS-105HM	b
ACTIVE	1461103-1	OJE-SS-103HM, 000	3V	OJE-SS-103HM	a
PART STATUS	PART NO	DESCRIPTION	PART B	PART A	TYPE

- ① ② NOTES:
1.LOT NO. SYSTEM AS FOLLOWING:

0171014

WEEK:04

YEAR :07

- ② 2.TERMINAL DIMENSION IS BEFORE SOLDER DIP;

- ② 3.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH,THICKENSS AND DIAMETER.
+0.5mm FOR LENGTH.

- ② 4.MARKING FROM INK TO LASER.

- ② 5.ADD LOT NO. SYSTEM AS FOLLOWING;

1	1	A
I	II	III

- I, DIGITS FOR DAY OF THE WEEK
1...MONDAY IN THIS WEEK;
2...TUESDAY IN THIS WEEK;
.....

- 7...SUNDAY IN THIS WEEK
II, DIGITS FOR SHIFT OF THE DAY
1...DAY SHIFT IN THIS DAY;
2...NIGHT SHIFT IN THIS DAY;

- III, ONE CHARACTER DISTINGUISH THE LINE
IDENTITY,
SUCH AS: A,B.....Z

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	H.Sasaki		-
		CHK	Y.Oikawa		-
DIMENSIONS: mm		APVD	A.Nagai		-
		PRODUCT SPEC			
		APPLICATION SPEC			
MATERIAL		FINISH	WEIGHT		-
-		-	-		-
		CUSTOMER DRAWING			

EPOXY RESIN		SEAL (BASE & BOBBIN)		15
3UEW		MAGNETIC WIRE		14
94V-0	P.B.T	CASE		13
94V-0	P.B.T	BASE		12
94V-0	P.B.T	BOBBIN		11
	SOLDER DIP	COIL TERMINAL		10
94V-0		CARD		9
	Ag ALLOY	MOVABLE CONTACT		8
	Ag	NO.CONTACT		7
	STEEL	HINGE SPRING		6
	SOLDER DIP	NO.TERMINAL		5
	SOLDER DIP	MOVABLE SPRING		4
	NIP	CORE		3
	NIP	ARMATURE		2
	NIP	YOKE		1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

TE Connectivity			
NAME			
OJE-SS-HM SPEC,000 CUSTOMER DRAWING			
-			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C= 1461103	-
SCALE 5:1		SHEET 2 OF 2	REV D2