

Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 394493

SINGLE LAMP LED BULB

Data Sheet

Description:

These single lamp LED Bulbs are specifically designed for flashlight electric equipment, indicator light switch and where a wide view angle. The 9mm round shaped radiation pattern (130°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor applications where a wide viewing angle and readability in sunlight are essential.

High efficiency LED materials are used in this Bulb.

Every lamp is made with an advanced optical grade epoxy offering superior high shock and high temperature resistance in outdoor applications.

Feature:

- Wide view angle
- High luminous output
- Seven kind color
- Solid-state Vibration resistant
- Saving power
- Long life


Option:

- 6V to 240V AC or DC
- Other industry standard base

Part No.: AB-9R-28V-B

Single Lamp LED Bulb

PACKAGE DIMENSIONS:

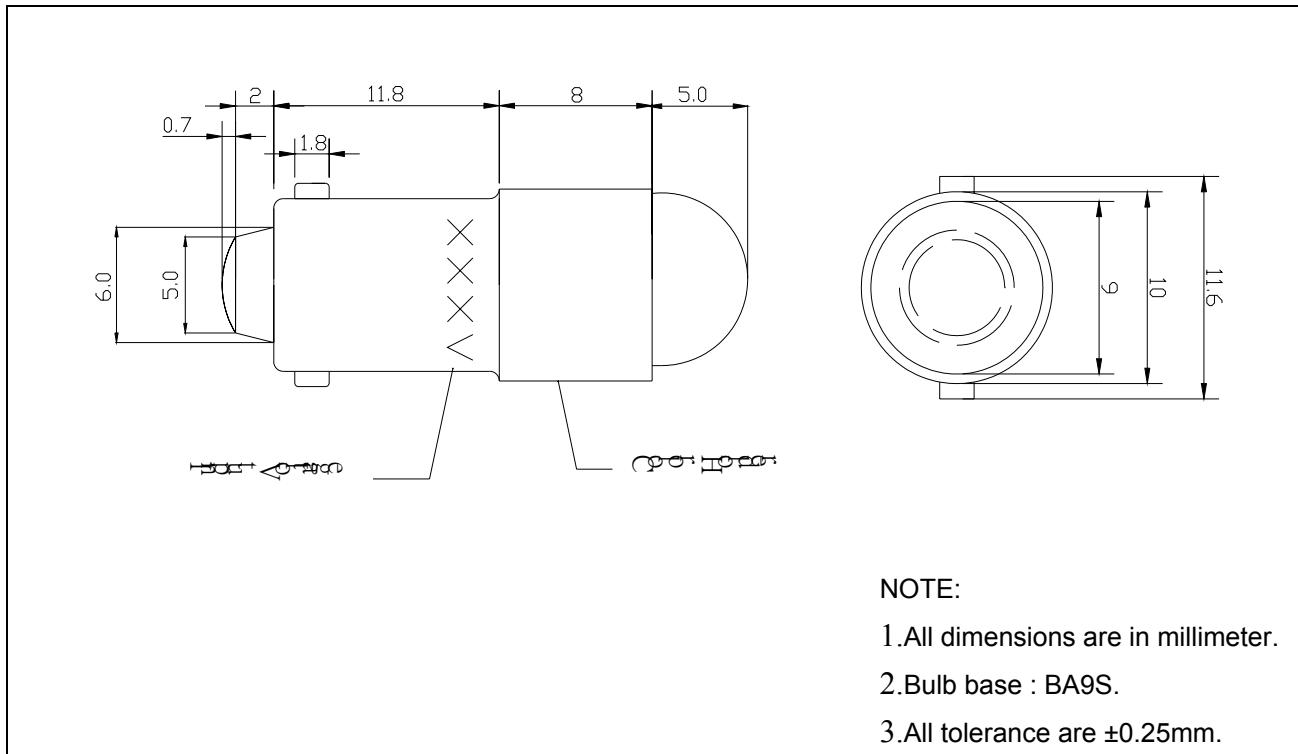

Part No.: AB-9R-28V-B

Single Lamp LED Bulb

FEATURE:

SUPER LUMINOSITY RED LED (AlGaInP).
WHITE DIFFUSE PACKAGE.
9mm ALL RESIN MOLD.
WIDE VIEWING ANGLE.
BASE MODEL BA9S.
BI-POLAR ELECTRIC.

MATERIALS:

LED LENS: UV RESISTENT EPOXY
COLOR HOLDER: NYLON 66 UL 94-V2
BULB BASE:COPPER (CU)

ABSOLUTE MAXIMUM RATING: $T_a = 25^{\circ}\text{C}$

PEAK OPERATE VOLTAGE..... 33 V
OPERATING TEMPERATURE..... -25 TO +85°C
STORAGE TEMPERATURE..... -35 TO +100°C
LED BULB LIFE..... 50000 HOURS
(LUMINANCE REDUCES to 50%)

ABSOLUTE OPTICAL CHARACTERISTIC

$T_a = 25^{\circ}\text{C}$

PARAMETER		SYMBOL	MIN	TYP	MAX	UNIT
Operate Voltage		V	----	28	33	V
Luminous Intensity	$I_F = 14 \text{ mA}$	I_v	250	350	----	mcd
Dominant Wavelength	$I_F = 14 \text{ mA}$	d	----	630	----	nm
Spectrum Radiation Bandwidth	$I_F = 14 \text{ mA}$		----	30	----	nm
Forward Current	$V_{IN} = 28 \text{ V AC}$	I_F	----	14	----	mA
Viewing Angle		2 1/2	----	130	----	deg