



# SAW multimedia filters

## **Series/Type: K7257D**

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39389K7257N201		2011-01-14	2011-09-30	2012-09-30

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at [www.epcos.com/sales](http://www.epcos.com/sales).

## SAW Components

**K 7257 D**

### IF Filter for Video / Multistandard Applications

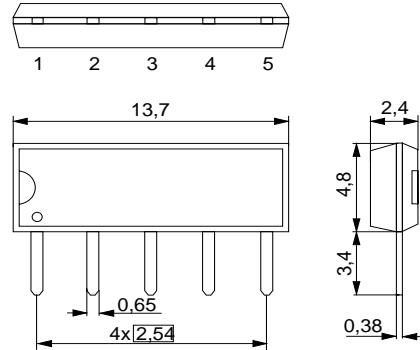
**33,90 MHz and 38,90 MHz**

#### Data Sheet

##### Standard

- B/G
- L/L'
- M/N

Duroplast package **SIP5D**



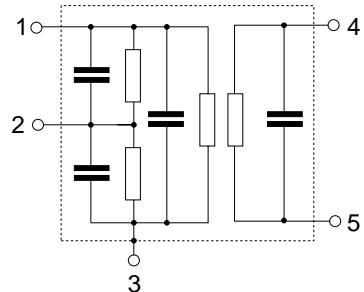
Dimensions in mm, approx. weight 0,5 g

##### Terminals

- Tinned CuFe alloy

##### Pin configuration

1	Input
2	Switching input
3	Chip carrier – ground
4	Output
5	Output



Type	Ordering code	Marking and package according to	Packing according to
K 7257 D	B39389-K7257-N201	C61157-A1-A21	F61074-V8049-Z000

##### Maximum ratings

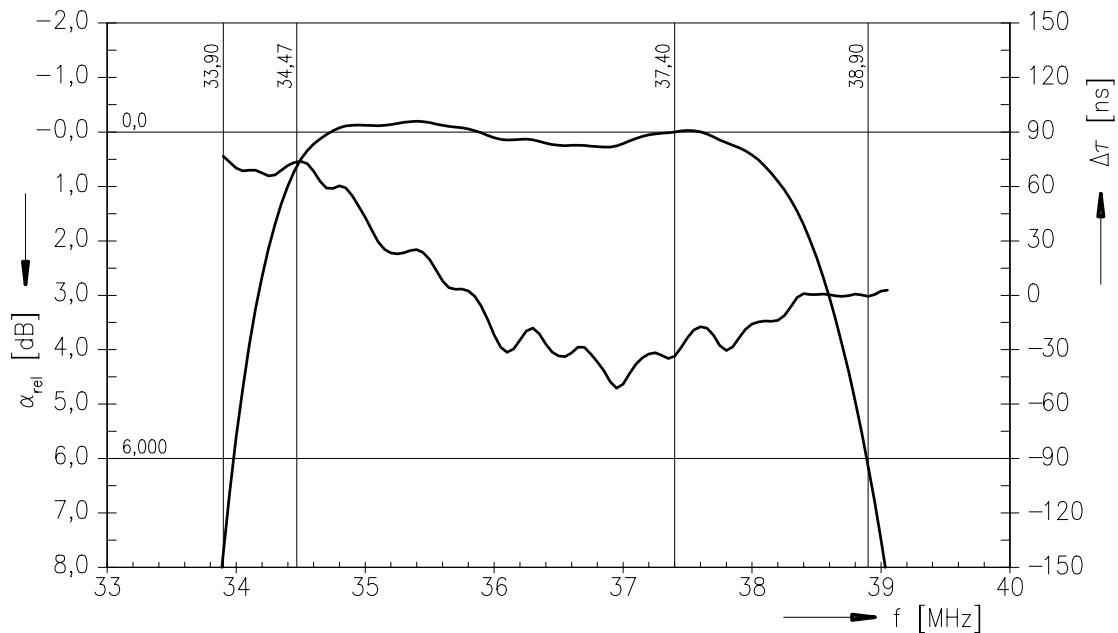
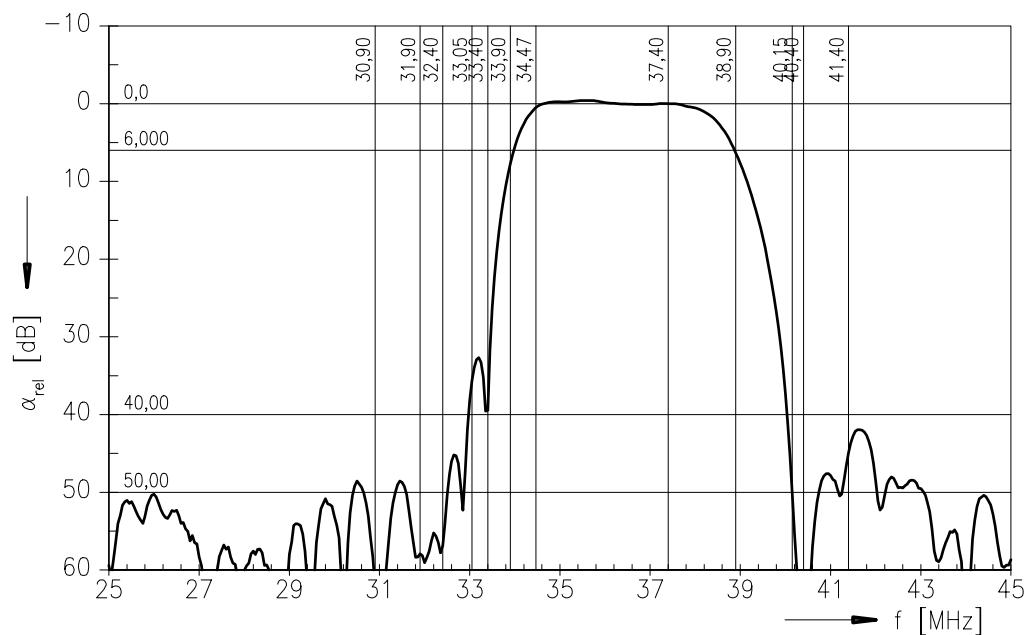
Operable temperature range	$T_A$	-25/+65	°C	
Storage temperature range	$T_{stg}$	-40/+85	°C	
DC voltage	$V_{DC}$	5	V	between any terminals
AC voltage	$V_{pp}$	10	V	between any terminals

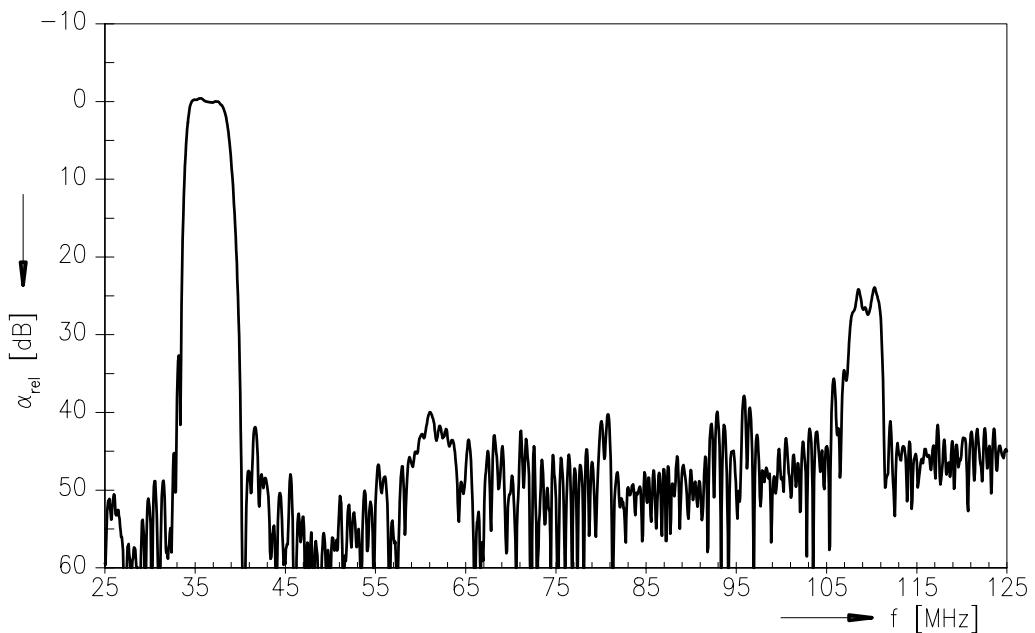
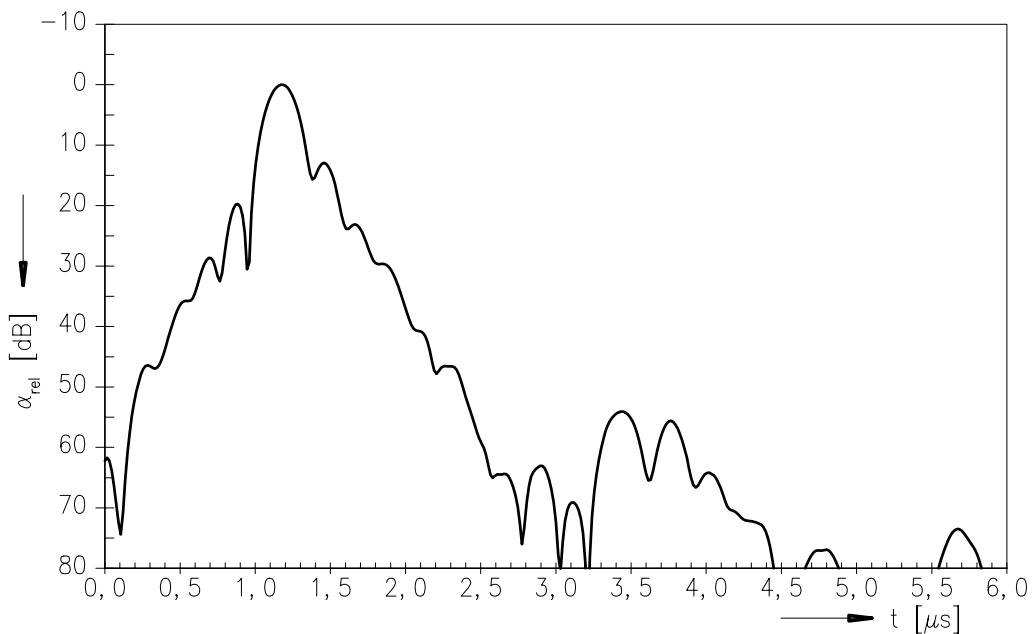
**SAW Components****K 7257 D****IF Filter for Video / Multistandard Applications****33,90 MHz and 38,90 MHz****Data Sheet****Characteristics in B/G, L/L' mode (switching input pin 2 connected to ground)**Reference temperature:  $T_A = 25^\circ\text{C}$ Terminating source impedance:  $Z_S = 50 \Omega$ Terminating load impedance:  $Z_L = 2 \text{ k}\Omega \parallel 3 \text{ pF}$ 

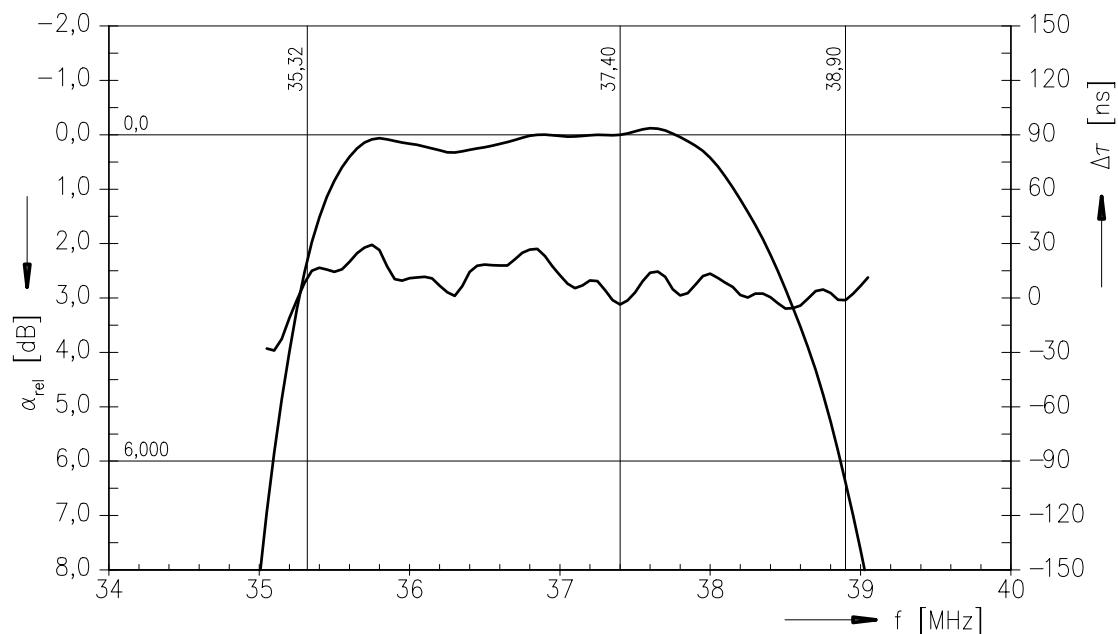
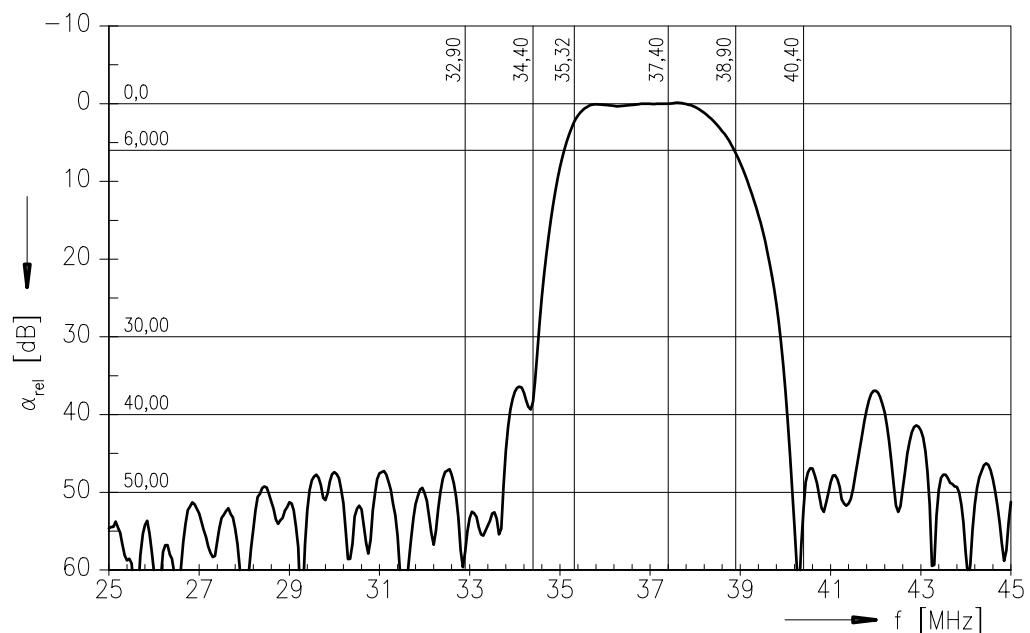
		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Insertion attenuation</b>	$\alpha$				
Reference level for the following data	37,40 MHz	15,1	16,6	18,1	dB
<b>Relative attenuation</b>	$\alpha_{\text{rel}}$				
Picture carrier	38,90 MHz	5,1	6,1	7,1	dB
Picture carrier	33,90 MHz	—	7,8	—	dB
Color carrier	34,47 MHz	-0,5	0,5	1,5	dB
Sound carrier	33,40 MHz	29,0	39,0	—	dB
	33,45 MHz	23,0	32,0	—	dB
NICAM sound carrier	33,05 MHz	—	35,0	—	dB
Adjacent picture carrier	30,90 MHz	47,0	57,0	—	dB
	31,90 MHz	48,0	57,0	—	dB
	32,40 MHz	48,0	60,0	—	dB
	40,15 MHz	41,0	52,0	—	dB
Adjacent sound carrier	40,40 MHz	45,0	56,0	—	dB
	41,40 MHz	40,0	46,0	—	dB
Lower sidelobe	25,00 ... 31,90 MHz	42,0	47,0	—	dB
Upper sidelobe	40,40 ... 45,00 MHz	37,0	42,0	—	dB
<b>Reflected wave signal suppression</b>					
1,2 $\mu\text{s}$ ... 6,0 $\mu\text{s}$ after main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		42,0	52,0	—	dB
<b>Feedthrough signal suppression</b>					
1,3 $\mu\text{s}$ ... 1,2 $\mu\text{s}$ before main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		—	56,0	—	dB
<b>Group delay predistortion</b>	$\Delta\tau$				ns
(reference frequency 38,90 MHz)					
	36,90 MHz	—	-50	—	ns
	34,47 MHz	—	50	—	ns
<b>Impedance at 37,40 MHz</b>					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	1,2    17,0	—	$\text{k}\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	1,9    4,5	—	$\text{k}\Omega \parallel \text{pF}$
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-72	—	ppm/K

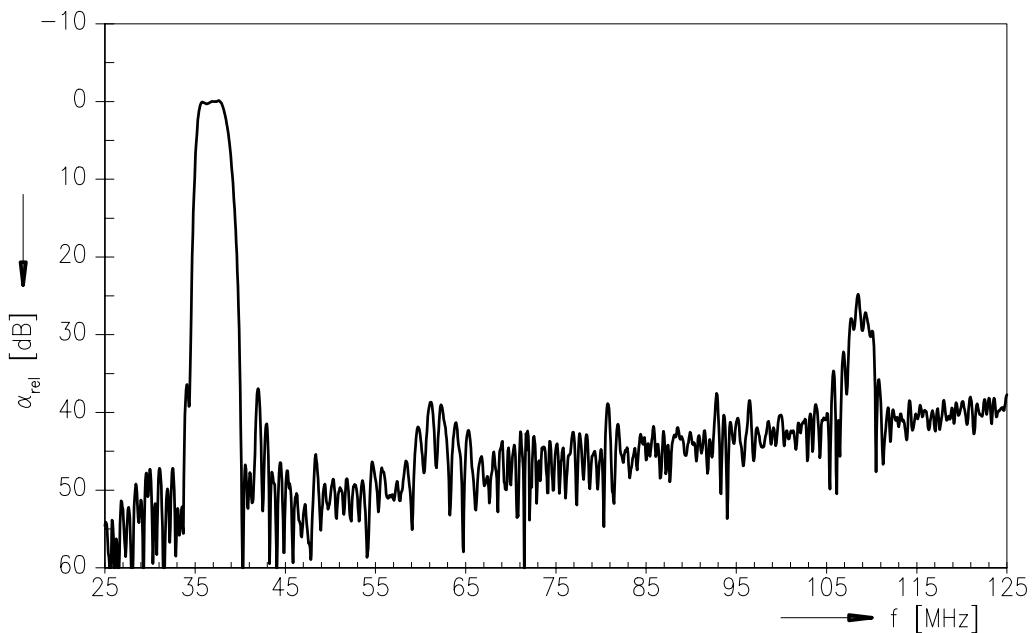
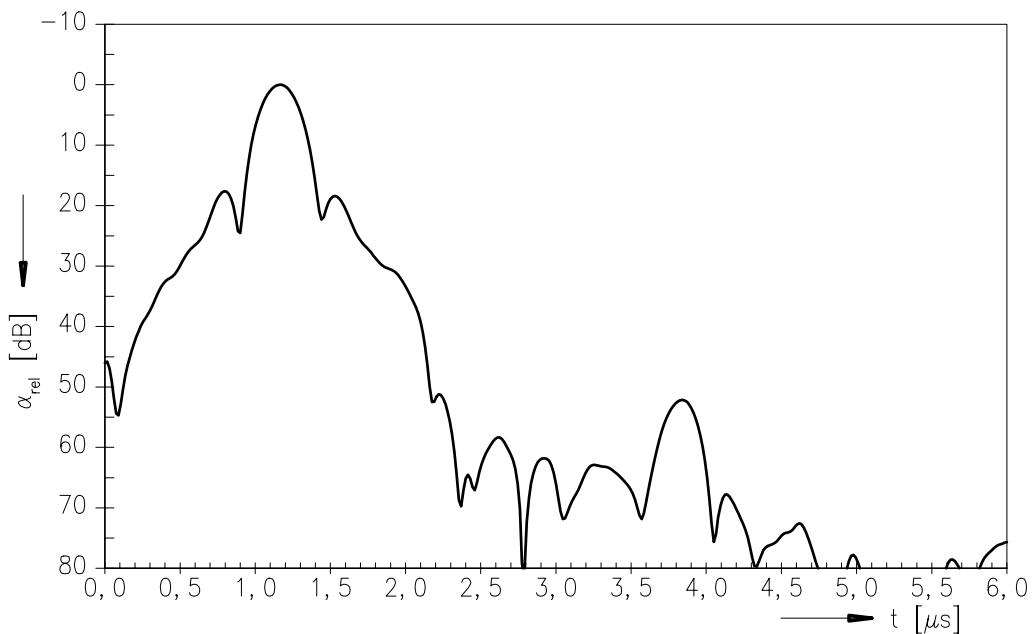
**SAW Components****K 7257 D****IF Filter for Video / Multistandard Applications****33,90 MHz and 38,90 MHz****Data Sheet****Characteristics in M/N mode (switching input pin 2 connected to pin 1)**Reference temperature:  $T_A = 25^\circ\text{C}$ Terminating source impedance:  $Z_S = 50 \Omega$ Terminating load impedance:  $Z_L = 2 \text{ k}\Omega \parallel 3 \text{ pF}$ 

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Insertion attenuation</b>	$\alpha$				
Reference level for the following data	37,40 MHz	14,8	16,3	17,8	dB
<b>Relative attenuation</b>	$\alpha_{\text{rel}}$				
Picture carrier	38,90 MHz	5,2	6,2	7,2	dB
Color carrier	35,32 MHz	1,5	2,5	3,5	
Sound carrier	34,40 MHz	29,0	36,0	—	dB
Adjacent picture carrier	32,90 MHz	42,0	55,0	—	dB
Adjacent sound carrier	40,40 MHz	42,0	56,0	—	dB
Lower sidelobe	25,00 ... 32,90 MHz	38,0	46,0	—	dB
Upper sidelobe	40,40 ... 45,00 MHz	34,0	39,0	—	dB
<b>Reflected wave signal suppression</b>					
1,2 $\mu\text{s}$ ... 6,0 $\mu\text{s}$ after main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		42,0	52,0	—	dB
<b>Feedthrough signal suppression</b>					
1,3 $\mu\text{s}$ ... 1,2 $\mu\text{s}$ before main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		—	50,0	—	dB
<b>Group delay ripple (p-p)</b>	$\Delta\tau$				
35,32 ... 38,90 MHz		—	50	—	ns
<b>Impedance at 37,40 MHz</b>					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	1,3    19,0	—	$\text{k}\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	1,9    4,5	—	$\text{k}\Omega \parallel \text{pF}$
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-72	—	ppm/K

**SAW Components**
**K 7257 D**
**IF Filter for Video / Multistandard Applications**
**33,90 MHz and 38,90 MHz**
**Data Sheet**
**Frequency response in B/G, L/L' mode**


**Data Sheet**
**Frequency response in B/G, L/L' mode**

**Time domain response in B/G, L/L' mode**


**Data Sheet**
**Frequency response in M/N mode**


**Data Sheet**
**Frequency response in M/N mode**

**Time domain response in M/N mode**




**SAW Components**

**K 7257 D**

**IF Filter for Video / Multistandard Applications**

**33,90 MHz and 38,90 MHz**

**Data Sheet**

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW CE MM PD**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EPCOS:

[B39389K7257N201](#)