

Front adapters - FLKM S115-465-7LA/UI/S400 - 2314914

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The FLKM S115/S400 adapter links a SIMATIC® S5 plug directly with the basic SIMATIC® S7 400 card.
Conversion: 6ES5 465-7LA13 to 6ES7 431 0HH00-0AB0 / 6ES7 431 7QH00-0AB0

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 155427
GTIN	4046356155427
Weight per Piece (excluding packing)	328.500 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

Note

Type of note	Notes on operation
Note	Due to the geometry, it is only possible to use every second slot. The LEDs of the S7-400 module are hidden by the S5-115 adapter.

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. permissible operating voltage	60 V DC
Max. permissible current	4 A (per path)
	4 A (per connection, supply via separate power supply)
Mounting position	any

Front adapters - FLKM S115-465-7LA/UI/S400 - 2314914

Technical data

Connection data 1

Connection name	Field level
Connection method	SIEMENS S5-115 U pin strip

Supported controller

Controller	SIEMENS S5-115 U
- suitable I/O card	6ES5 465-7LA13

Standards and Regulations

Standards/regulations	IEC 60664
	DIN EN 50178
Rated insulation voltage	63 V
Rated surge voltage	0.6 kV (Functional insulation)
Pollution degree	2
Overvoltage category	II


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Front adapters - FLKM S115-465-7LA/UI/S400 - 2314914

Circuit diagram

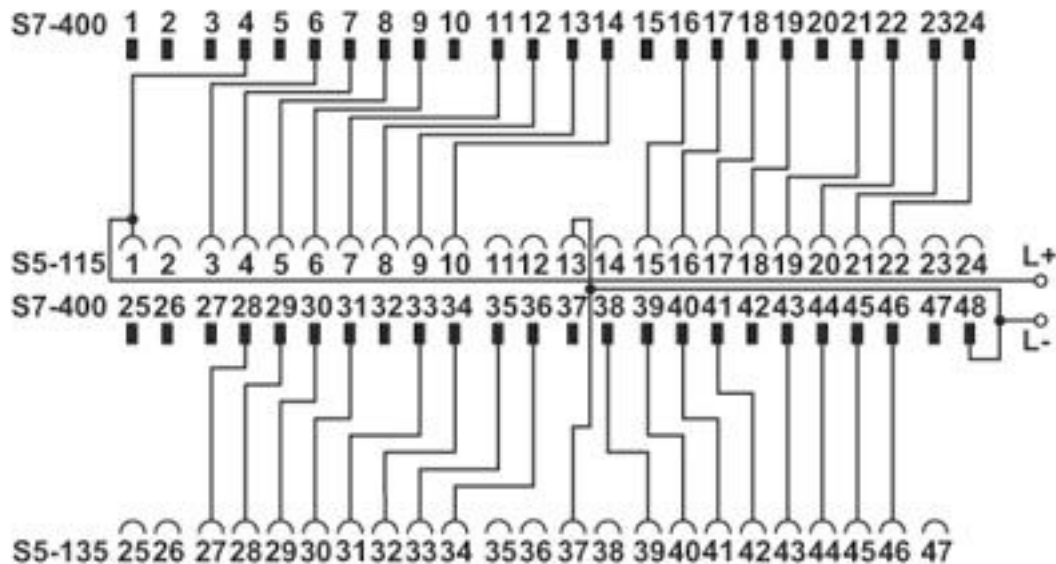

FLKM S115-465-7LA/UI/S400 connection scheme

Classifications

eCl@ss

eCl@ss 5.0	27249290
eCl@ss 5.1	27250300
eCl@ss 6.0	27249200
eCl@ss 7.0	27249290
eCl@ss 8.0	27249290
eCl@ss 9.0	27242292

ETIM

ETIM 4.0	EC002584
ETIM 5.0	EC002584
ETIM 6.0	EC002584

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	32151601

Front adapters - FLKM S115-465-7LA/UI/S400 - 2314914

Classifications

UNSPSC

UNSPSC 19.0	32151601
-------------	----------