


SPECIFICATION CONTROL DRAWING

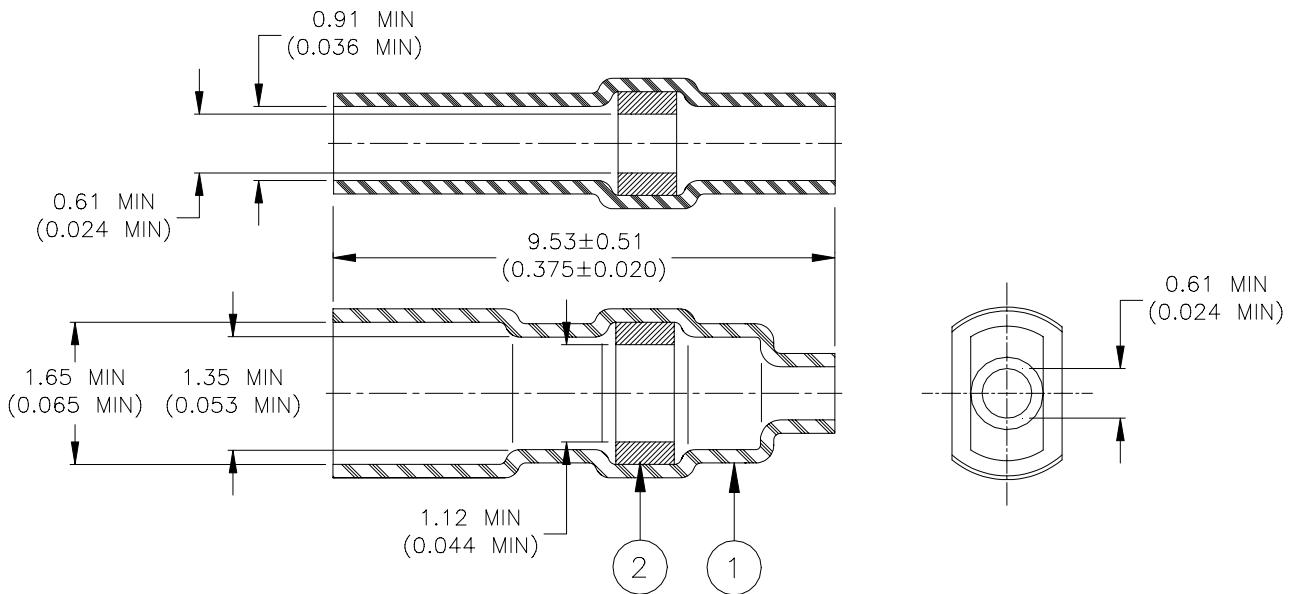

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
 - SOLDER: TYPE Sn96 per ANSI-J-STD-006.
 - FLUX: TYPE ROL1 per ANSI-J-STD-004.

APPLICATION

1. This part is designed to terminate a single 26, 28 or 30 AWG wire.
2. It is also designed for use on micro-miniature connectors having a maximum pin cross sectional area envelope of 0.61 (0.024) diameter.
3. The pin length shall be 4.06 ± 0.25 (0.160 ± 0.010) and wire strip length 3.81 (0.150).

 Tyco Electronics		Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: SOLDERSLEEVE, MICRO-MINIATURE CONNECTOR, LEAD FREE		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		<i>Raychem</i>			DOCUMENT NO.: D-141-30-LF	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			REV: A	DATE: 7-Mar-07
DRAWN BY: P.TALLY	CAGE CODE : 06090	REPLACES :	DCR NUMBER: ---	SCALE: NTS	SIZE: A	SHEET: 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[D-141-30-LF](#)