

TA78DM05S, TA78DM08S, TA78DM09S, TA78DM12S


5 V, 8 V, 9 V, 12 V

Three-Terminal Low Dropout Voltage Regulator

The TA78DM×S series consists of fixed-positive-output voltage regulator ICs capable of sourcing current of up to 500 mA. Due to the features of low dropout voltage and low standby current, these devices are useful for battery-powered equipment.


Features

- Low standby current of 800 μ A typical.
- Maximum output current of 500 mA.
- Low dropout voltage: 0.75 V (max).
- Multi-protection:
Reverse connection of power supply, 60 V load dump, thermal shut down and current limiting.
- Metal fin (tab) is fully covered with mold resin. (TO-220 NIS package)

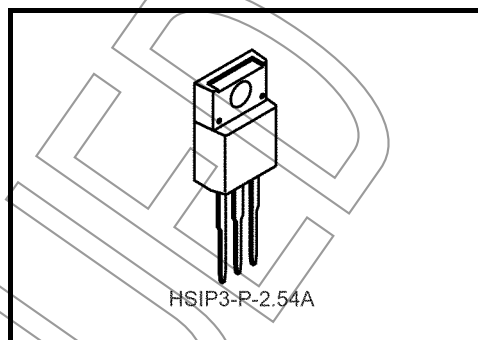


Weight: 1.7 g (typ.)


Pin Assignment



Marking

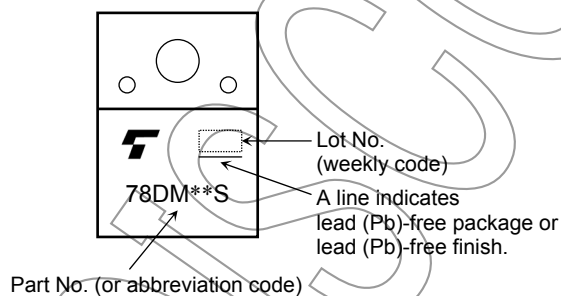

Block Diagram

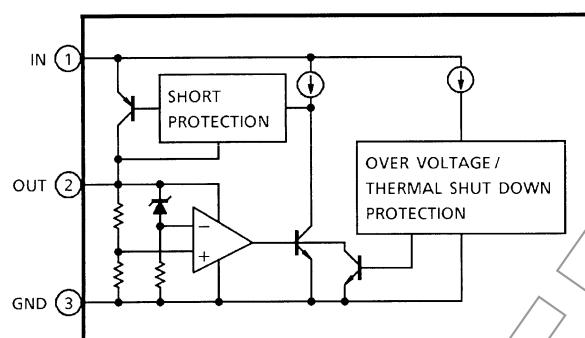

Absolute Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Operating input voltage	V_{IN}	29	V
Input voltage of surge	V_{IN}	60	V
Power dissipation	(Ta = 25°C)	2	W
	(Tc = 25°C)	20	
Operating temperature	T_{opr}	-40~85	°C
Storage temperature	T_{stg}	-55~150	°C
Thermal resistance	$R_{th(j-c)}$	6.25	°C/W
	$R_{th(j-a)}$	62.5	
Storage temperature-time	T_{sol}	260 (10s)	°C

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/Derating Concept and Methods) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

TA78DM05S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = 14\text{ V}$, $I_{OUT} = 250\text{ mA}$, $T_j = 25^\circ\text{C}$, $C_{IN} = 0.1\text{ }\mu\text{F}$, $C_{OUT} = 100\text{ }\mu\text{F}$)

Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Output voltage	V_{OUT}	—	—	4.75	5	5.25	V
			$6\text{ V} \leq V_{IN} \leq 26\text{ V}$, $5\text{ mA} \leq I_{OUT} \leq 250\text{ mA}$	4.7	—	5.3	
Line regulation	Reg-line	—	$6\text{ V} \leq V_{IN} \leq 26\text{ V}$	—	3	30	mV
Load regulation	Reg-load	—	$V_{IN} = 6\text{ V}$, $5\text{ mA} \leq I_{OUT} \leq 500\text{ mA}$	—	66	240	mV
			$V_{IN} = 26\text{ V}$, $5\text{ mA} \leq I_{OUT} \leq 500\text{ mA}$	—	40	240	
Quiescent current	I_B	—	$6\text{ V} \leq V_{IN} \leq 26\text{ V}$, $I_{OUT} = 0\text{ mA}$	—	0.8	1.4	mA
			$6\text{ V} \leq V_{IN} \leq 26\text{ V}$, $I_{OUT} = 250\text{ mA}$	—	14	27	
Dropout voltage	V_D	—	$I_{OUT} = 250\text{ mA}$	—	0.2	0.35	V
			$I_{OUT} = 500\text{ mA}$	—	0.4	0.75	
Short circuit current limit	I_{SC}	—	—	—	0.7	—	A

TA78DM08S
Electrical Characteristics

 (Unless otherwise specified, $V_{IN} = 16\text{ V}$, $I_{OUT} = 250\text{ mA}$, $T_j = 25^\circ\text{C}$, $C_{IN} = 0.1\text{ }\mu\text{F}$, $C_{OUT} = 100\text{ }\mu\text{F}$)

Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Output voltage	V_{OUT}	—	—	7.6	8	8.4	V
			$9\text{ V} \leq V_{IN} \leq 26\text{ V}$, $5\text{ mA} \leq I_{OUT} \leq 250\text{ mA}$	7.52	—	8.48	
Line regulation	Reg-line	—	$9\text{ V} \leq V_{IN} \leq 26\text{ V}$	—	6	48	mV
Load regulation	Reg-load	—	$V_{IN} = 9\text{ V}$, $5\text{ mA} \leq I_{OUT} \leq 500\text{ mA}$	—	54	380	mV
			$V_{IN} = 26\text{ V}$, $5\text{ mA} \leq I_{OUT} \leq 500\text{ mA}$	—	47	380	
Quiescent current	I_B	—	$9\text{ V} \leq V_{IN} \leq 26\text{ V}$, $I_{OUT} = 0\text{ mA}$	—	0.9	1.5	mA
			$9\text{ V} \leq V_{IN} \leq 26\text{ V}$, $I_{OUT} = 250\text{ mA}$	—	16	27	
Dropout voltage	V_D	—	$I_{OUT} = 250\text{ mA}$	—	0.2	0.35	V
			$I_{OUT} = 500\text{ mA}$	—	0.4	0.75	
Short circuit current limit	I_{SC}	—	—	—	0.7	—	A

TA78DM09S

Electrical Characteristics

(Unless otherwise specified, $V_{IN} = 16\text{ V}$, $I_{OUT} = 250\text{ mA}$, $T_j = 25^\circ\text{C}$, $C_{IN} = 0.1\text{ }\mu\text{F}$, $C_{OUT} = 100\text{ }\mu\text{F}$)

Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Output voltage	V_{OUT}	—	—	8.55	9	9.45	V
			$10\text{ V} \leq V_{IN} \leq 26\text{ V}$, $5\text{ mA} \leq I_{OUT} \leq 250\text{ mA}$	8.46	—	9.54	
Line regulation	Reg-line	—	$10\text{ V} \leq V_{IN} \leq 26\text{ V}$	—	9	54	mV
Load regulation	Reg-load	—	$V_{IN} = 10\text{ V}$, $5\text{ mA} \leq I_{OUT} \leq 500\text{ mA}$	—	47	430	mV
			$V_{IN} = 26\text{ V}$, $5\text{ mA} \leq I_{OUT} \leq 500\text{ mA}$	—	50	430	
Quiescent current	I_B	—	$10\text{ V} \leq V_{IN} \leq 26\text{ V}$, $I_{OUT} = 0\text{ mA}$	—	0.9	1.6	mA
			$10\text{ V} \leq V_{IN} \leq 26\text{ V}$, $I_{OUT} = 250\text{ mA}$	—	16	27	
Dropout voltage	V_D	—	$I_{OUT} = 250\text{ mA}$	—	0.2	0.35	V
			$I_{OUT} = 500\text{ mA}$	—	0.4	0.75	
Short circuit current limit	I_{SC}	—	—	—	0.7	—	A


TA78DM12S

Electrical Characteristics

(Unless otherwise specified, $V_{IN} = 18\text{ V}$, $I_{OUT} = 250\text{ mA}$, $T_j = 25^\circ\text{C}$, $C_{IN} = 0.1\text{ }\mu\text{F}$, $C_{OUT} = 100\text{ }\mu\text{F}$)







Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Output voltage	V_{OUT}	—	—	11.4	12	12.6	V
			$13\text{ V} \leq V_{IN} \leq 26\text{ V}$, $5\text{ mA} \leq I_{OUT} \leq 250\text{ mA}$	11.28	—	12.72	
Line regulation	Reg-line	—	$13\text{ V} \leq V_{IN} \leq 26\text{ V}$	—	10	72	mV
Load regulation	Reg-load	—	$V_{IN} = 13\text{ V}$, $5\text{ mA} \leq I_{OUT} \leq 500\text{ mA}$	—	84	580	mV
			$V_{IN} = 26\text{ V}$, $5\text{ mA} \leq I_{OUT} \leq 500\text{ mA}$	—	45	580	
Quiescent current	I_B	—	$13\text{ V} \leq V_{IN} \leq 26\text{ V}$, $I_{OUT} = 0\text{ mA}$	—	1.0	1.7	mA
			$13\text{ V} \leq V_{IN} \leq 26\text{ V}$, $I_{OUT} = 250\text{ mA}$	—	16	27	
Dropout voltage	V_D	—	$I_{OUT} = 250\text{ mA}$	—	0.2	0.35	V
			$I_{OUT} = 500\text{ mA}$	—	0.4	0.75	
Short circuit current limit	I_{SC}	—	—	—	0.7	—	A





Application Circuit

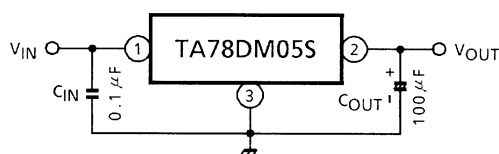

The capacitors C_{IN}/C_{OUT} must be guaranteed to operate within the temperature range in which the regulator operates correctly.

The equivalent series resistance (ESR) of C_{OUT} must be less than $1\text{ }\Omega$ inside the operating temperature range.

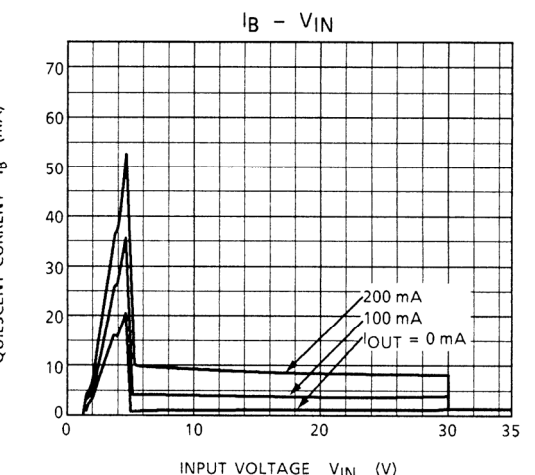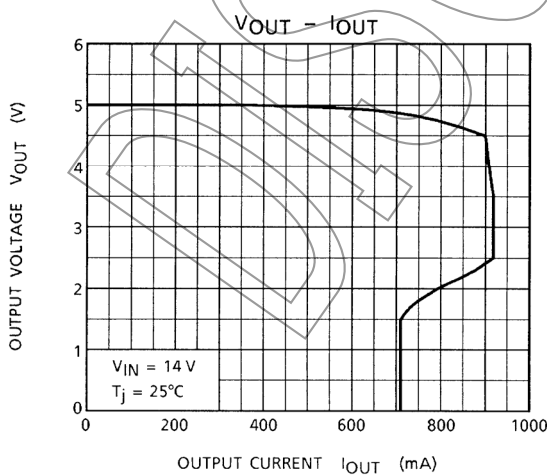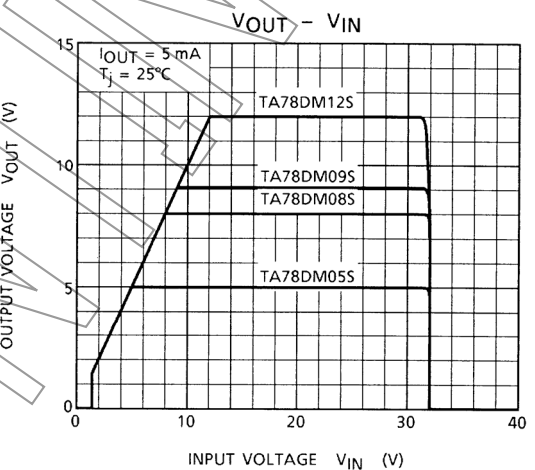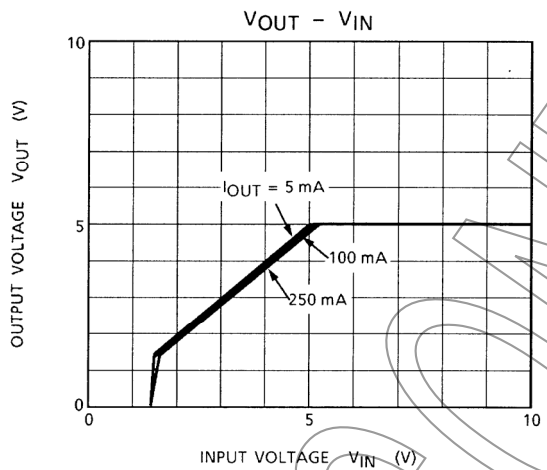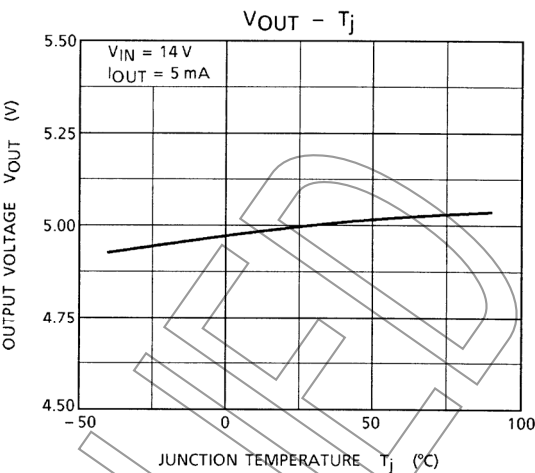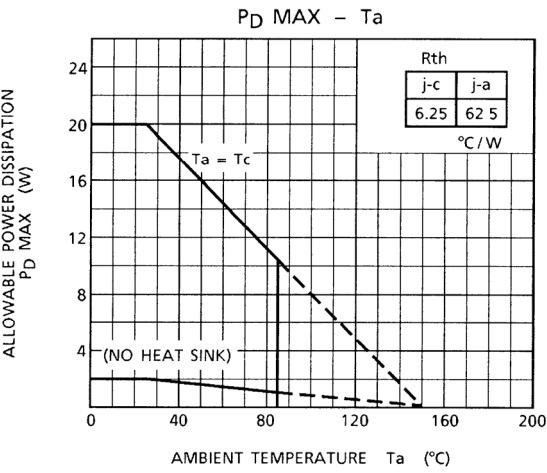


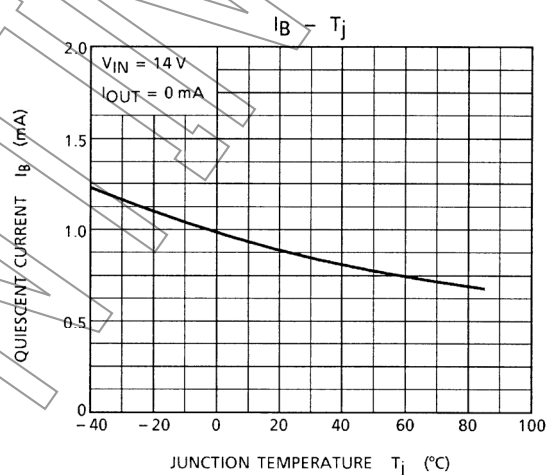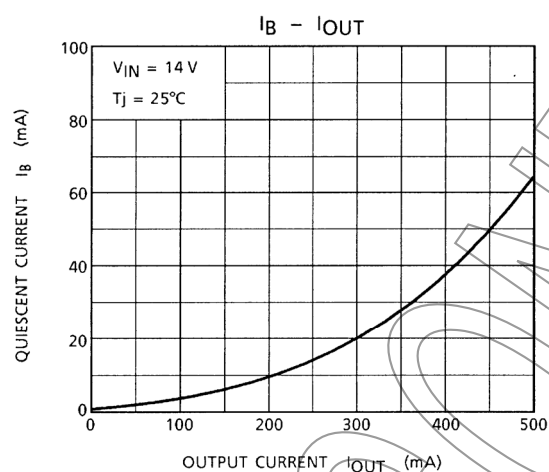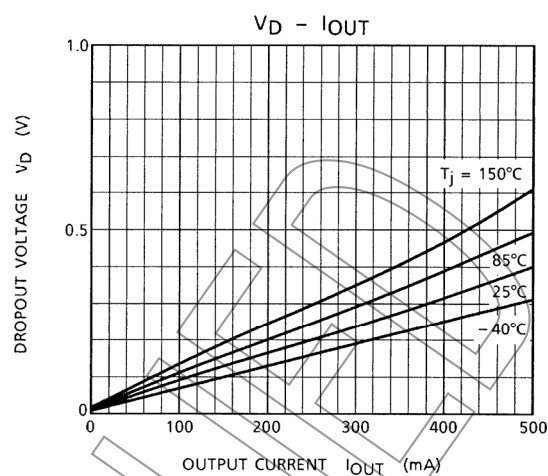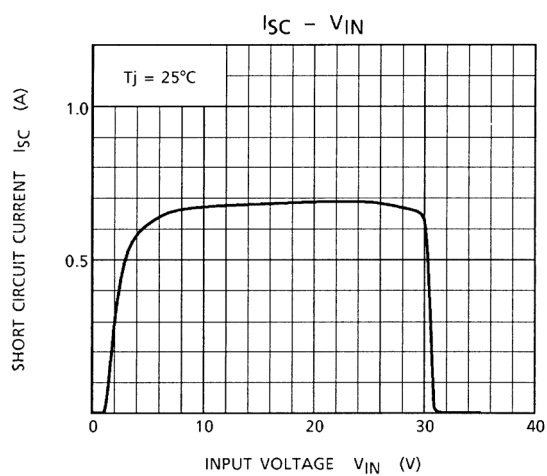

Package Dimensions

HSIP3-P-2.54A

Unit: mm

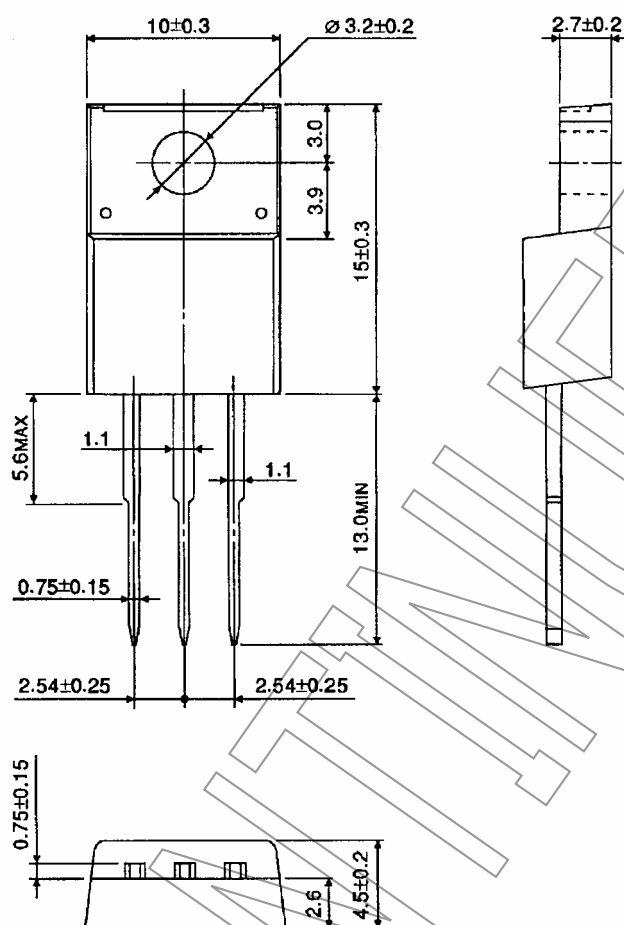

Weight: 1.7 g (typ.)

RESTRICTIONS ON PRODUCT USE

20070701-EN

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.