


UR SERIES

VOLTAGE CONTROL RELAY

UL listed CSA recognized

- **AC or DC Voltage Control**
- **Manual or Automatic Operation**
- **Adjustable Threshold**
- **5 to 50% Hysteresis Range**
- **LED Relay Status Indicator**

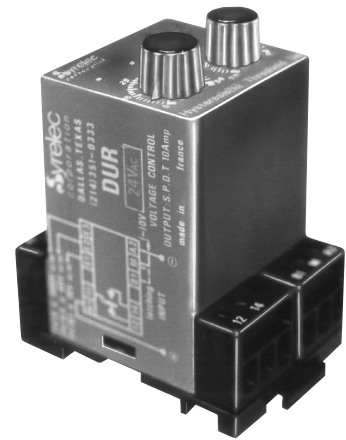


1. AC/DC voltage control without latching:

The output relay is energized when the voltage (AC peak voltage) exceeds the selected threshold. It de-energizes when the voltage falls below the hysteresis setting (5 to 50%) or when supply breaks. The hysteresis is controlled by a potentiometer and its selection does not change the chosen threshold.

2. AC/DC voltage control with latching:

The output relay is energized when the voltage reaches the selected threshold and stays latched in this position. The contact between terminal B1 and M (or 8 or 9) should be opened or the input power of the device interrupted to reset.

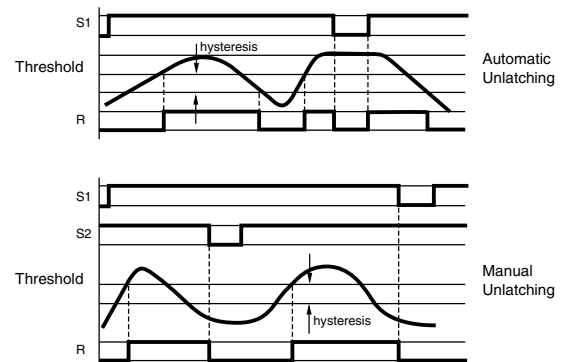

SPECIFICATIONS:

Input	24 VDC, 24, 48, 110, 220 VAC		
	±15%, 50/60 Hz		
Power consumption	24 VAC: 1 VA		
	48 VAC: 1.2 VA		
	110 VAC: 3.5 VA		
	220 VAC: 7 VA		
Control Range	Input Resistance	Acceptance load (input)	
AC or DC		Permanent	Less than
0.1 to 10 V	10 kΩ	(max)	10ms peak max.
0.4 to 40 V	40 kΩ	50 V	100 V
4 to 400 V	400 kΩ	100 V	300 V
		440 V	750 V
Hysteresis selection	5 to 50% of set point		
Repeat accuracy	±2% at a constant ambient		
Output Relay	SPDT Relay		
Contact material	AgCdO		
Maximum loading	10 A AC resistive 8 A DC inductive		
Maximum switching voltage	250 VAC		250 VDC
Relay maximum power rating	2200 VA		
Transient protection	2500 volts		30 W
Mechanical life of relay	30 x 10 ⁶ operations		
Electrical life of relay	2 x 10 ⁵ at 2400 VA resistive load		
Repetition accuracy	±0.5% at a constant ambient		
Response time	100 ms on make		
	200 ms on break		
Operating temperature	-4°F to +140°F		-20°C to +60°C
Weight	7 oz. (200g)		

Option: 24 VDC power – the voltage and the measured current must be from separate sources.

ORDERING INFORMATION:

D
MOUNTING

MOUNTING
D = DIN-rail mounting
L = 11 pin plug-in


UR
SERIES

SERIES
UR
UR SP50

24A
INPUT POWER

INPUT POWER
24A = 24VAC
24D = 24VDC
48A = 48VAC
110A = 110VAC
220A = 220VAC

WIRING DIAGRAM:

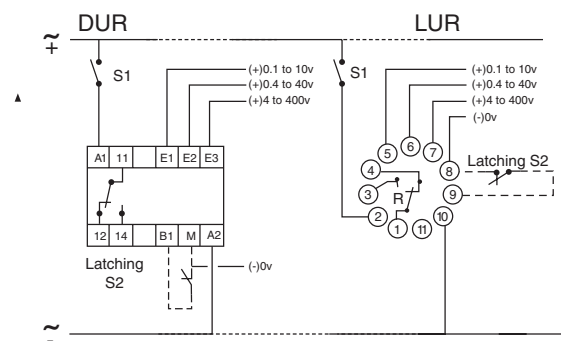


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com


SR SERIES

UNDER VOLTAGE RELAY

UL listed CSA recognized

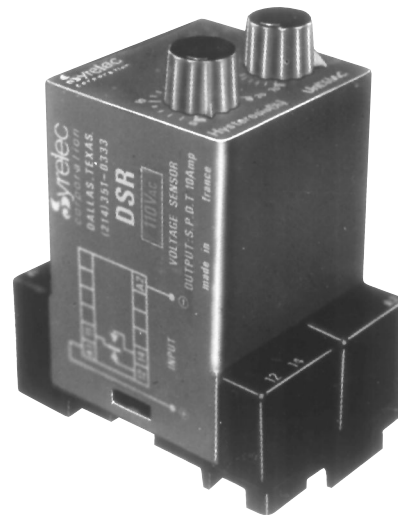


- **Multiple AC/DC Voltages**
- **5 to 20% Hysteresis Adjustment**
- **Automatic Operation**
- **Adjustable Threshold**

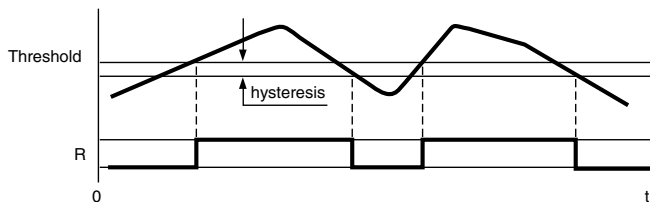


The voltage threshold SR Relay controls a voltage supply which is its own supply. The output relay is energized when the supply (effective for AC) exceeds the selected threshold. It de-energizes when the controlled supply falls below (5 to 20% Hysteresis) of the supply voltage or when the input power breaks. Hysteresis is controlled by a potentiometer and its selection does not change the chosen threshold. Pulses or drops of 100ms or less are ignored.

SPECIFICATIONS:

Input	12 VDC, 24 VAC, 24 VDC, 48 VAC 48 VDC, 110 VAC, 220 VAC, 50/60 Hz -20% to +30% DC, -30% to +15% AC
Maximum power consumption	24 VAC: 1.5 VA 24 VDC: .6 W 48 VAC: 2 VA 24 VDC: .8 W 110 VAC: 5 VA 48 VDC: 1.8 W 220 VAC: 11 VA
Residual ripple	<Hysteresis value
Output relay	.SPDT Relay
Contact material	AgCdO
Maximum loading	10 A AC resistive 8 A DC inductive
Maximum switching voltage	250 VAC 250 VDC
Maximum power rating	2200 VA 80 W
Mechanical life of relay	.30 x 10 ⁶ operations
Electrical life of relay	.2 x 10 ⁶ at 2200 VA resistive load
Operating temperature	+14°F to 140°F -10°C to +60°C
Weight	.2.8 oz. (100g)

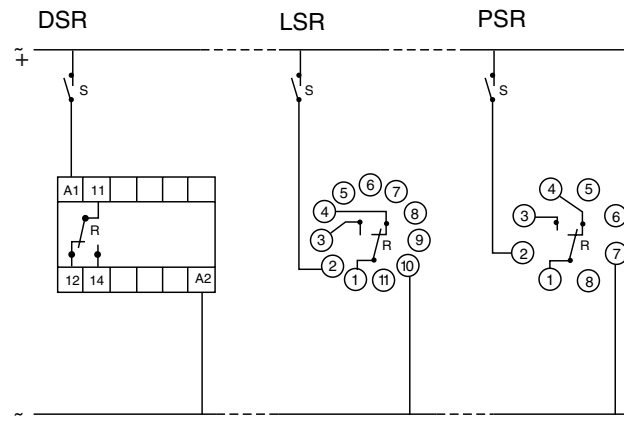

ORDERING INFORMATION:

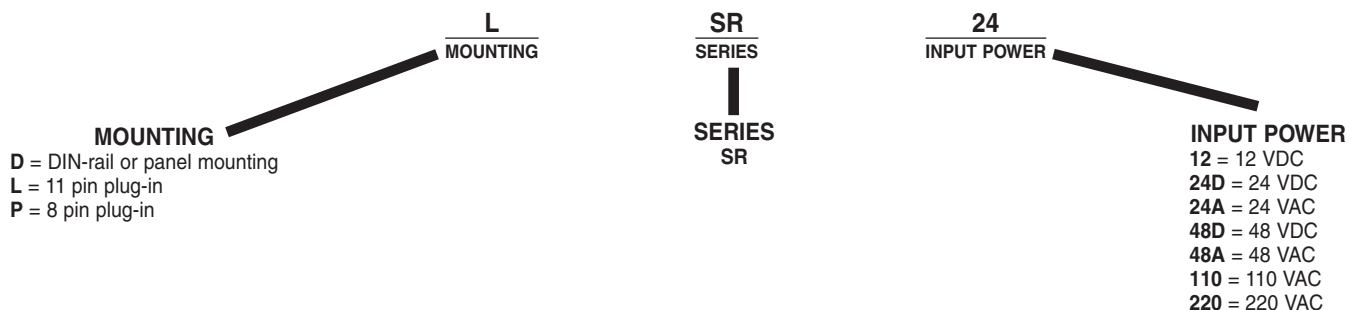

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Crouzet:

[LUR110A](#) [LUR24D](#) [DUR220A](#) [DUR24D](#) [DUR110A](#) [LSR110A](#) [DUR24A](#) [LSR24D](#) [DSR12D](#) [LSR24A](#) [LUR24A](#)
[LUR220A](#) [LSR12D](#) [PSR24A](#) [DSR110A](#) [DSR220A](#) [DSR24D](#)