

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [45802-2007](#)
Status: **Active**
Overview: [HD Mezz™](#)
Description: 1.20mm by 2.00mm Pitch HD Mezz™ Receptacle, 91 Circuits, 10.00mm Unmated Height, 7 Rows, Tin-Lead

Documents:	
3D Model	Product Specification PS-45802-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Receptacles
Series	45802
Application	Board-to-Board, Signal
Comments	1.20mm Pitch Pin-to-Pin and 2.00mm Pitch Row-to-Row
Overview	HD Mezz™
Product Name	Mezzanine
UPC	883906088934

Physical

Circuits (Loaded)	91
Circuits (maximum)	91
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin-Lead
Material - Resin	High Temperature Thermoplastic
Net Weight	6.387/g
Number of Rows	7
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Vacuum Pick-Up Tape
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Surface Mount
Unmated Height	10.00mm

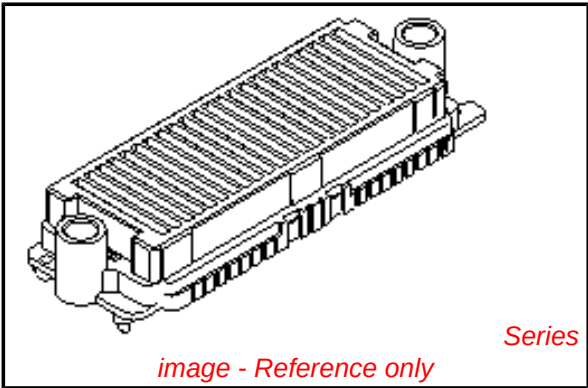

EU RoHS
Not RoHS Compliant
REACH SVHC
Not Reviewed
Low-Halogen Status
Low-Halogen



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[45802Series](#)

Mates With
[45830](#) HD Mezz™ Plug

Electrical

Current - Maximum per Contact	2A
Grounding to PCB	No
Voltage - Maximum	250V AC

Solder Process Data

Duration at Max. Process Temperature (seconds)	20
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	2
Process Temperature max. C	260
Replacement RoHS Compliant Part Number	0458022207

Material Info

Reference - Drawing Numbers

Product Specification	PS-45802-001
Sales Drawing	SD-45802-0001, SD-45802-0002

This document was generated on 10/11/2012

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION