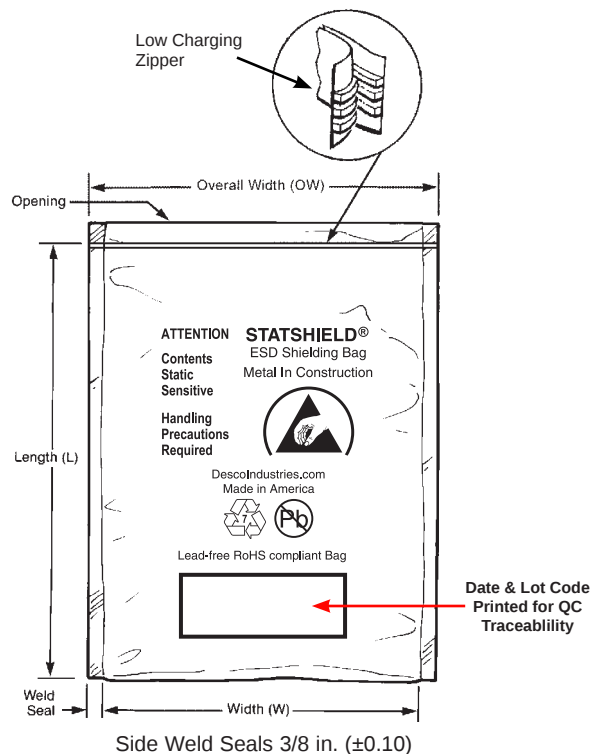


#### Mixed Unsortable Plastic Scrap

Mixed unsortable plastic scrap shall contain assorted plastics of multiple grades that are co-extruded, bonded or laminated together which are unsortable into individual grades

**Desco's bags are recyclable**

Statshield® bags are packaged 100 per package in an oversized shielding bag.  
See Shielding Bag Storage at [TB-7507](#).

# DESCO

## STATSHIELD® METAL-IN SERIES

Meets the required limits of ANSI/ESD S20.20, Packaging standard ANSI/ESD S541, and Static Control Bag standard ANSI/ESD S11.4-2012 Level 3.



### Specifications:

#### Electrical Properties

Surface Resistance:  
Outer Surface  
Inner Surface  
Discharge Shielding  
Charge Generation

Capacitance Probe (to dissipate 1 KV)

#### Typical Values

$1 \times 10^4$  to  $< 1 \times 10^{11}$  ohms  
 $1 \times 10^4$  to  $< 1 \times 10^{11}$  ohms  
<20 nJ  
Teflon: 0.09 nC/sq. in.  
Quartz: 0.01 nC/sq. in.  
<30 volts

#### Test Procedures/Method

ANSI/ESD STM11.11  
ANSI/ESD STM11.11  
ANSI/ESD STM11.31, EIA 541  
Modified Incline Plane  
Modified Incline Plane  
ANSI/EIA-541/Appendix E, 1kV Discharge

#### Physical Properties

Bag Thickness:

Thickness  
Width (Inside Dimensions)  
Length (Inside Dimensions)  
Light Transmission  
Heat Seal  
Tensile  
Puncture Resistance  
MVTR  
Silicone and Amine content

Nominal .0030" (.0762mm)  $\pm 10\%$   
Nominal -0" / + 0.125"  
Nominal  $\pm 0.125$ "  
>40% (Tobias)  
>10 lbs/in  
9000 PSI  
>10 lbs  
<0.40  
Not detected

MIL-STD-3010, 1003

ASTM D-1003  
375°F, 1/2 sec 60 psi  
ASTM D882  
MIL-STD-3010, 2065  
FTMS 101C/2065  
ASTM E168

#### Chemical Properties

Polycarbonate compatible: Contains no Amines, Amides, or N-Octanoic Acid.

Bag is free of amines, N-octanoic acid, silicones and heavy metals.

#### ANSI/ESD S541 Section 6.2 Outside an EPA

"Transportation of sensitive products outside of an EPA shall require packaging that provides:

1. Low charge generation
2. Dissipative or conductive materials for intimate contact
3. A structure that provides electrostatic discharge shielding."

#### RoHS 2 and REACH Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2012/12/19 are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See Desco [Limited Warranty at Desco.com](#).

The bag's material meets the required limits of ANSI/ESD S541 per ANSI/ESD S20.20.

Statshield® and Statfree® are Registered Trademarks of Desco Industries Inc.  
See Bag Selection Chart Click [HERE](#)



\*Made in the  
United States of America

Specifications and procedures subject to change without notice.

\*Film made in USA or Malaysia

### STATSHIELD® BAG, SHIELDING, METAL-IN CONSTRUCTION, ZIPPER, .0030" (.0762mm)

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: [Desco.com](#)  
PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407  
PHONE (781) 821-8370

**DRAWING  
NUMBER**  
13605

**DATE:**  
March  
2014