

Schottky Barrier Rectifier

FEATURES

- Low forward voltage drop
- Low power loss, high efficiency
- Guardring for overvoltage protection
- High surge current capability
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition


DO-204AL (DO-41)

MECHANICAL DATA

Case: DO-204AL (DO-41)

Molding compound, UL flammability classification rating 94V-0

Base P/N with suffix "G" on packing code - green compound (halogen-free)

Terminal: Matte tin plated leads, solderable per JESD22-B102

Meet JESD 201 class 1A whisker test

Weight: 0.33g (approximately)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)											
PARAMETER	SYMBOL	SR 002	SR 003	SR 004	SR 005	SR 006	SR 009	SR 010	UNIT		
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	90	100	V		
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	63	70	V		
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	90	100	V		
Maximum average forward rectified current	$I_{F(AV)}$	0.5						A			
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	30						A			
Maximum instantaneous forward voltage (Note 1) @ 0.5 A	V_F	0.55		0.70		0.85		V			
Maximum reverse current @ rated VR $T_J=25^\circ\text{C}$ $T_J=100^\circ\text{C}$ $T_J=125^\circ\text{C}$	I_R	0.5			0.1			mA			
		10		5		-					
		-		-		2					
Typical junction capacitance (Note 2)	C_J	110		80		65		pF			
Typical thermal resistance	$R_{\theta JA}$	50						$^\circ\text{C}/\text{W}$			
Operating junction temperature range	T_J	- 55 to +125			- 55 to +150			$^\circ\text{C}$			
Storage temperature range	T_{STG}	- 55 to +150						$^\circ\text{C}$			

Note 1: Pulse test with $PW=300\mu\text{s}$, 1% duty cycle

Note 2: Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.

ORDERING INFORMATION

PART NO.	PACKING CODE	GREEN COMPOUND CODE	PACKAGE	PACKING
SR0xx (Note 1)	A0	Suffix "G"	DO-41	3,000 / Ammo box (52mm taping)
	R0		DO-41	5,000 / 13" Paper reel
	R1		DO-41	5,000 / 13" Paper reel (Reverse)
	B0		DO-41	1,000 / Bulk packing

Note 1: "xx" defines voltage from 20V (SR002) to 100V (SR010)

EXAMPLE

PREFERRED P/N	PART NO.	PACKING CODE	GREEN COMPOUND CODE	DESCRIPTION
SR006 A0	SR006	A0		
SR006 A0G	SR006	A0	G	Green compound

RATINGS AND CHARACTERISTICS CURVES

(TA=25°C unless otherwise noted)

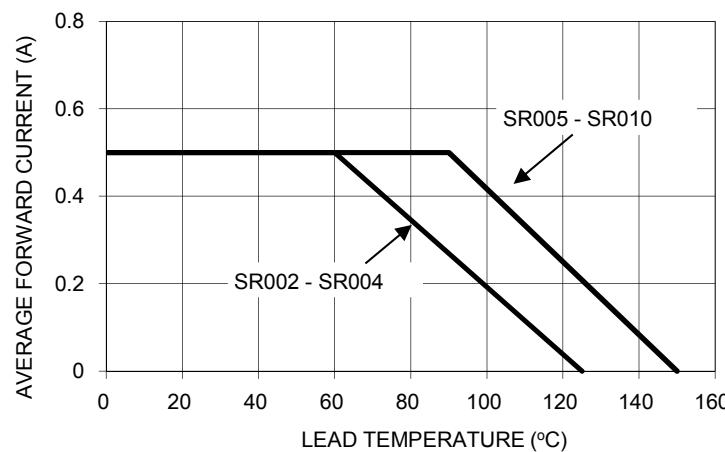
FIG.1- FORWARD CURRENT DERATING CURVE

FIG. 2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

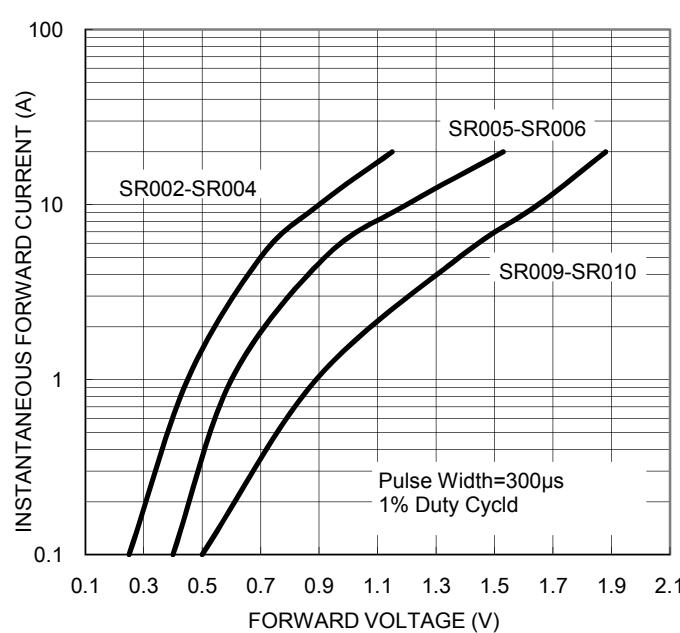
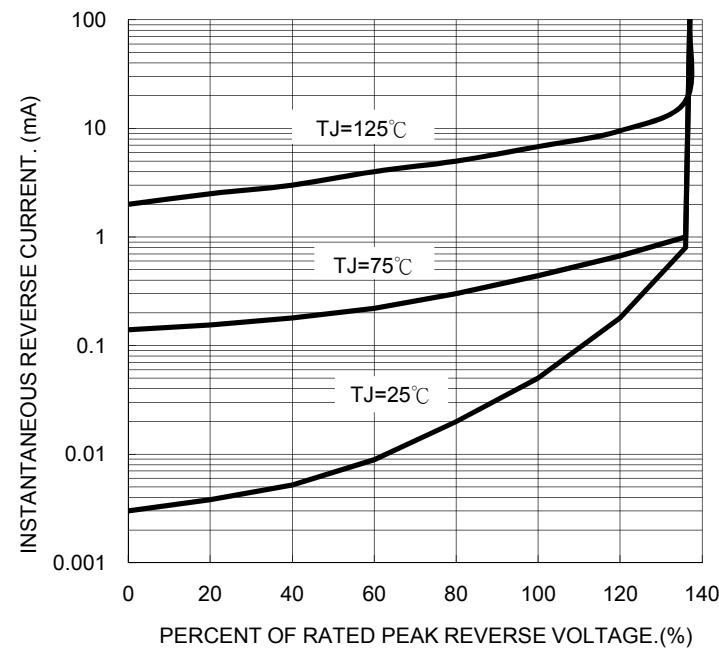
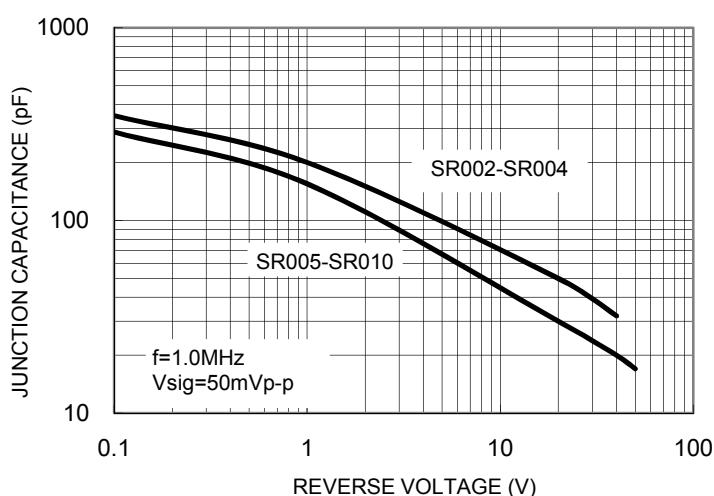
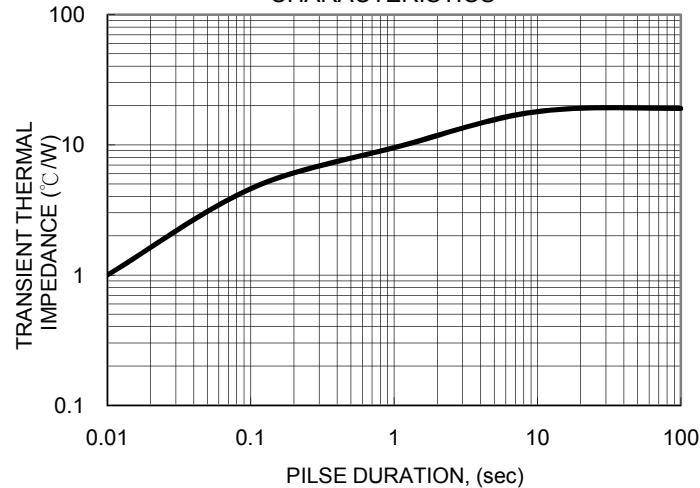
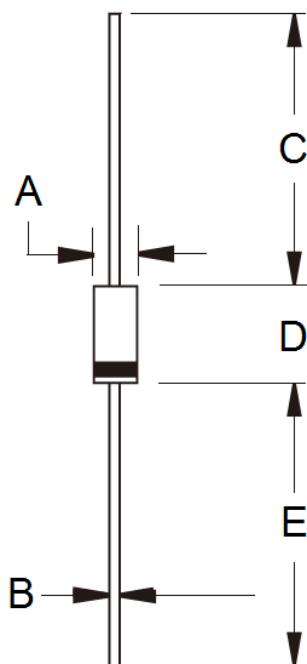
FIG. 3- TYPICAL FORWARD CHARACTERISTICS

FIG. 4 TYPICAL REVERSE CHARACTERISTICS


FIG. 5- TYPICAL JUNCTION CAPACITANCE

FIG. 6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

PACKAGE OUTLINE DIMENSIONS


DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	2.00	2.70	0.079	0.106
B	0.71	0.86	0.028	0.034
C	25.40	-	1.000	-
D	4.20	5.20	0.165	0.205
E	25.40	-	1.000	-

MARKING DIAGRAM


P/N = Specific Device Code

G = Green Compound

YWW = Date Code

F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Taiwan Semiconductor:](#)

[SR015 R0](#)