

## Fast Recovery Diodes (Stud Version), 40 A/70 A/85 A


**DO-203AB (DO-5)**

### FEATURES

- Short reverse recovery time
- Low stored charge
- Wide current range
- Excellent surge capabilities
- Stud cathode and stud anode versions
- Types up to 100 V<sub>RRM</sub>
- Compliant to RoHS directive 2002/95/EC


**RoHS  
COMPLIANT**

### TYPICAL APPLICATIONS

- DC power supplies
- Inverters
- Converters
- Choppers
- Ultrasonic systems
- Freewheeling diodes

### PRODUCT SUMMARY

$I_{F(AV)}$	40 A/70 A/85 A
-------------	----------------

### MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	40HFL	70HFL	85HFL	UNITS
$I_{F(AV)}$		40	70	85	A
	Maximum $T_C$	85	85	85	°C
$I_{FSM}$	50 Hz	400	700	1100	A
	60 Hz	420	730	1151	
$I^2t$	50 Hz	800	2450	6050	$A^2s$
	60 Hz	730	2240	5523	
$I^2\sqrt{t}$		11 300	34 650	85 560	$A^2\sqrt{s}$
$V_{RRM}$	Range	100 to 1000			V
$t_{rr}$		See Recovery Characteristics table			ns
$T_J$	Range	- 40 to 125			°C

# 40HFL, 70HFL, 85HFL Series

Vishay High Power Products

Fast Recovery Diodes  
(Stud Version), 40 A/70 A/85 A



## ELECTRICAL SPECIFICATIONS

<b>VOLTAGE RATINGS</b>				
<b>TYPE NUMBER<sup>(1)</sup></b>	<b><math>V_{RRM}</math>, MAXIMUM PEAK REPETITIVE REVERSE VOLTAGE <math>T_J = -40^\circ\text{C}</math> TO <math>125^\circ\text{C}</math></b>	<b><math>V_{RSM}</math>, MAXIMUM PEAK NON-REPETITIVE REVERSE VOLTAGE <math>T_J = 25^\circ\text{C}</math> TO <math>125^\circ\text{C}</math></b>	<b><math>I_{FM}</math>, MAXIMUM PEAK REVERSE CURRENT AT RATED <math>V_{RRM}</math> mA</b>	
	<b><math>V</math></b>	<b><math>V</math></b>	<b><math>T_J = 25^\circ\text{C}</math></b>	<b><math>T_J = 125^\circ\text{C}</math></b>
40HFL10S02, 40HFL10S05, 40HFL10S10	100	150		
40HFL20S02, 40HFL20S05, 40HFL20S10	200	300		
40HFL40S02, 40HFL40S05, 40HFL40S10	400	500		
40HFL60S02, 40HFL60S05, 40HFL60S10	600	700	0.1	10
40HFL80S05, 40HFL80S10	800	900		
40HFL100S05, 40HFL100S10	1000	1100		
70HFL10S02, 70HFL10S05, 70HFL10S10	100	150		
70HFL20S02, 70HFL20S05, 70HFL20S10	200	300		
70HFL40S02, 70HFL40S05, 70HFL40S10	400	500	0.1	15
70HFL60S02, 70HFL60S05, 70HFL60S10	600	700		
70HFL80S05, 70HFL80S10	800	900		
70HFL100S05, 70HFL100S10	1000	1100		
85HFL10S02, 85HFL10S05, 85HFL10S10	100	150		
85HFL20S02, 85HFL20S05, 85HFL20S10	200	300		
85HFL40S02, 85HFL40S05, 85HFL40S10	400	500		
85HFL60S02, 85HFL60S05, 85HFL60S10	600	700	0.1	20
85HFL80S05, 85HFL80S10	800	900		
85HFL100S05, 85HFL100S10	1000	1100		

### Note

<sup>(1)</sup> Types listed are cathode case, for anode case add "R" to code, i.e. 40HFLR20S02, 85HFLR100S05 etc.



# 40HFL, 70HFL, 85HFL Series

Fast Recovery Diodes Vishay High Power Products  
(Stud Version), 40 A/70 A/85 A

FORWARD CONDUCTION								
PARAMETER	SYMBOL	TEST CONDITIONS			40HFL	70HFL	85HFL	UNITS
Maximum average forward current at maximum case temperature	$I_{F(AV)}$	180° conduction, half sine wave			40	70	85	A
					75			°C
Maximum RMS forward current	$I_{F(RMS)}$				63	110	134	A
Maximum peak repetitive forward current	$I_{FRM}$	Sinusoidal half wave, 30° conduction			220	380	470	A
Maximum peak, one-cycle non-repetitive forward current	$I_{FSM}$	$t = 10 \text{ ms}$	Sinusoidal half wave, 100 % $V_{RRM}$ reapplied, initial $T_J = T_J$ maximum			400	700	1100
		$t = 8.3 \text{ ms}$				420	730	1151
		$t = 10 \text{ ms}$	Sinusoidal half wave, no voltage reapplied, initial $T_J = T_J$ maximum			475	830	1308
		$t = 8.3 \text{ ms}$				500	870	1369
Maximum $I^2t$ for fusing	$I^2t$	$t = 10 \text{ ms}$	100 % $V_{RRM}$ reapplied, initial $T_J = T_J$ maximum			800	2450	6050
		$t = 8.3 \text{ ms}$				730	2240	5523
		$t = 10 \text{ ms}$	No voltage reapplied, initial $T_J = T_J$ maximum			1130	3460	8556
		$t = 8.3 \text{ ms}$				1030	3160	7810
Maximum $I^2\sqrt{t}$ for fusing <sup>(1)</sup>	$I^2\sqrt{t}$	$t = 0.1 \text{ ms to } 10 \text{ ms, no voltage reapplied}$			11 300	34 650	85 560	$\text{A}^2\sqrt{\text{s}}$
Maximum value of threshold voltage	$V_{F(TO)}$	$T_J = 125 \text{ }^\circ\text{C}$			1.081	1.085	1.128	V
Maximum value of forward slope resistance	$r_F$				6.33	3.40	2.11	$\text{m}\Omega$
Maximum forward voltage drop	$V_{FM}$	$T_J = 25 \text{ }^\circ\text{C, } I_{FM} = \pi \times I_{F(AV)}$			1.95	1.85	1.75	V

**Note**

<sup>(1)</sup>  $I^2t$  for time  $t_x = I^2\sqrt{t} \cdot \sqrt{t_x}$

RECOVERY CHARACTERISTICS											
PARAMETER	SYMBOL	TEST CONDITIONS	40HFL...			70HFL...			85HFL...		
			S02	S05	S10	S02	S05	S10	S02	S05	S10
Typical reverse recovery time	$t_{rr}$	$T_J = 25 \text{ }^\circ\text{C, } I_F = 1 \text{ A to } V_R = 30 \text{ V, } -dI_F/dt = 100 \text{ A}/\mu\text{s}$	70	180	350	60	150	290	50	120	270
		$T_J = 25 \text{ }^\circ\text{C, } -dI_F/dt = 25 \text{ A}/\mu\text{s, } I_{FM} = \pi \times \text{rated } I_{F(AV)}$	200	500	1000	200	500	1000	200	500	1000
Typical reverse recovered charge	$Q_{rr}$	$T_J = 25 \text{ }^\circ\text{C, } I_F = 1 \text{ A to } V_R = 30 \text{ V, } -dI_F/dt = 100 \text{ A}/\mu\text{s}$	160	750	3100	90	500	1600	70	340	1350
		$T_J = 25 \text{ }^\circ\text{C, } -dI_F/dt = 25 \text{ A}/\mu\text{s, } I_{FM} = \pi \times \text{rated } I_{F(AV)}$	240	1300	6000	240	1300	6000	240	1300	6000

# 40HFL, 70HFL, 85HFL Series

Vishay High Power Products

Fast Recovery Diodes  
(Stud Version), 40 A/70 A/85 A



## THERMAL AND MECHANICAL SPECIFICATIONS

PARAMETER	SYMBOL	TEST CONDITIONS	40HFL	70HFL	85HFL	UNITS	
Junction operating temperature range	$T_J$		- 40 to 125			$^{\circ}\text{C}$	
Storage temperature range	$T_{\text{Stg}}$		- 40 to 150				
Maximum thermal resistance, junction to case	$R_{\text{thJC}}$	DC operation	0.60	0.36	0.30	$\text{K/W}$	
Maximum thermal resistance, case to heatsink	$R_{\text{thCS}}$		0.25				
Maximum allowable mounting torque (+ 0 %, - 10 %)		Not lubricated thread, tightening on nut <sup>(1)</sup>	3.4 (30)			$\text{N} \cdot \text{m}$ (lbf · in)	
		Lubricated thread, tightening on nut <sup>(1)</sup>	2.3 (20)				
		Not lubricated thread, tightening on hexagon <sup>(2)</sup>	4.2 (37)				
		Lubricated thread, tightening on hexagon <sup>(2)</sup>	3.2 (28)				
Approximate weight			25				
			0.88				
Case style		JEDEC	DO-203AB (DO-5)				

### Notes

(1) Recommended for pass-through holes

(2) Recommended for holed threaded heatsinks

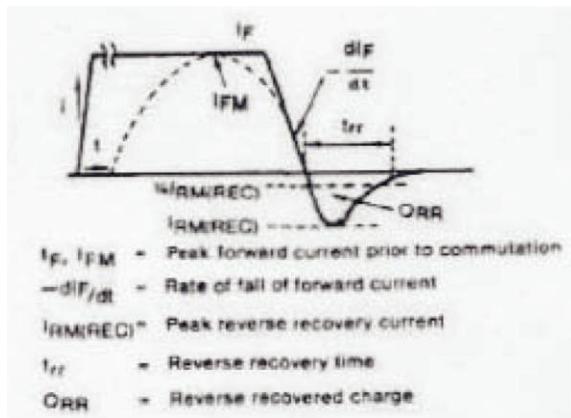


Fig. 1 - Reverse Recovery Time Test Waveform

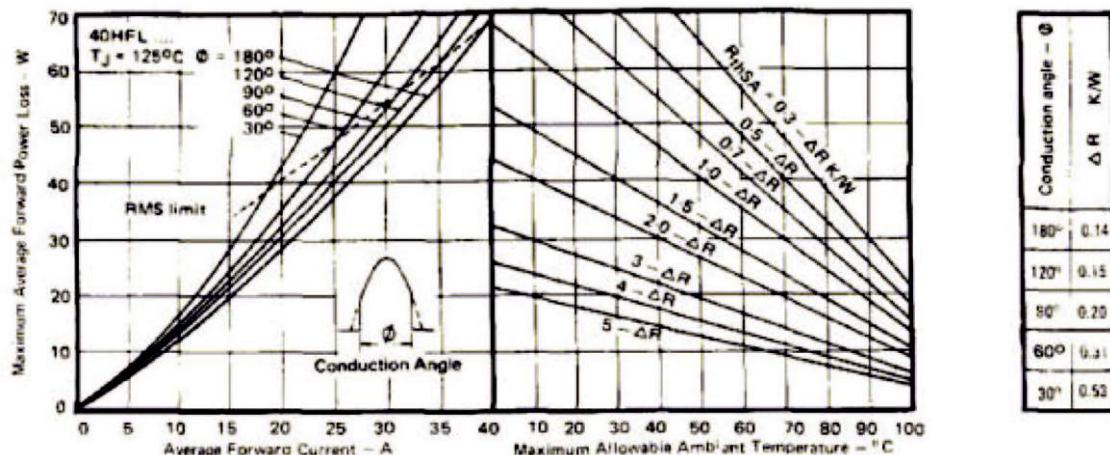


Fig. 2 - Current Rating Nomogram (Sinusoidal Waveforms), 40HFL Series

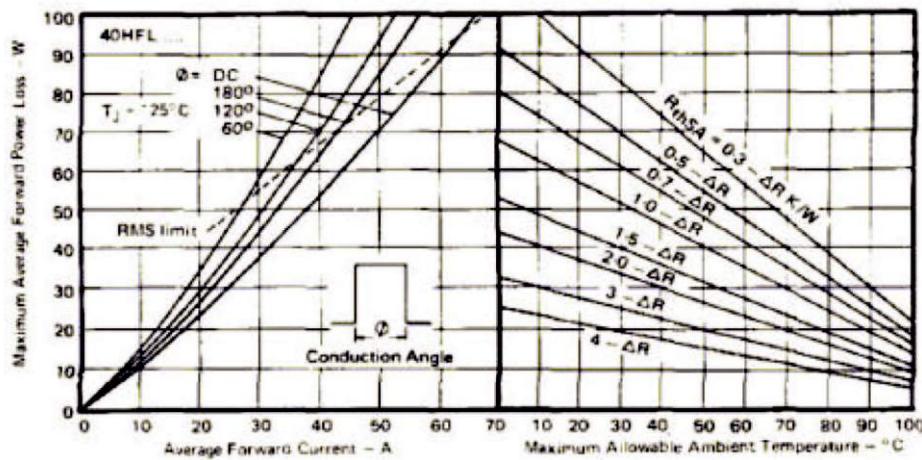


Fig. 3 - Current Rating Nomogram (Rectangular Waveforms), 40HFL Series

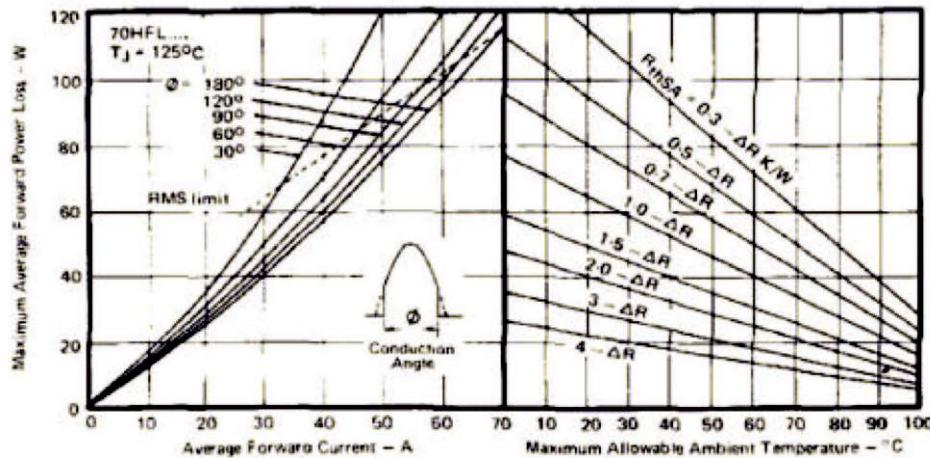


Fig. 4 - Current Rating Nomogram (Sinusoidal Waveforms), 70HFL Series

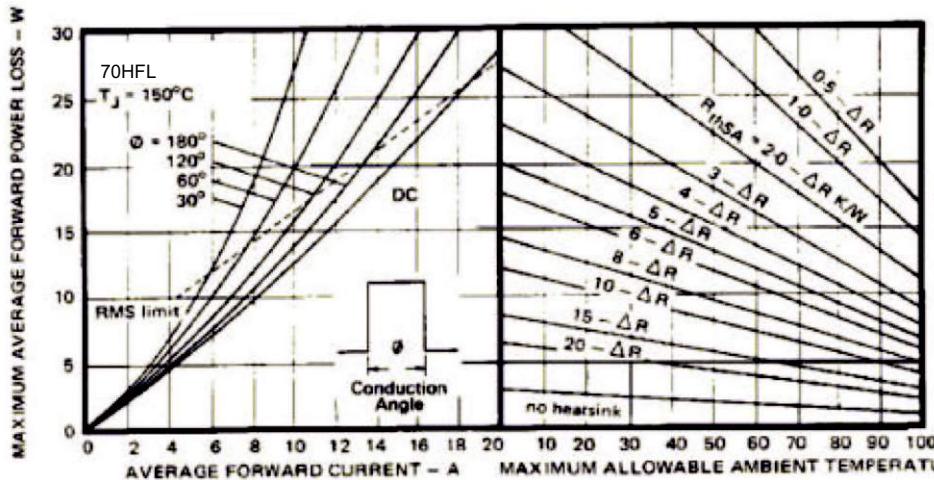


Fig. 5 - Current Rating Nomogram (Rectangular Waveforms), 70HFL Series

# 40HFL, 70HFL, 85HFL Series

Vishay High Power Products

Fast Recovery Diodes  
(Stud Version), 40 A/70 A/85 A

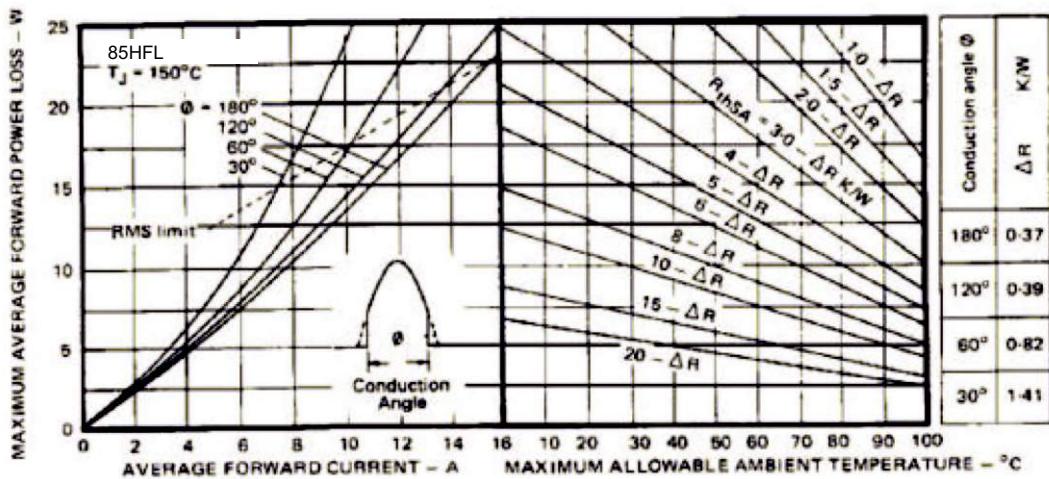


Fig. 6 - Current Rating Nomogram (Sinusoidal Waveforms), 85HFL Series

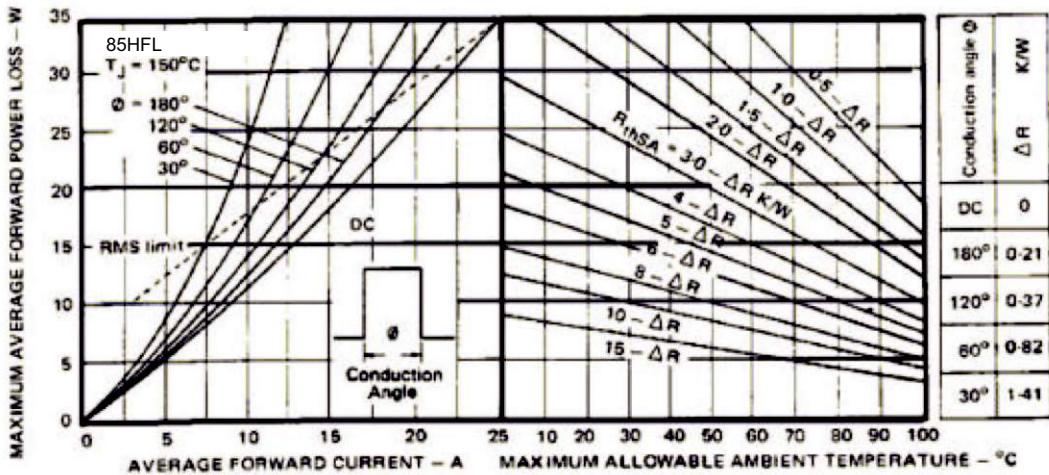


Fig. 7 - Current Rating Nomogram (Rectangular Waveforms), 85HFL Series

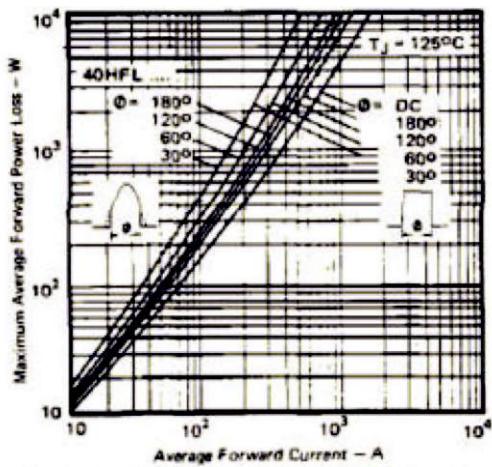


Fig. 8 - Maximum High Level Forward Power Loss vs.  
Average Forward Current, 40HFL Series

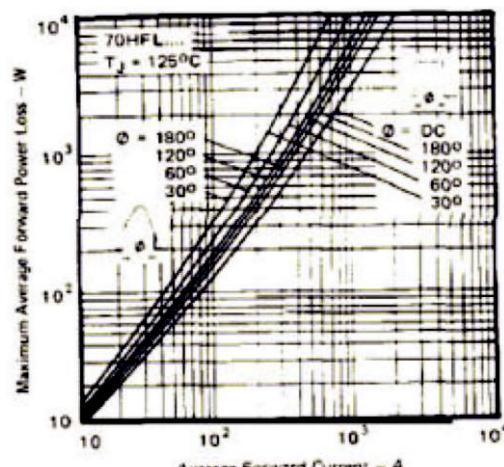


Fig. 9 - Maximum High Level Forward Power Loss vs.  
Average Forward Current, 70HFL Series

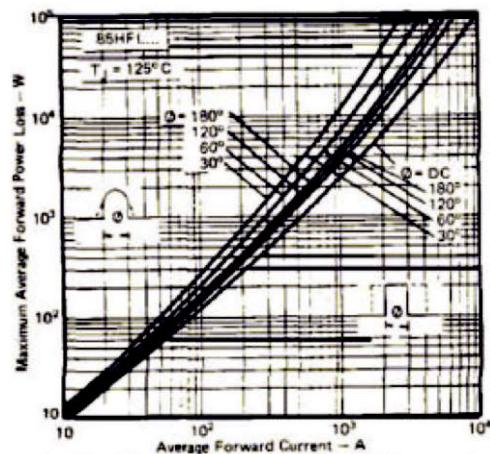


Fig. 10 - Maximum High Level Forward Power Loss vs.  
Average Forward Current, 85HFL Series

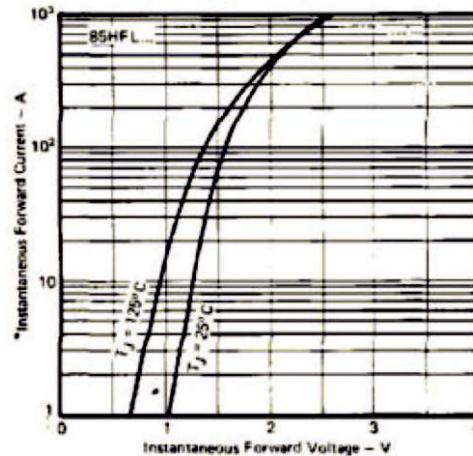


Fig. 13 - Maximum Forward Voltage vs. Forward Current,  
85HFL Series

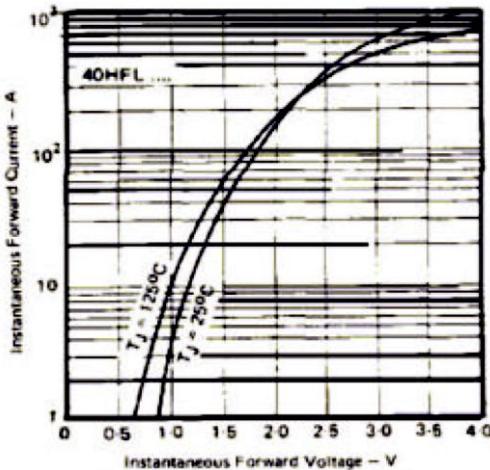


Fig. 11 - Maximum Forward Voltage vs. Forward Current,  
40HFL Series

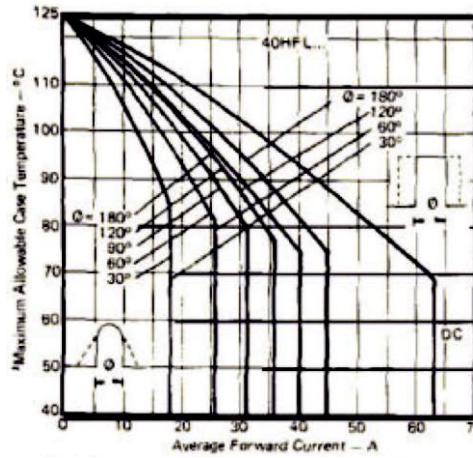


Fig. 14 - Average Forward Current vs. Maximum Allowable  
Case Temperature, 40HFL Series

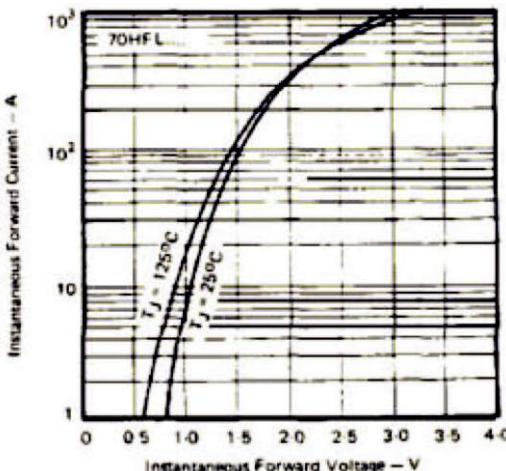


Fig. 12 - Maximum Forward Voltage vs. Forward Current,  
70HFL Series

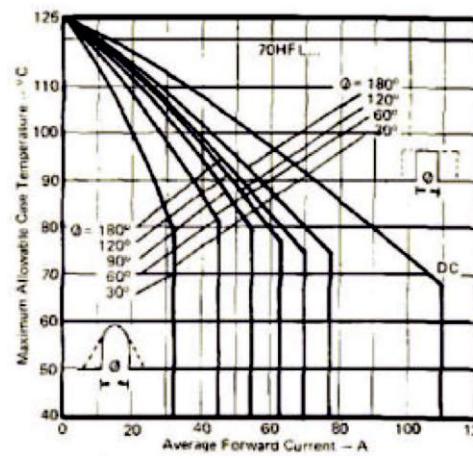


Fig. 15 - Average Forward Current vs. Maximum Allowable  
Case Temperature, 70HFL Series

# 40HFL, 70HFL, 85HFL Series

Vishay High Power Products

Fast Recovery Diodes  
(Stud Version), 40 A/70 A/85 A

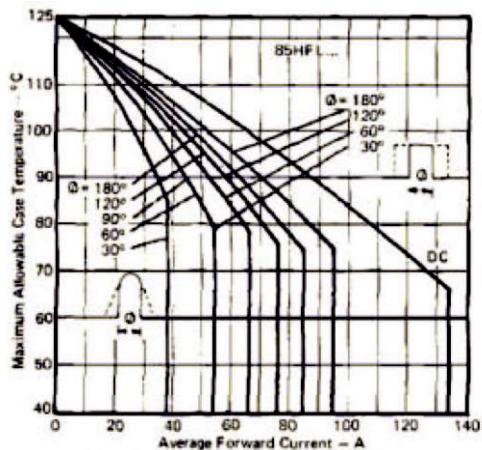


Fig. 16 - Average Forward Current vs. Maximum Allowable Case Temperature, 85HFL Series

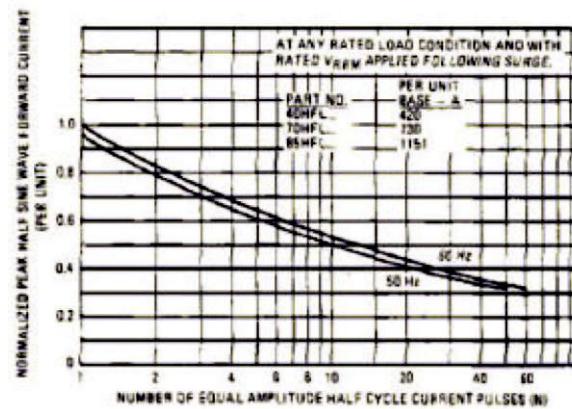


Fig. 17 - Maximum Non-Repetitive Surge Current vs. Number of Current Pulses, All Series

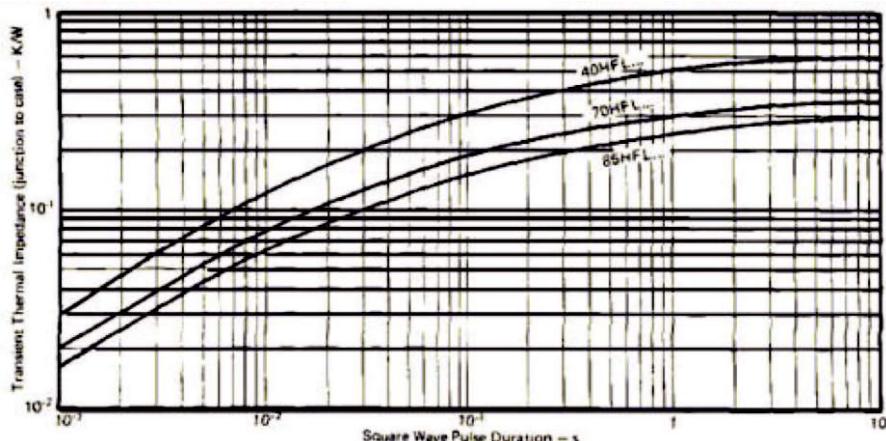


Fig. 18 - Maximum Transient Thermal Impedance, Junction to Case vs. Pulse Duration, All Series

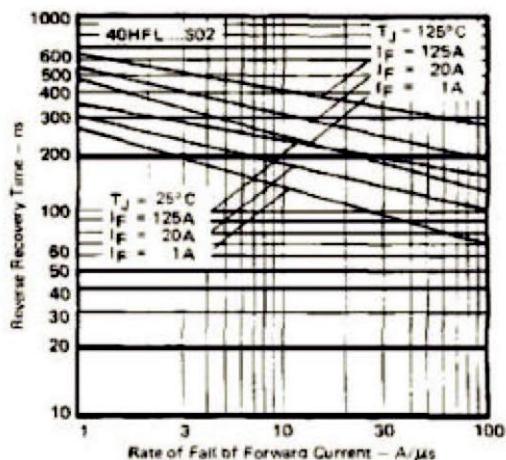


Fig. 19 - Typical Reverse Recovery Time vs. Rate of Fall of Forward Current, 40HFL...S02 Series

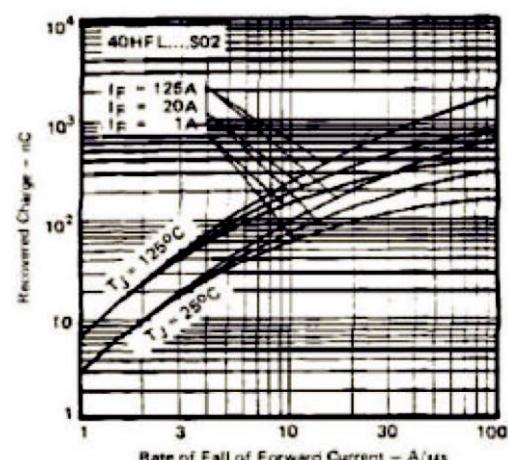


Fig. 20 - Typical Recovered Charge vs. Rate of Fall of Forward Current, 40HFL...S02 Series

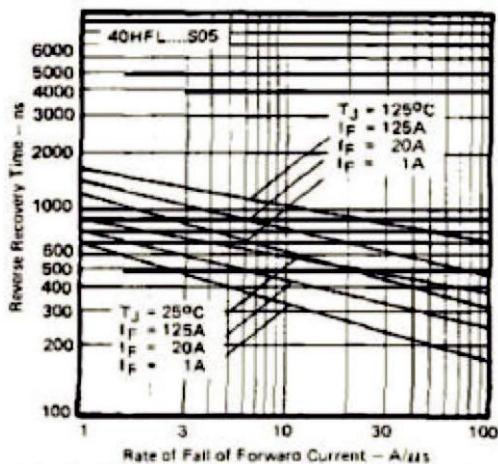


Fig. 21 - Typical Reverse Recovery Time vs.  
Rate of Fall of Forward Current, 40HFL...S05 Series

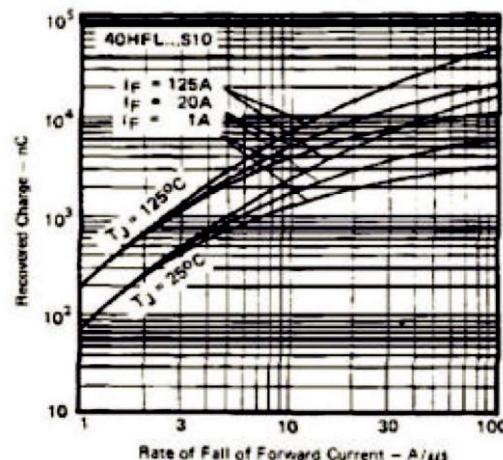


Fig. 24 - Typical Recovered Charge vs.  
Rate of Fall of Forward Current, 40HFL...S10 Series

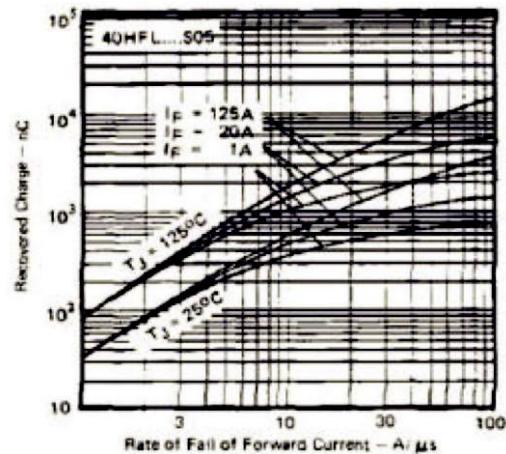


Fig. 22 - Typical Recovered Charge vs.  
Rate of Fall of Forward Current, 40HFL...S05 Series

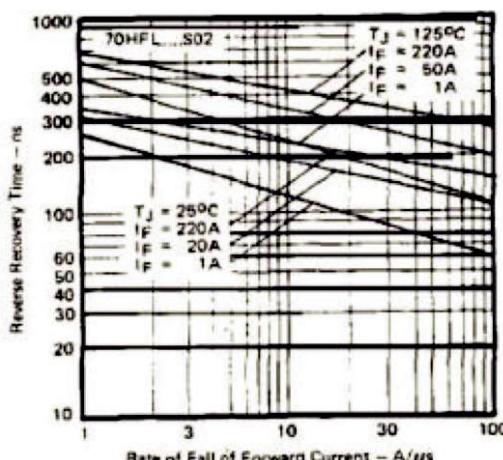


Fig. 25 - Typical Reverse Recovery Time vs.  
Rate of Fall of Forward Current, 70HFL...S02 Series

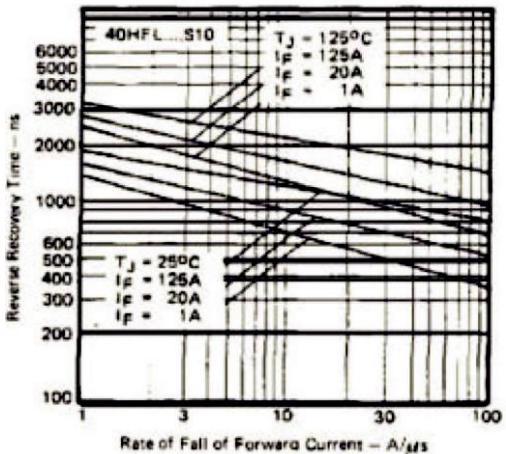


Fig. 23 - Typical Reverse Recovery Time vs.  
Rate of Fall of Forward Current, 40HFL...S10 Series

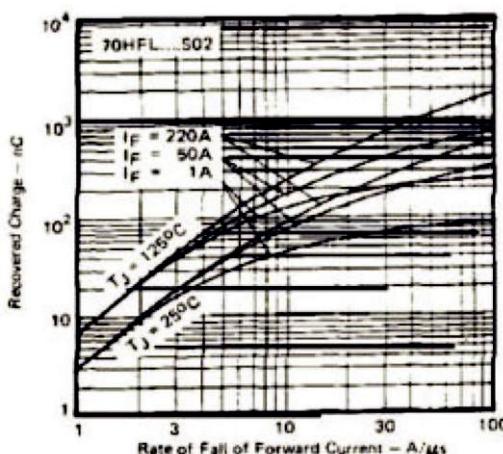


Fig. 26 - Typical Recovered Charge vs.  
Rate of Fall of Forward Current, 70HFL...S02 Series

# 40HFL, 70HFL, 85HFL Series

Vishay High Power Products

Fast Recovery Diodes  
(Stud Version), 40 A/70 A/85 A

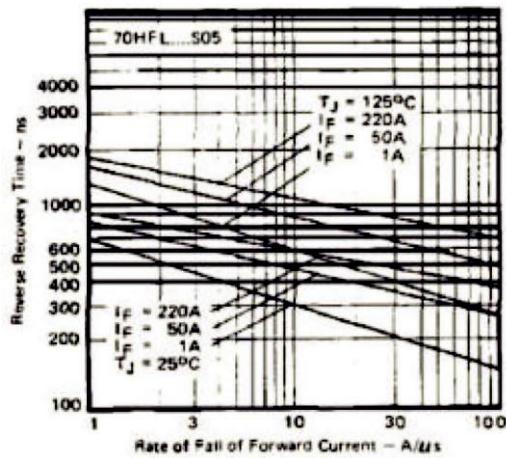


Fig. 27 - Typical Reverse Recovery Time vs.  
Rate of Fall of Forward Current, 70HFL...S05 Series

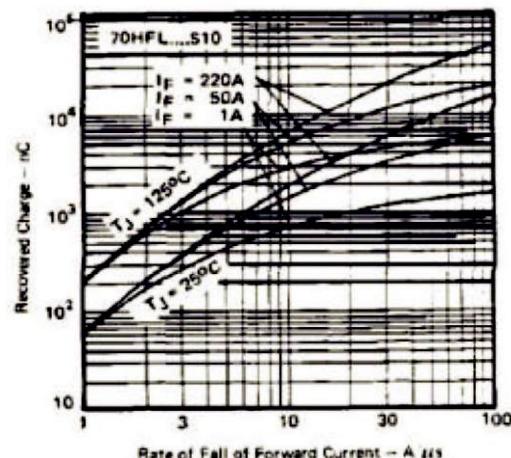


Fig. 30 - Typical Recovered Charge vs.  
Rate of Fall of Forward Current, 70HFL...S10 Series

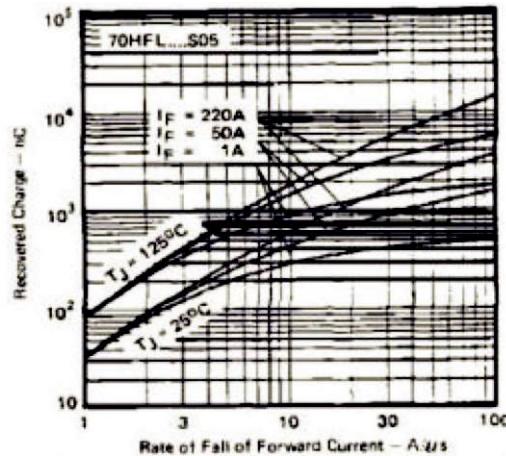


Fig. 28 - Typical Recovered Charge vs.  
Rate of Fall of Forward Current, 70HFL...S05 Series

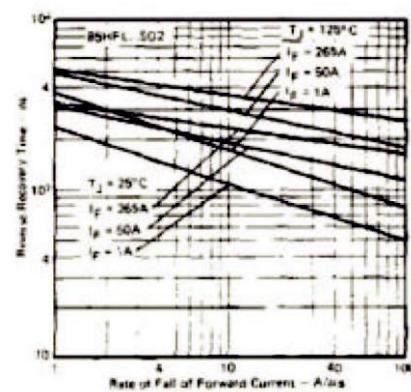


Fig. 31 - Typical Reverse Recovery Time vs.  
Rate of Fall of Forward Current, 85HFL...S02 Series

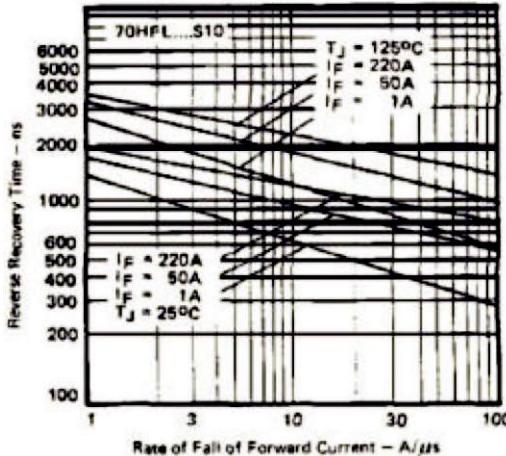


Fig. 29 - Typical Reverse Recovery Time vs.  
Rate of Fall of Forward Current, 70HFL...S10 Series

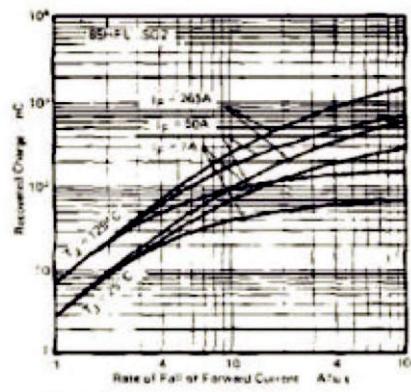


Fig. 32 - Typical Recovered Charge vs.  
Rate of Fall of Forward Current, 85HFL...S02 Series

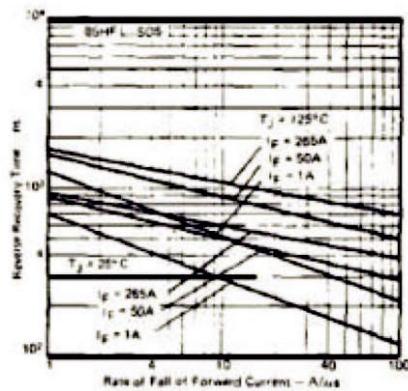


Fig. 33 - Typical Reverse Recovery Time vs.  
Rate of Fall of Forward Current, 85HFL...S05 Series

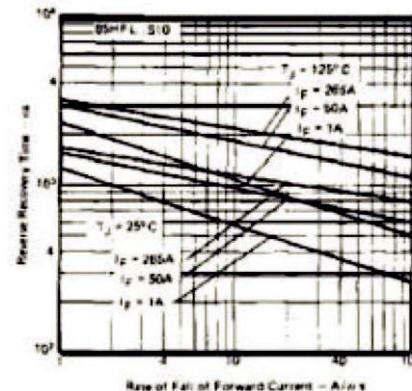


Fig. 35 - Typical Reverse Recovery Time vs.  
Rate of Fall of Forward Current, 85HFL...S10 Series

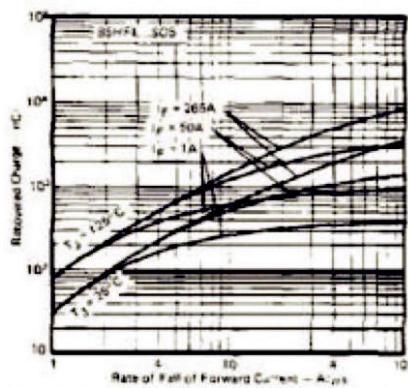


Fig. 34 - Typical Recovered Charge vs.  
Rate of Fall of Forward Current, 85HFL...S05 Series


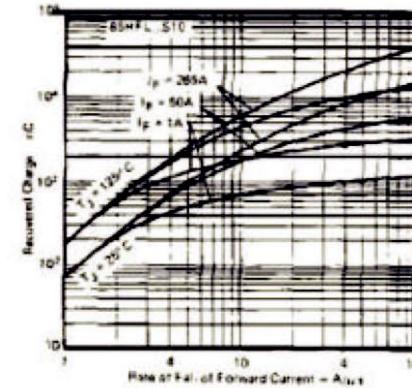


Fig. 36 - Typical Recovered Charge vs.  
Rate of Fall of Forward Current, 85HFL...S10 Series

LINKS TO RELATED DOCUMENTS	
Dimensions	<a href="http://www.vishay.com/doc?95312">www.vishay.com/doc?95312</a>

### DO-203AB (DO-5) for 40HFL, 70HFL and 85HFL

#### DIMENSIONS FOR 40HFL/70HFL in millimeters (inches)

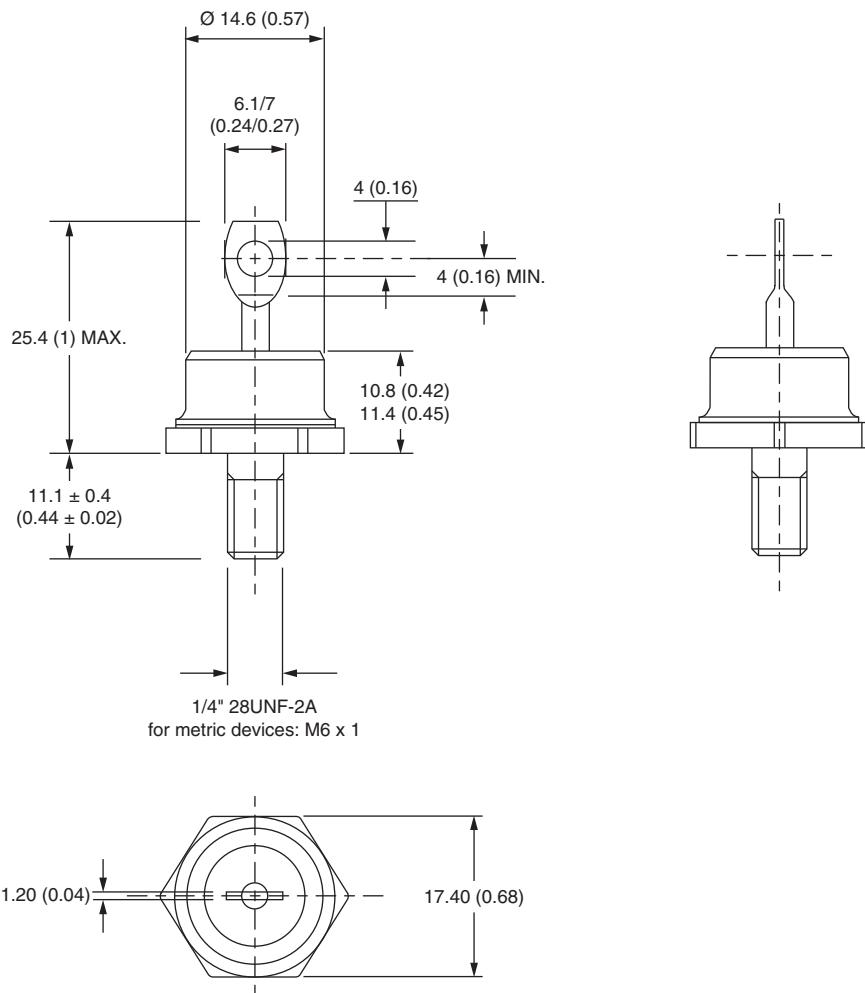


# Outline Dimensions

Vishay Semiconductors

DO-203AB (DO-5) for  
40HFL, 70HFL and 85HFL



## DIMENSIONS FOR 85HFL in millimeters (inches)

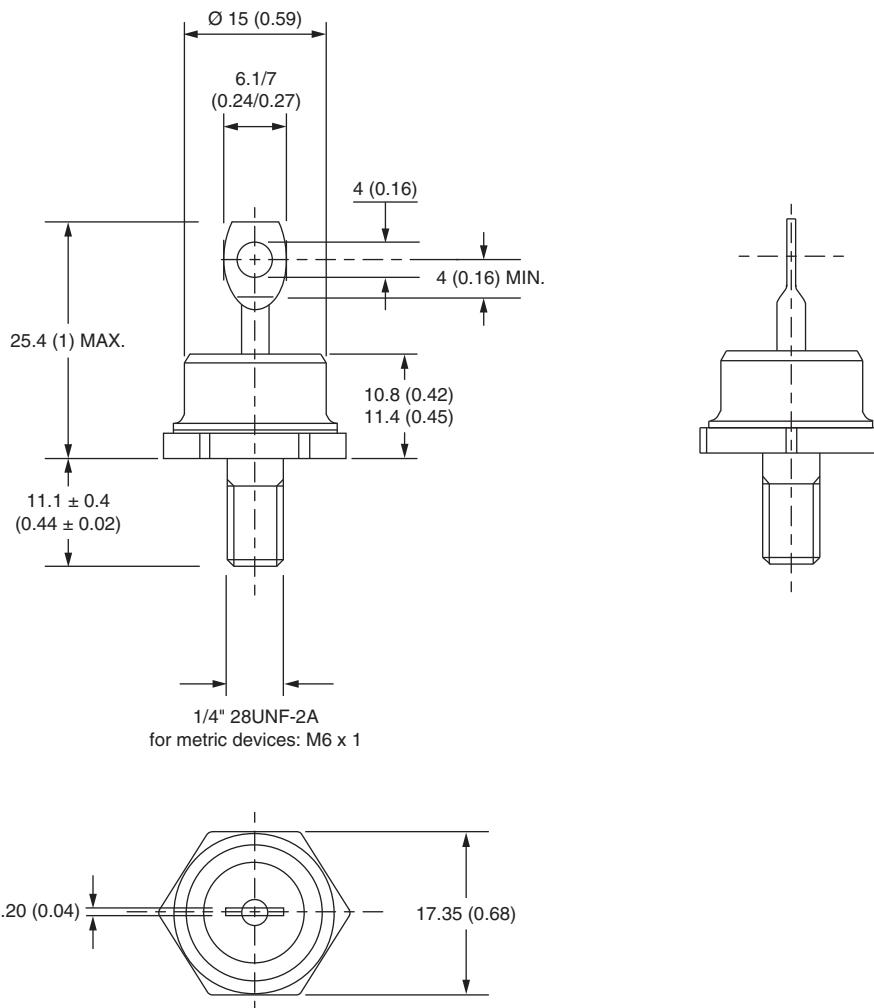

## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

[VS-40HFLR10S02](#) [VS-40HFLR40S05](#) [VS-40HFL10S05](#) [VS-40HFL40S05](#) [VS-40HFLR10S05](#) [VS-40HFLR20S02](#)  
[VS-40HFL20S02](#) [VS-70HFL40S02](#) [VS-70HFL10S02](#) [VS-70HFLR40S05](#) [VS-85HFL40S05](#) [VS-85HFL80S05](#) [VS-85HFL100S05](#)  
[VS-40HFL100S05](#) [VS-40HFL10S02](#) [VS-40HFL40S02](#) [VS-40HFL60S02](#) [VS-40HFL80S05](#) [VS-40HFLR100S05](#)  
[VS-40HFLR40S02](#) [VS-40HFLR60S02](#) [VS-70HFL10S05](#) [VS-70HFL20S02](#) [VS-70HFL20S05](#) [VS-70HFL40S05](#)  
[VS-70HFL60S02](#) [VS-70HFL60S05](#) [VS-70HFL80S05](#) [VS-70HFLR100S05](#) [VS-70HFLR20S02](#) [VS-70HFLR60S02](#)  
[VS-70HFLR80S05](#) [VS-85HFL20S02](#) [VS-85HFL40S02](#) [VS-85HFL60S02](#) [VS-85HFL100S05](#) [VS-85HFLR10S02](#) [VS-85HFLR10S02](#)  
[VS-85HFLR20S02](#) [VS-85HFL40S02](#) [VS-85HFL60S05](#) [VS-70HFL100S05](#) [VS-70HFLR40S02](#) [VS-85HFL80S05](#)  
[VS-85HFL60S05](#) [VS-85HFL10S05](#) [VS-40HFL20S05](#) [VS-70HFL60S05](#) [VS-85HFL10S02](#) [VS-85HFL20S05](#)  
[VS-85HFL40S05](#) [VS-40HFLR60S05](#) [VS-40HFL60S05](#) [VS-40HFLR80S05](#) [VS-70HFLR10S02](#) [VS-85HFL60S02](#)