


CATALOG NUMBER	CONDUCTOR (COPPER)				DIMENSIONS		INSTALLATION TOOLING (# OF CRIMPS)						
	RUN		TAP				DIE INFORMATION		MECHANICAL RATCHET	HYDRAULIC			
	MIN. AWG, kcmil	MAX. AWG, kcmil	MIN. AWG, kcmil	MAX. AWG, kcmil	H	L	COLOR CODE	DIE INDEX	TYPE	MD6, MD7	Y35, Y39 Y750, BAT35 BAT750	Y46 \triangleleft	Y45 \triangleleft
YP2C2	# 6 SOL (.162)	2 STR (.292)	#6 SOL (.162)	2 STR (.292)	1.45 [37]	.75 [19]	GREEN -----	0	DIE SET	----- PERMGR W-0	U-YF0 (1) U-0 (1)	U-YF0 (1) U-0 (1)	U-YF0 (1) U-0 (1)
YP28C28	2/0 STR (.414)	4/0 STR (.528)	2/0 STR (.414)	4/0 STR (.528)	2.06 [52]	1.00 [25]	BLUE -----	D3	DIE SET	----- PERMGR	U-YFD (1) U-D3 (1)	U-YFD (1) U-D3 (1)	U-YFD (1) U-D3 (1)
YP29C26	1/0 (.373)	250 (.575)	#4 SOL (.204)	2/0 (.419)	2.00 [51]	.75 [19]	BLUE -----	D3	DIE SET	----- PERMGR	U-YFD (1) U-D3 (1)	U-YFD (1) U-D3 (1)	U-YFD (1) U-D3 (1)

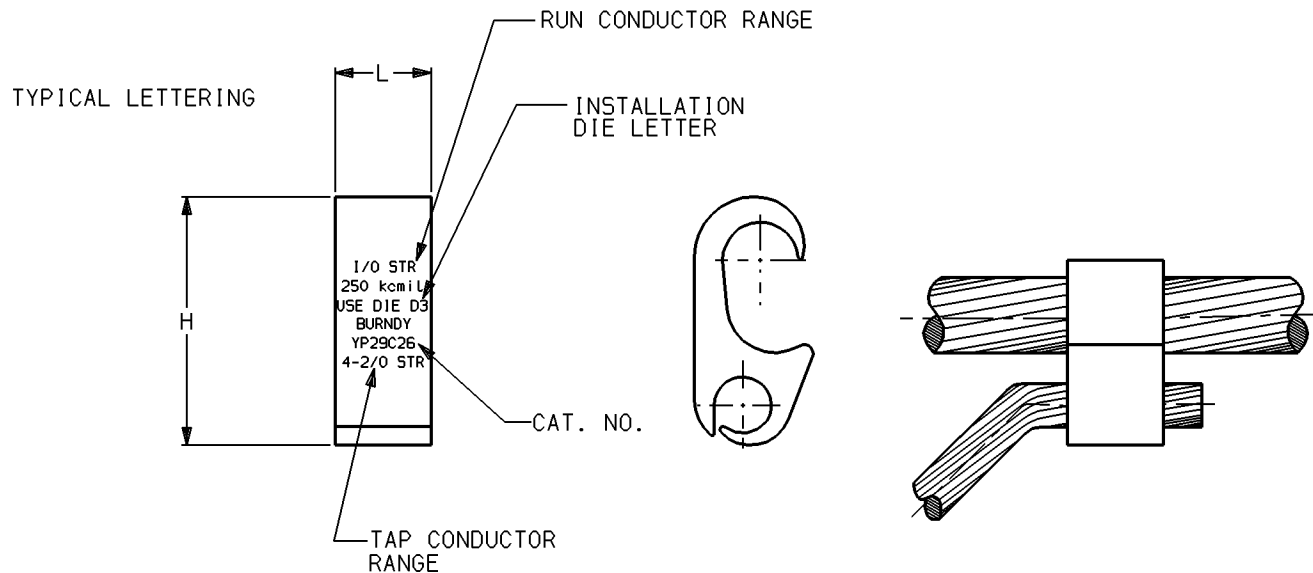

NOTES:

1. MATERIAL: COPPER
2. FINISH: TIN PLATED
3. CATALOG # PT6515 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y45 SERIES TOOLS.
4. CATALOG # PUADP-1 ADAPTOR IS REQUIRED TO USE "U" DIES IN Y46 SERIES TOOLS.
5. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.

REV: 061995

4	7/25/97	REVISED TABLE FORMAT AND REDREW TO CAD PER PCN '3219'	JRW	PL
REV.	DATE	DESCRIPTION	BY	C'K'D.

CRIMPIT™	
CAT NO: YP-C- (SEE TABLE)	SCALE N.T.S.
DRAWN: M.A.P.	2-9-65 CHECKED: ERO 2-10-65
DSGN APPVL: R.G.H.	2-11-65 MFG APPVL: .
G.A. APPVL: .	MKTG APPVL: N/A
CAD FILE: SC58072-SHT01	PM REF: N/A
FRAMATOME CONNECTORS USA INC.	MDL REF: N/A
BURNDY ELECTRICAL	PROJECT: D.O. 31369
MANCHESTER, NH 03108	DRAWING NO.
U. S. A.	REV
1-800-346-4175	SC58072
	SHEET 1 OF 1
	4