


Anwendung/Application :



Operating System (OS):

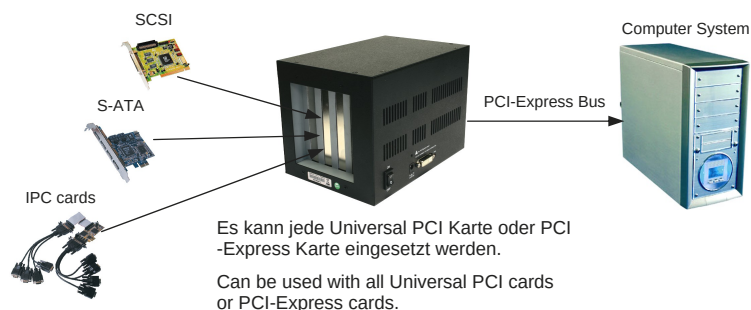

Geprüft/Approved:



Verpackung/Packing:



PCI-Express Bus zu 2 x PCI und 2 x PCIe Slot Expansion Box

Beschreibung :	Die EX-1020 ist speziell entworfen worden um je 2 weitere PCI und PCI-Express Slots über einen PCI-Express Slot zu erweitern. Die EX-1020 wird einfach mit der PCI-Express Adapter Karte an ein Motherboard, mit PCI-Express Bus angeschlossen. Es ist dann möglich jede im IT Markt erhältlichen Universal PCI Karten oder PCI-Express Karten über den PCI-Express Bus anzusteuern. Für die EX-1020 sind keine zusätzlichen Treiber nötig. Die Expansion box benötigt ein externes 12V Netzteil. Die maximale zu belastende Leistung ist 48W.
Merkmale :	- Erweitert 2 PCI 32-bit 33MHZ und 2 PCI-Express Slot's über den PCI-Express Slot - Unterstützt beide 5V und 3.3V PCI ADD-ON Karten - PCI Slot's sind PCI Bus Rev. 2.3 konform, PCI Express Base konform, Spezifikation: Revision 1.0a - PCI Express Advanced Error Reporting, Unterstützt Capability Including ECRC - Robustes Metall Gehäuse. Auch für Industrielle Anwendungen geeignet - Unterstützt Extended Virtual Channel (VC), Unterstützt Active State Link Power Management - Unterstützt Wake Event and Beacon - LowProfile Bügel mit einer maximalen Höhe von 8cm wird mitgeliefert - Benötigt ein 12VDC AC Power Netzteil
Chip-Set :	Texas Instruments
Datentransfer-Rate :	Bis 250Mbytes/sec, Full x1 PCI Express Throughput
Anschlüsse :	1 x DVI an der Expansion Box, 1 x DVI an dem PCI-Express Adapter
Hardwaresysteme :	PCI-Express Slot x1 bis x16
Betriebstemperatur : Luftfeuchtigkeit :	0 bis 55°C 5 bis 90%
Abmessung / Gewicht :	206 x 137 x 143mm / 1600g
Lieferumfang :	EX-1020, PCI-Express Adapter Karte, 1 Meter Kabel, 12V/48W Netzteil, Treiber CD, Handbuch

PCI-Express Bus to 2 x PCI and 2 x PCIe Slot Expansion Box

Description:	The EX-1020 PCI Express to Quad Slot Expansion Box is specially designed to expand 2 extra PCI and 2 PCI-Express slots from a PCI Express Slot. It includes a PCIe adapter card, a cable and the slot box itself. The box is powered by a 12VDC AC adapter. It provides instant PCI bus expansion via the PCI Express Bus (PCIe) from the Motherboard. The maximum used power 48W.
Feature :	- Expands 2 PCI 32-bit 33MHZ and 2 PCI-Express Slots over PCI Express Slot - Supports both 5V and 3.3V PCI Add-On Cards - Fully Compliant with PCI Express Base, PCI Slots are fully Compliant PCI Bus Rev. 2.3, Specifications, Revision 1.0a - PCI Express Advanced Error Reporting, Capability Including ECRC Support - Metal Case for Critical Applications - Extended Virtual Channel (VC) Support, Includes a Second VC for Quality-of-Service and - Active State Link Power Management Support, Wake Event and Beacon Support - Low Profile bracket with a maximum high of 8cm will included in the package 12VDC AC Power Adapter is Required
Chip-Set :	Texas Instruments
Data transfer rate :	Full x1 PCI Express Throughput, 250Mbytes/sec
Connectors :	1 x DVI connector by the Expansion Box, 1 x DVI by the ExpressCard Adapter
Hardware system :	PCI-Express Slot x1 to x16
Operating Temperature : Humidity :	0 to 55°C 5 to 90%
Size / Weight :	206 x 137 x 143mm / 1600g
Packaging contents :	EX-1020, PCI-Express adapter card, 1 meter cable, 12V/48W power supply, LowProfile bracket, Driver CD, manual