


Series 60 Door Switch-SPST **multicomp**

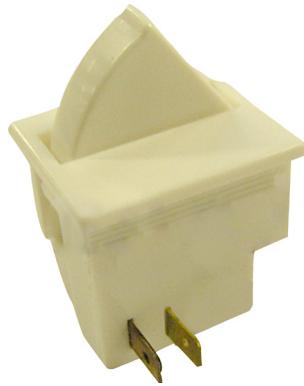



Technical Data:

Contact Gap	: μ-gap
Insulation Spacing	: ≥8mm
Resistance to Tracking	: PTI 250
Dielectric Strength	: Up to 2kV
Glow Wire Test	: 850°C (Category D)
Contact Resistance	: <20m Initially
IP Rating	: IP64
Insulation Resistance	: 50MΩ (500V DC between the open contacts) initially
Endurance	: Electrical Life ≥500,000 Cycles with 160W Lamp Load
Panel Cut-out	: Cutout Size : 22.86mm × 27.43mm
Operating Force	: Panel Thickness : 1mm to 2.54mm
Material	: Standard Force : 230gf
	: Light Force : 142gf
	: Housing : Nylon 6/6
	: Button : Nylon 6/6 or POM
	: Terminals : Brass/Phosphor Bronze
	: Contacts : Silver Alloy

Notes:

Panel Thickness	: 1mm/2.54mm
Rating	: 0.1A 125V AC
Terminal Type	: 4.8mm × 0.5mm Quick Connect
Gold Flash Contact	

Series 60 Door Switch-SPST **multicomp**

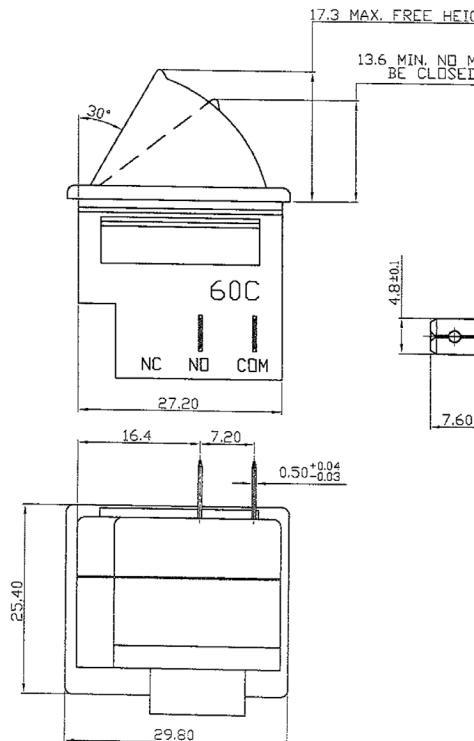

Recommended Panel Cutout

Dimensions : Millimetres



Part Number Table

Description	Part Number
Series 60 Door Switch-SPST	60CW-STDQCCU/V

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.