



AS-INTERFACE MOUNT. PLATE K60 FOR COMPACT MODULE K60 FOR 2 RIBBON CABLES, AS-INTERFACE CABLE (YELLOW) AND AS-INTERFACE CABLE 24V (BLACK)

### General technical data:

Type of device		accessories digital I/O modules for operation in the field, IP67 - K60
Design of the product		K60 mounting plate for wall mounting
Note 1		additional seals are required only when the flat cables end in the module (3RK1 902-0AR00)

### Connections:

connection		insulation piercing method for AS-Interface flat cable
Connection system		insulation piercing method for AS-Interface flat cable

### Mechanical design:

Type of mounting		for wall mounting
------------------	--	-------------------

### Ambient conditions:

ambient temperature	°C	-25 ... +85
degree of protection		IP67 with screw-mounted K60 compact module

### Certificates/approvals:

## General Product Approval



## Shipping Approval



## other

[Confirmation](#)

[Declaration of  
Conformity](#)

[Environmental  
Confirmations](#)

## Further information:

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

### Cax online generator


<http://www.siemens.com/cax>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1901-0CA00/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RK1901-0CA00](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1901-0CA00)

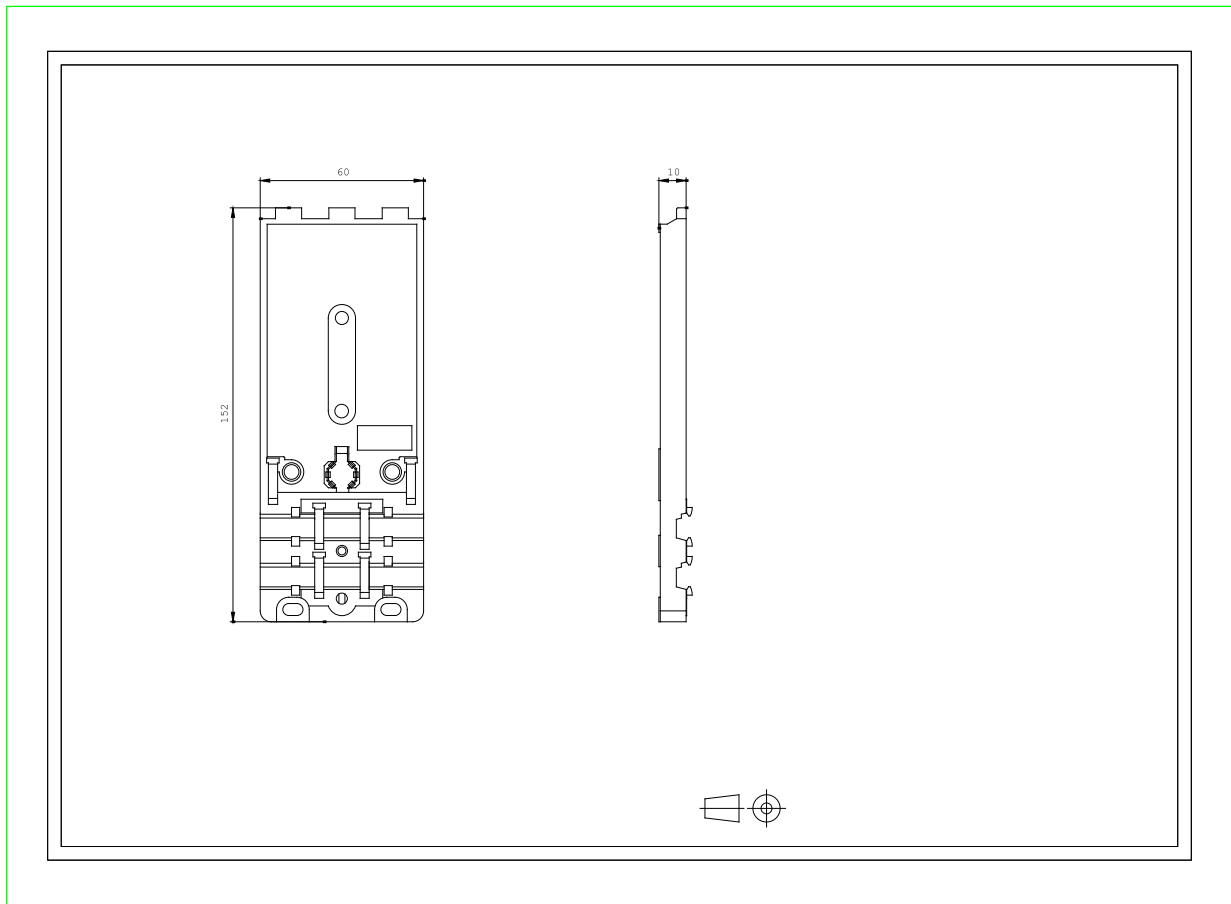

**last change:**

Mar 13, 2013