



Engineering Data


Maximum Switching Capacity Standard/G5V-2




High-sensitivity/G5V-2-H1




Durability Standard/G5V-2




High-sensitivity/G5V-2-H1



Ambient Temperature vs. Maximum Coil Voltage Standard/G5V-2




High-sensitivity/G5V-2-H1




Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.


Ambient Temperature vs. Must Operate or Must Release Voltage Standard/G5V-2




High-sensitivity/G5V-2-H1



Shock Malfunction Standard/G5V-2




High-sensitivity/G5V-2-H1




Conditions: Shock is applied in $\pm X$, $\pm Y$, and $\pm Z$ directions three times each with and without energizing the Relays to check the number of contact malfunctions.


Dial Pulse Test (with Must Operate and Must Release Voltage) *1 Standard/G5V-2




Dial Pulse Test (Contact Resistance) *1



Contact Reliability Test *1, *2 Standard/G5V-2




High-sensitivity/G5V-2-H1



- *1. The tests were conducted at an ambient temperature of 23°C.
- *2. The contact resistance data are periodically measured reference values and are not values from each monitoring operation. Contact resistance values will vary according to the switching frequency and operating environment, so be sure to check operation under the actual operating conditions before use.

High-frequency Characteristics


Measurement Conditions

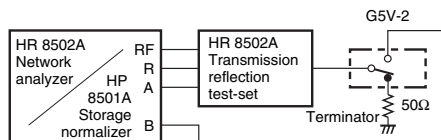


Terminals which were not being measured were terminated with 50 Ω.
Measuring impedance: 50 Ω

Note: The high-frequency characteristics data were measured using a dedicated circuit board and actual values will vary depending on the usage conditions. Check the characteristics of the actual equipment being used.


High-frequency Characteristics (Isolation) *1, *2

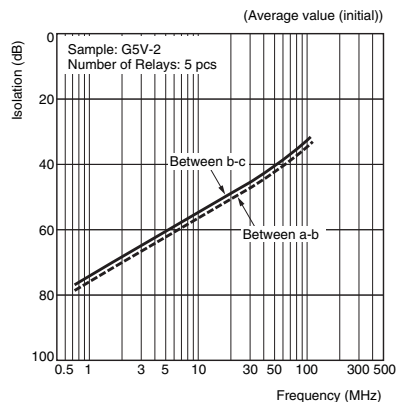


High-frequency Characteristics (Insertion Loss) *1, *2

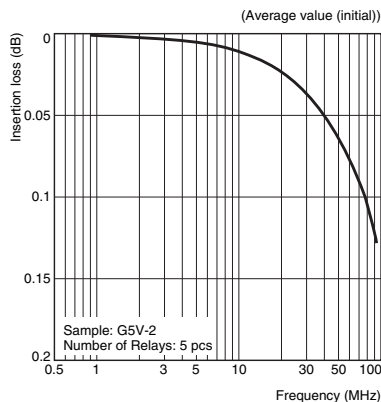


High-frequency Characteristics (Return Loss, V.SWR) *1, *2

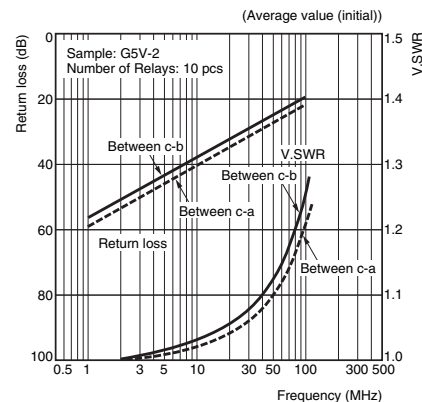


Must Operate and Must Release Time Distribution *1 Standard/G5V-2




Distribution of Bounce Time *1



Must Operate and Must Release Time Distribution *1 High-sensitivity/G5V-2-H1



Distribution of Bounce Time *1




*1. The tests were conducted at an ambient temperature of 23°C.


*2. High-frequency characteristics depend on the PCB to which the Relay is mounted. Always check these characteristics, including endurance, in the actual machine before use.

Dimensions


G5V-2

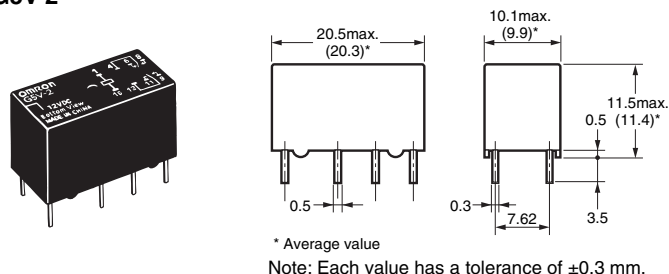

PCB Mounting Holes (Bottom View)



Terminal Arrangement/ Internal Connections (Bottom View)



Approved Standards

UL recognized: (File No. E41515)

CSA certified: (File No. LR31928)

Model	Contact form	Coil ratings	Contact ratings		Number of test operations
			G5V-2	G5V-2-H1	
G5V-2	DPDT (2c)	3 to 48 VDC	2 A, 30 VDC at 40°C	2 A, 24 VDC at 40°C	6,000
			0.6 A, 110 VDC at 40°C	0.2 A, 110 VDC at 40°C	
			0.6 A, 125 VAC at 40°C	0.5 A, 125 VAC at 40°C	

Note: Products with UL/CSA certification marks will be supplied for orders of standard models.

Precautions

• Please refer to "PCB Relays Common Precautions" for correct use.

Correct Use

Long-term Continuously ON Contacts

Using the Relay in a circuit where the Relay will be ON continuously for long periods (without switching) can lead to unstable contacts because the heat generated by the coil itself will affect the insulation, causing a film to develop on the contact surfaces. Be sure to use a fail-safe circuit design that provides protection against contact failure or coil burnout.

Relay Handling

When washing the product after soldering the Relay to a PCB, use a water-based solvent or alcohol-based solvent, and keep the solvent temperature to less than 40°C. Do not put the Relay in a cold cleaning bath immediately after soldering.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation
Electronic and Mechanical Components Company

Contact: www.omron.com/ecb

Cat. No. K046-E1-04
0812(0207)(O)