

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		Z2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

1. FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7519.
2. SWITCH HAS MAKE-BEFORE-BREAK OPERATION.
3. ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLACK.
4. STAMPING WILL VARY ON 2 POSITION SIDES DUE TO SPACE RESTRICTIONS.
5. .315 DIMENSION APPLIES AT TERMINAL TIPS. TERMINALS ARE .300 $\begin{smallmatrix} +.010 \\ -.000 \end{smallmatrix}$ AT MOUNTING SURFACE.
6. SWITCH POSITIONS ARE CLOSED WHEN ROCKERS ARE DOWN TOWARD DOTS.
7. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).
8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE 8	FIG 1	FIG 3	.48	DPDT	4	8-435470-1	8
	-FIG 1	AS SHOWN	1.28	SPDT	12	7-435470-6	8
	-FIG 1	AS SHOWN	1.08	SPDT	10	7-435470-5	8
	-FIG 1	AS SHOWN	.88	SPDT	8	7-435470-4	8
	-FIG 1	AS SHOWN	.48	SPDT	4	7-435470-2	8
OBSOLETE 8	FIG 1	FIG 4	.28	SPDT	2	7-435470-1	8
	AS SHOWN	FIG 2	.88	DPDT	8	5-435470-9	8
	AS SHOWN	FIG 4	.28	SPDT	2	5-435470-7	8
	AS SHOWN	FIG 3	.48	DPDT	4	5-435470-5	8
	AS SHOWN	AS SHOWN	.88	SPDT	8	5-435470-3	8
OBSOLETE 8	AS SHOWN	AS SHOWN	.68	SPDT	6	5-435470-2	8
	AS SHOWN	AS SHOWN	.48	SPDT	4	5-435470-1	8
	FIG 1	FIG 2	1.28	DPDT	12	3-435470-3	8
	FIG 1	FIG 2	.88	DPDT	8	3-435470-2	8
	FIG 1	FIG 3	.48	DPDT	4	3-435470-1	8
OBSOLETE 8	FIG 1	NONE	.88	SPDT	8	2-435470-7	8
	-FIG 1	AS SHOWN	1.28	SPDT	12	2-435470-6	8
	-FIG 1	AS SHOWN	1.08	SPDT	10	2-435470-5	8
	FIG 1	AS SHOWN	.88	SPDT	8	2-435470-4	8
	FIG 1	AS SHOWN	.68	SPDT	6	2-435470-3	8
OBSOLETE 8	-FIG 1	AS SHOWN	.48	SPDT	4	2-435470-2	8
	-FIG 1	FIG 4	.28	SPDT	2	2-435470-1	8
	AS SHOWN	FIG 2	.88	DPDT	8	435470-9	8
	AS SHOWN	AS SHOWN	1.28	SPDT	12	435470-8	8
	AS SHOWN	FIG 4	.28	SPDT	2	435470-7	8
OBSOLETE 8	AS SHOWN	FIG 3	.48	DPDT	4	435470-5	8
	AS SHOWN	AS SHOWN	1.08	SPDT	10	435470-4	8
	AS SHOWN	AS SHOWN	.88	SPDT	8	435470-3	8
	AS SHOWN	AS SHOWN	.68	SPDT	6	435470-2	8
	AS SHOWN	AS SHOWN	.48	SPDT	4	435470-1	8
ACTUATOR		TOP MARKING	A	SWITCH TYPE	NO. OF POSN	PART NO	

435470-3 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R.TALLEY
15MAR90

CHK
R.MILLER
27MAR90

APVD
H.LEITER
27MAR90

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=435470

RESTRICTED TO

MATERIAL
HOUSING & ROCKER; POLYESTER
CONTACTS; BERYLLIUM COPPER

FINISH
CONTACTS; PLATED .000030 MIN
GOLD IN CONTACT AREA OVER
.000050 MIN NICKEL

SCALE
4:1

SHEET
1 of 1

REV
Z2

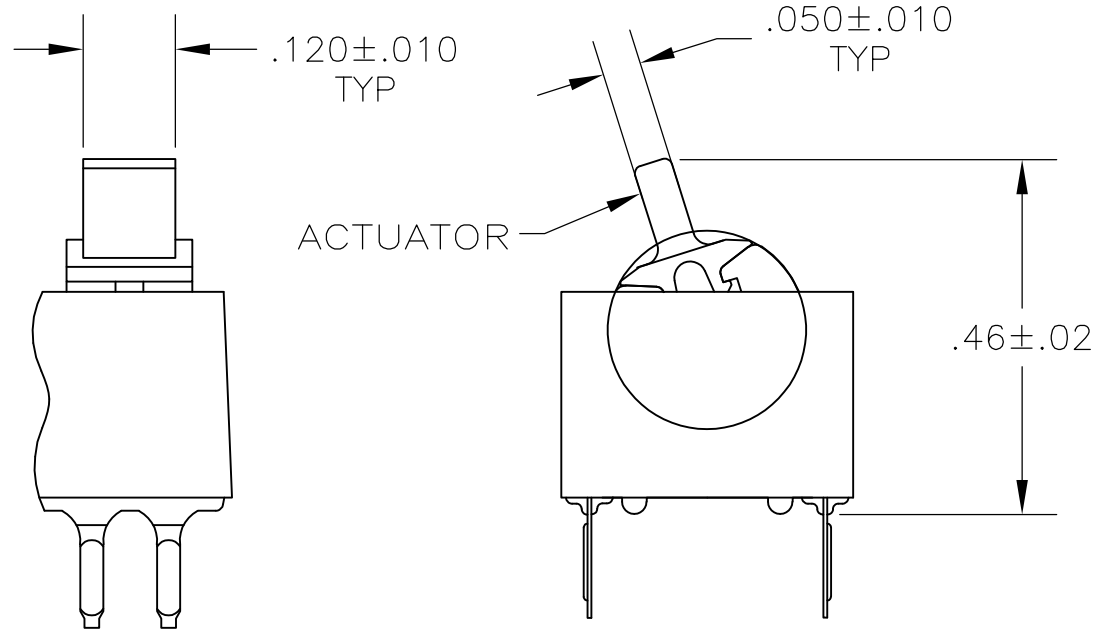
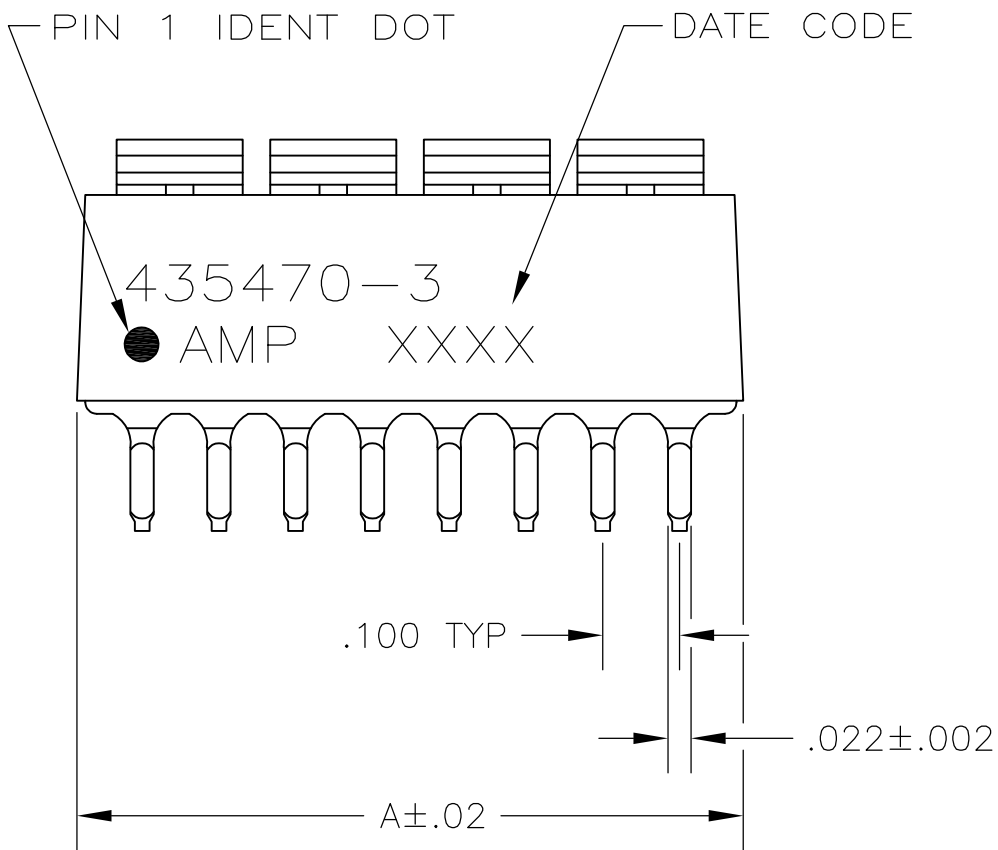
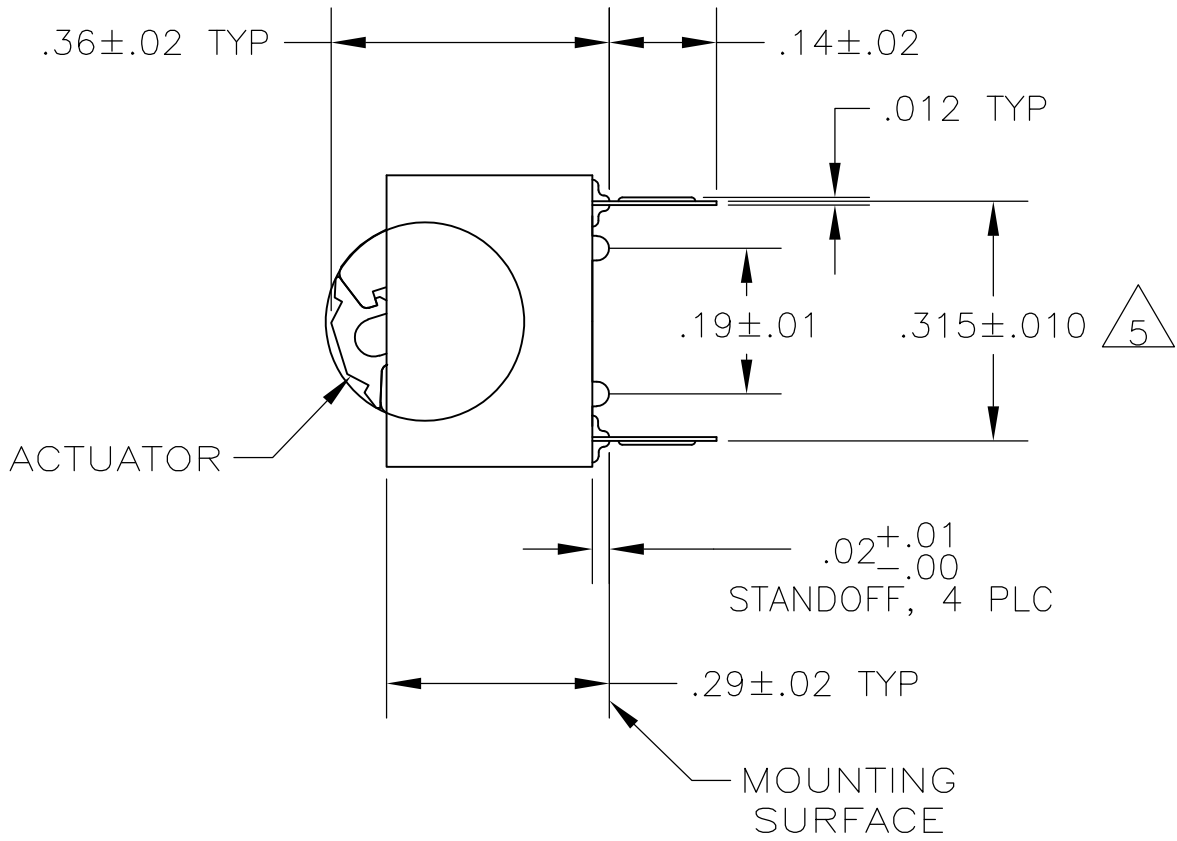
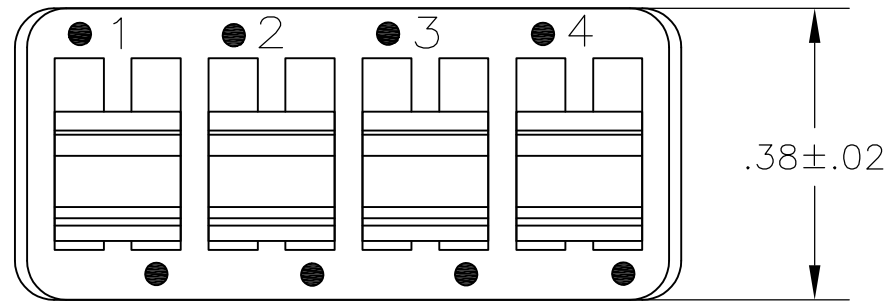


FIGURE 1
LEVER ACTUATOR SHOWN








FIGURE 2

FIGURE 3

FIGURE 4

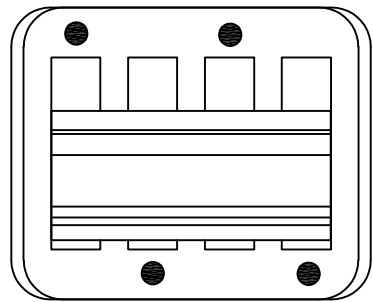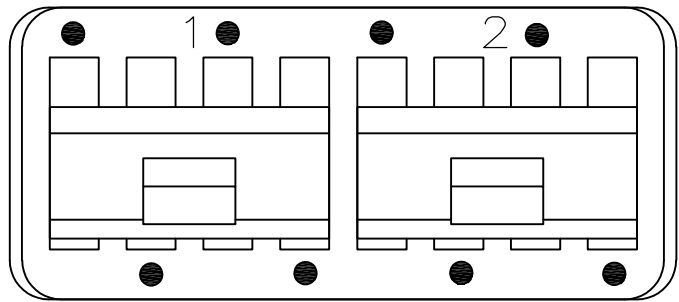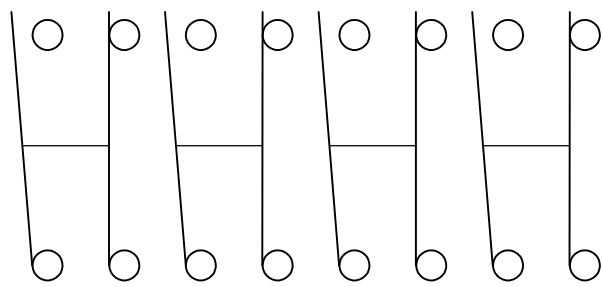

SPDT

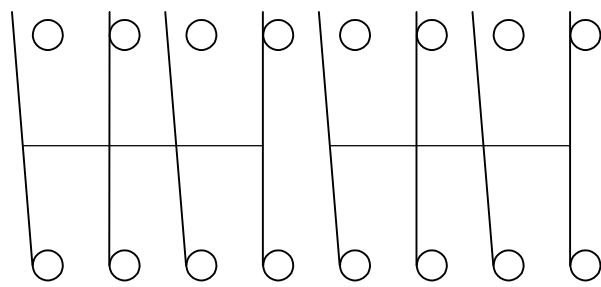

DPDT

CONTACT ARRANGEMENT